

2009



**promotion valid until 30/11/2009,
subject to availability**
prices do not include v.a.t.



New Item

C39 Aluminium^{AL}

Mobile roller cab

7 drawers (588x367 mm)
on ball bearing slides:
5 drawers, 70 mm high
1 drawer, 140 mm high
1 drawer, 210 mm high

Innovation Technology

1200
kg

Quick, user-friendly drawer opening system

Aluminium alloy base and uprights,
for enhanced sturdiness,
without affecting overall weight
of product.

Aluminium alloy frame: sturdier, lighter



Worktop made from
sturdy ABS



Rear bottle holders made from
reinforced sheet metal

- Side bottle holders made from sturdy ABS
- Integrated paper roll holder
 - Ergonomic, rubber-coated handle
 - Ball bearing slides
- Front centralised lock

971 mm
500 mm
800 mm

4 castors, Ø 125 mm
2 fixed and 2 steering (one with brake)

C39 O 039000001 59 kg

C39 G 039000002 59 kg

C39 R 039000003 59 kg



Roller cabs

COMFORTABLE
Handle at worktop level
for enhanced grip,
covered with antislip
terry cloth




MODULAR
Drawers can accommodate
up to 4 hard T-series
and/or new soft M-series
thermoformed trays



FUNCTIONAL
Integrated bottle holder
Integrated side tool holder
with interior partitions
Integrated paper holder



PRACTICAL
New opening system
throughout length
of drawer.



STURDY
Plastic bumper



4 castors \varnothing 125 mm:
2 fixed and 2 steering
(1 with brake)



C36/O-7 036000007 65 kg


C36/G-7 036000027 65 kg

C36/R-7 036000017 65 kg



C36/O-5

EVOLUTION roller cab
5 drawers (588x367 mm)
on ball bearing slides:
3 drawers, 70 mm high
1 drawer, 210 mm high
1 drawer, 290 mm high



C36/O-5 036000005 60 kg

C36/G-5 036000025 60 kg

C36/R-5 036000015 60 kg

C24/PM

Small tool holder



024000116

5,5 kg

C24/PU

Tool panel



024000119

3 kg

C24H

Mobile roller cab

7 drawers (588x367 mm),
on ball bearing slides:
1 drawer, 50 mm high
4 drawers, 80 mm high
2 drawers, 160 mm high



Bottle holder fitting
both sides

C24H/O 024000205 53 kg

C24H/G 024000206 53 kg

C24H/R 024000208 53 kg



4 castors Ø 125 mm: 2 fixed
and 2 steering (1 with brake)

900 mm
440 mm
700 mm

2499PP/M

Magnetic support for impact wrenches

- Fitted with 2 soft magnets preventing
metal surfaces from getting damaged
- PVC-coated metal frame
- Can accommodate 1 impact wrench,
4 sockets and 1 torque wrench



20 kg



1,3 kg

New Item

C28N

SuperTank trolley

11 drawers (588x367 mm),
with slides

5 side drawers:

1 drawer, 50 mm
3 drawers, 80 mm
1 drawer, 160 mm

6 front drawers:

1 drawer, 50 mm
5 drawers, 80 mm



Two holes for a vice
(1599 M100,
to be ordered
separately)



Foldaway door



Integrated tool holder

BUMPER



MULTI-PLY WOOD

1000 kg

4 castors ø 150 mm,
2 fixed and 2 steering
(both with brake)

950 mm
700 mm
1100 mm

C28N/O 028000004 135 kg

C28N/G 028000006 135 kg

C28N/R 028000007 135 kg

C38+C38T+2xC38L

“Expand your space”

C38



Sheet metal worktop covered with a foamed rubber mat


1200 kg

Mobile roller cab

11 drawers on ball bearing slides
 1 drawer 937x410x122 mm
 3 drawers 570x410x74 mm
 2 drawers 570x410x153 mm
 3 drawers 313x410x74 mm
 2 drawers 313x410x153 mm



Suitable for paper holder 2499PC and bottle holder 2499PF (to be ordered separately)



4 high-capacity castors:
 Ø 125 mm, 2 fixed and 2 steering (both with lever brake)


C38O 038000001 130 kg

C38G 038000003 130 kg

C38R 038000002 130 kg

C38T

Cab with 8 drawers and top chest for roller cab C38




C38T/O 038000091 70 kg

C38T/G 038000093 70 kg

C38T/R 038000092 70 kg

C38L

Side cab with 7 drawers.
 Can be placed on both sides of roller cab C38



C38L/O 038000081 50 kg


C38L/G 038000083 50 kg

C38L/R 038000082 50 kg

C56M

Work bench

- Metal worktop half covered with an antislip aluminium sheet and half covered with a removable antislip rubber mat
- Lower shelf made from hardwood



2000 kg

3x



C56M/O 056000050

C56M/G 056000053

C56M/R 056000054

86 kg

C41S

New Item

**Two-module tool trolley,
made from sheet steel**

Main features:

- Sheet metal frame and plastic tops, synonymous with remarkable sturdiness and reduced weight.
- 2 detachable modules:
1 upper tool box, 1 module with 2 drawers, 95 mm and 295 mm respectively.
- Telescopic aluminium handle.
- Small tool holder built into upper tool box.
- Designed to support a safety lock

OPTIMAL USE OF SPACE

-60% VOLUME vs. C40C

-14% WORKING VOLUME vs. C40C



Tool Containers

New Item

C41H

**Two-module tool trolley,
made from sheet metal**

Main features:

- Sheet metal frame and plastic tops, synonymous with remarkable sturdiness and reduced weight.
- 2 detachable modules: 1 upper tool box, 1 module with 2 drawers 95 mm in height, 1 pull-out case made of plastic, 66 mm high, and 1 drawer 295 mm in height.
- Telescopic aluminium handle.
- Small tool holder built into upper tool box.
- Designed to support a safety lock

OPTIMAL USE OF SPACE

-30% VOLUME vs. C40C

+10% WORKING VOLUME vs. C40C



Centralised side lock
for closing drawers of lower module.

1 pull-out case made of plastic

871 mm
335 mm
536 mm



Elastic bands fitted
into frame to carry levels
or hacksaws



Oversized castors
(160 mm),
built into frame
for easy transport -
for example, on steps.

920 mm
335 mm
536 mm



Drawers with ball bearing slides
and double closing hook.



041000001

16 kg

041000002

21 kg

C10

Tool box, made of fabric

- Hard base
- Articulated handle, to make it easier to get hold of tools in box
- Double bottom: detachable intermediate panel, to increase interior volume from 18 l to 23 l
- Removable tool tray built into bottom
- Functional interior tool pockets
- External hooks for measuring tape and insulating tape
- Pocket with Velcro closure for personal belongings
- Double string for levels
- Cover with Velcro closure, protecting from water
- Shoulder strap for easier transport



520x220x250 mm

021100000

New Item

3 kg

CP16

Tool box, made from plastic, removable tote-tray

- 2 aluminium clips.
- Large, folding aluminium handle throughout length of cover:
ENHANCED COMFORT AND REDUCED WEIGHT
- Rubber bumper protecting tool box from impact



500x260x260 mm

021160500

New Item

2,5 kg

CP17

Tool box made from stainless steel and plastic, removable tote-tray

500x200x220 mm

500 mm



practical
sturdy

CP17L

Tool box made from stainless steel and plastic, removable tote-tray, long model

575x245x265 mm

575 mm



021170500

2,5 kg

New Item

021170502

3 kg

C20L

Five-section cantilever tool box, empty
made from sheet metal

long
model


550x200x210 mm



021200002

6 kg

J09 assortment of 41 tools

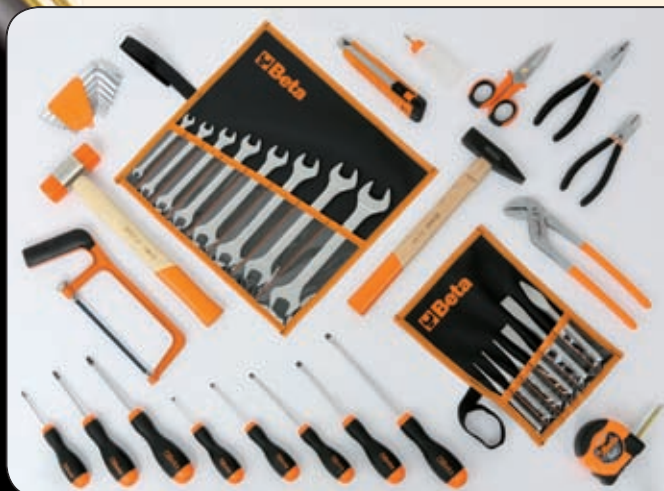


Beta n° description quantity

30	drift punches, Ø 2-3 mm	2
32	centre punch, Ø 4 mm	1
34	flat chisels, 125-150 mm	2
36	cape chisel, 150 mm	1
55	double open end wrenches, 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22 mm	8
96/SP9	offset hexagon key wrenches, 1,5-2-2,5-3-4-5-6-8-10 mm	9
1048	slip joint pliers, boxed joints, 240 mm	1
1082	diagonal cutting nippers, 160 mm	1
1128BMX	electrician's scissors	1
1150	combination pliers, 180 mm	1
1201	screwdrivers for slotted head screws, 2,5x50-3x75-4x100-5,5x100-6,5x150 mm	5
1202	screwdrivers for cross head Phillips® screws, PH0x60-PH1x80-PH2x100 mm	3
1370	engineer's hammer, 300 g	1
1390	soft face hammer	1
1691A/5	measuring tape, 5 m	1
1725CR	mini hacksaw frame	1
1755	plastic oil can, 30 cc	1
1771	utility knife	1

C41S/J09

Trolley C41S
with assortment
of 41 tools

041000209




21 kg

C41H/J09

Trolley C41H
with assortment
of 41 tools

041000219




26 kg

2116/J09

Tool box CP16
with assortment
of 41 tools

021160209




7,5 kg

2117/J09

Tool box CP17
with assortment
of 41 tools


021170209



7,5 kg

2117L/J09

Tool box CP17L
with assortment
of 41 tools




021170219

8 kg

2120L/J09

Tool box C20L
with assortment
of 41 tools



021200209

11 kg



2040UC

"Utility Case"
with assortment
of 33 tools

55	6x7-8x9-10x11-12x13-14x15-16x17 mm
96/SP9	1,5-2-2,5-3-4-5-6-8-10 mm
110	200 mm
1048	240 mm
1128BM	145 mm
1150	180 mm
1166	160 mm
1270	3x75-3,5x100-4x125 5,5x150-6,5x150 mm
1272	PH0x60-PH1x80-PH2x100 mm
1370	300 g
1692B/3	3 m
1727M	315 mm
1728BM	300 mm
1770	140 mm

405x365x80 mm

020400020

4,5 kg

2029/VV

Tool trolley,
made of thick polypropylene,
aluminium edged

- 1 removable tool panel, with elasticized pockets on both sides
- 1 removable tool panel with 2 pockets, self-adjusted according to tool, and elastic bands
- 2 metal locks with keys
- Soft rubber handle, for enhanced grip comfort
- Partitions on bottom, modular and removable
- Shoulder strap for easier transport
- Customizable identification plate



490x230x380 mm

020290000

New Item

5 kg



2036/TV

Tool trolley,
made of thick polypropylene,
aluminium edged

- Telescopic handle
- 2 castors with ball bearings
- 1 removable tool panel with elasticized pockets on both sides
- 1 removable tool panel with 2 pockets, self-adjusted according to tool
- 2 metal locks with keys
- Soft rubber handle for enhanced grip comfort
- Partitions on bottom, modular and removable
- Customizable identification plate



490x250x380 mm

020360000



New Item

6,5 kg

5938U1/P

Assortment of 160 tools
in thermoformed trays,
for roller cab C38 only

160x

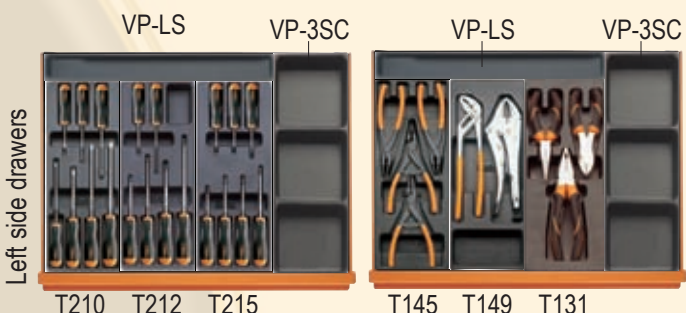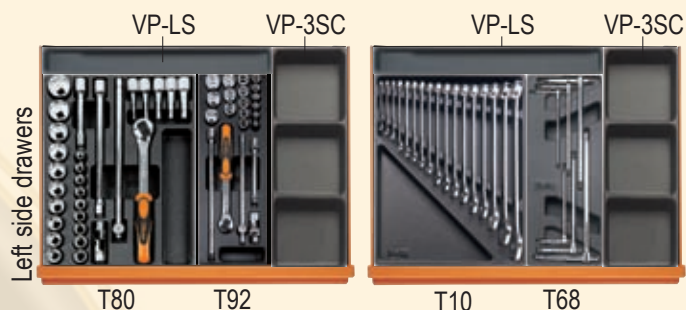


059380041

25 kg

62x

5988VU/09

Assortment of 62 tools
in thermoformed trays

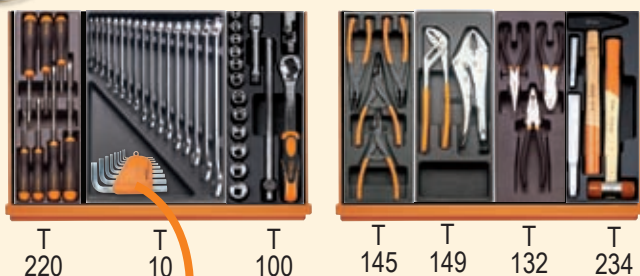

+ 96/SP9
O 1,5-2-2,5-3-4-5-6-8-10 mm

059880188



11,4 kg

Assortments

5988VUP/09

Assortment of 95 tools
in thermoformed trays

95x

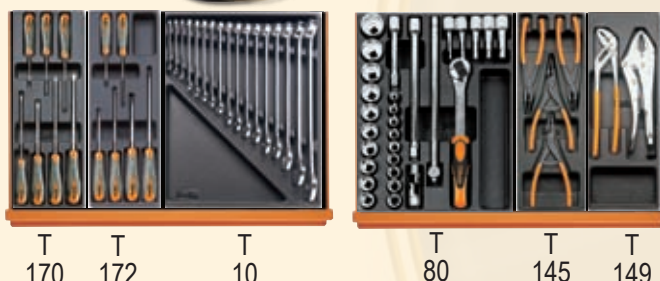

059880189

15,5 kg

5988VUM/09

Assortment of 90 tools
in thermoformed trays

90x



+ 96/SP9
O 1,5-2-2,5-3-4-5-6-8-10 mm



059880190

13,2 kg

5988VA/09



Assortment of 107 tools
in thermoformed trays


107x



T 170 T 172 T 80



T 145 T 149 T 131 T 234



T 52 T 35 T 15 T 16



T 63 VP 5

059880110


22 kg




5988VI/09

108x


Assortment of 108 tools
in thermoformed trays



T 170 T 172 T 80



T 145 T 149 T 131 T 234



T 52 T 35 T 15 T 16



T 236 T 290 VP 4 VP 4

059880120

16,7 kg

5988VI/E09




Assortment of 166 tools
in thermoformed trays


166x



T 76



T 15 T 16 T 233 T 145



T 82 T 90 T 263



T 170 T 172 T 236 T 147

+ 31/B6
31: 2-3-4-5-6-8 mm

059880125

16,5 kg




5988VA/E09

160x

Assortment of 160 tools
in thermoformed trays




T 170 T 171 T 172 T 176



T 82 T 90 T 15



T 75



T 145 T 263 T 233 T 131

059880115

17,3 kg

SOFT MODULE SYSTEM

Safety: unparalleled protection from impact and friction

Ease of recognition: orange bottom for immediate location of missing tools

Tidiness and rationalisation: optimally arranged tools

Durability: material resistant to weather, acids, salts, chlorine and hydrocarbons

Modularity: system interchangeable with hard T-series thermoformed trays



M15



42 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15
16 - 17 - 18 - 19 - 20 - 21 mm

024500015

1,5 kg

M16



42 22 - 24 - 27 - 30 - 32 mm

024500016

2,1 kg

M35



55 6x7 - 8x9 - 10x11 - 12x13 - 14x15
16x17 - 18x19 - 20x22 mm
96/SP9 1,5÷10mm

024500035

1,1 kg

M38



55 21x23 - 24x26 - 27x29
30 x32 mm

024500038

1,7 kg

M40



90 6x7 - 8x9 - 10x11 - 12x13
14x15 - 16x17 - 18x19 mm

024500040

810 g

M45



142 8 - 9 - 10 - 11 - 12 - 13
14 - 15 - 16 - 17 - 18 - 19 mm

024500045

1,3 kg

M46



142SN 8 - 9 - 10 - 11 - 12 - 13 - 14
15 - 16 - 17 - 18 - 19 mm

024500046

1,4 kg

M50



96T 2 - 2,5 - 3 - 4 - 5
6 - 7 - 8 mm

024500050

1,3 kg

M63



○ 952 7 - 8 - 10 - 12 - 13 - 14 - 17 - 19 mm

024500063

3,4 kg

M75



○ 933 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15
16 - 17 - 18 - 19 - 21 - 22 - 24 mm

024500075

5,5 kg

M82

12"



○ 920A 10-11-12-13-14-15-16-17-18-19
20-21-22-23-24-26-27-30-32 mm
920/ME 5-6-8-10-12 mm
920AN/125 125 mm □ 1/2 - ■ 1/2
920/22 255 mm □ 1/2 - ■ 1/2
920/25 □ 1/2 - ■ 1/2
920/42 ■ 1/2 920/55 ■ 1/2

024500082

4,1 kg

M90

14"



○ 900 4-4,5-5-5,5-6-7-8-9
10-11-12-13-14 mm
○ 900ME 2,5 - 3 - 4 - 5 - 6 - 8 mm
900/20 50 mm □ 1/4 - ■ 1/4
900/21 150 mm □ 1/4 - ■ 1/4
900/25 □ 1/4 - ■ 1/4
900/30 ■ 1/4
900/42 ■ 1/4 900/55 ■ 1/4

New Item

024500090

560 g

M92

3/8"



○ 910A 6-7-8-9-10-11-12
13-14-15-16-17-18-19-20-21-22 mm
910/21 125 mm □ 3/8 - ■ 3/8
910/22 250 mm □ 3/8 - □ 3/8
910/25 □ 3/8 - ■ 3/8
910/42 ■ 3/8
910/55 ■ 3/8

New Item

024500092

1,5 kg

M131



1084BM 160 mm
1150BM 180 mm
1166BM 160 mm

024500131

750 g

M145

○ 1032 180 mm
1034 170 mm
● 1036 175 mm
1038 175 mm

024500145

640 g

M149

1048 240 mm
1052 240 mm

024500149

1 kg

M170

● 1290 2,5x50 - 3x75 - 3,5x100
4x125 - 5,5x100
5,5x150 - 6,5x150 mm

024500170

450 g

M172

● 1292 PH0x60 - PH0x100
PH1x80 - PH1x120
PH2x100 - PH2x150 mm

024500172

450 g

M234

35 100-200 mm
1370 300 g
1390 ø 35 mm

024500234

1,3 kg

M236

■ 1719 BMA/Q 200 mm
▲ 1719 BMA/T 200 mm
■ 1719 BMA/P 200 mm
● 1719 BMA/M 200 mm
● 1719 BMA/R 200 mm

024500236

870 g

hard T-series thermoformed trays

T15



42 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15
16 - 17 - 18 - 19 - 20 - 21 mm

024240015

1,5 kg

T16



42 22 - 24 - 27 - 30 - 32 mm

024240016

2,1 kg

T30



31 Ø 2 - 3 - 4 - 5 - 6 mm
32 Ø 4 mm
55 6x7 - 8x9 - 10x11 - 12x13 - 14x15
16x17 - 18x19 - 20x22 - 21x23 - 24x26
27x29 - 30x32 mm
○ 96N/SP9 1,5÷10 mm

024240030

2,9 kg

T40



90 6x7 - 8x9 - 10x11 - 12x13
14x15 - 16x17 - 18x19 mm

024240040

810 g

T45



142 8 - 9 - 10 - 11 - 12 - 13 - 14
15 - 16 - 17 - 18 - 19 mm

024240045

1,3 kg

T46



142SN 8 - 9 - 10 - 11 - 12 - 13 - 14
15 - 16 - 17 - 18 - 19 mm

024240046

1,4 kg

T50



○ 96T 2 - 2,5 - 3 - 3,5 - 4 - 4,5
5 - 6 - 7 - 8 - 10 mm

024240050

1,3 kg

T63



○ 952 7 - 8 - 10 - 12 - 13 - 14 - 17 - 19 mm

024240063

3,4 kg

T73**New Item**

○ 930 6x7-8x9-10x11-12x13-14x15
16x17-18x19-20x22 mm

024240073

1,3 kg

T75

○ 933 7-8-9-10-11-12-13-14-15
16-17-18-19-21-22-24 mm

024240075

1,4 kg

T82**12"**

○ 920A 10-11-12-13-14-15-16-17-18-19
20-21-22-23-24-26-27-30-32 mm
920/ME 5-6-8-10-12 mm
920AN/125 125 mm □ 1/2 - ■ 1/2
920AN/250 250 mm □ 1/2 - ■ 1/2
920/25 □ 1/2 - ■ 1/2
920/42 ■ 1/2 920/55 ■ 1/2

024240082

4,1 kg

T90**14"**

○ 900 4-4,5-5-5,5-6-6-7-8-9
10-11-12-13-14 mm
○ 900ME 2,5 - 3 - 4 - 5 - 6 - 8 mm
900/20 50 mm □ 1/4 - ■ 1/4
900/21 150 mm □ 1/4 - ■ 1/4
900/25 □ 1/4 - ■ 1/4
900/30 ■ 1/4
900/42 ■ 1/4 900/55 ■ 1/4

024240090

560 g

T92**3/8"**

○ 910A 6-7-8-9-10-11-12-
13-14-15-16-17-18-19-20-21-22 mm
910/21 125 mm □ 3/8 - ■ 3/8
910/22 250 mm □ 3/8 - □ 3/8
910/25 □ 3/8 - ■ 3/8
910/42 ■ 3/8
910/55 ■ 3/8

024240092

1,5 kg

T100**12"**

○ 920A 10 - 12 - 13 - 14 - 15 - 16 - 17
18 - 19 - 21 - 22 - 24 mm
920/21 125 mm □ 1/2 - ■ 1/2
920/25 □ 1/2 - ■ 1/2
920/42 ■ 1/2
920/55 ■ 1/2

024240100

2,1 kg

T112**12" 14"**

○ 861TX T6÷T15
○ 866TX T20÷T55
895/1 □ 1/4x □ 1/4
895/6 □ 5/16x □ 1/2
○ 900FTX E4÷E10
○ 920FTX E12÷E24
○ 920TX T55L-T60-T70L

024240112

1,3 kg

T131

1084BM 160 mm
1150BM 180 mm
1166BM 160 mm

024240131

750 g

T132

1084 160 mm
1150 180 mm
1166 160 mm

024240132

650 g

T135

1000 V
IEC 60900



1082MQ 160 mm
1150MQ 180 mm
1166MQ 160 mm

024240135

750 g

T145

○ 1032 180 mm
○ 1034 170 mm
● 1036 175 mm
● 1038 175 mm

024240145

640 g

T149

1048 240 mm
1052 240 mm

024240149

1 kg

T170**Betamax**

- 1290 2,5x50 - 3x75 - 3,5x100 - 4x125
5,5x100 - 5,5x150 - 6,5x150 mm

024240170

450 g

T172**Betamax**

- 1292 PH0x60 - PH0x100 - PH1x80
PH1x120 - PH2x100 - PH2x150 mm

024240172


450 g

T176**Betamax**

- 1297TX T25 - T27 - T30 - T40 - T45

024240176


640 g

T180**Betamax**

- 1290 3x75 - 4x100 - 5,5x150 - 6,5x150 mm
● 1292 PH0x60 - PH1x80 - PH2x100

024240180

480 g

T200

- 1270 3x75 - 4x100 - 5,5x150
6,5x150 mm
● 1272 PH0x60 - PH1x80 - PH2x100

024240200


530 g

T210**Beta EASY**

- 1201 2,5x50 - 3x75 - 3,5x100
4x125 - 5,5x100 - 5,5x150
6,5x150 mm

024240210

490 g

T212**Beta EASY**

- 1202 PH0x60 - PH0x80
PH1x120 - PH2x100
PH2x150 - PH3x150 mm

024240212

490 g

T220**Beta EASY**

- 1201 3x75 - 4x100 - 5,5x150 - 6,5x150 mm
● 1202 PH0x60 - PH1x80 - PH2x100

024240220

530 g

T225

⚠ 1000 V ⚡
IEC 60900

- 1274MQ 3x100 - 4x100 - 5,5x125
6,5x150
● 1272MQ PH0x60 - PH1x80
PH2x100

024240225

460 g

T234

- 35 100-200 mm
1370 300 g
1390 ø 35 mm

024240234


1,3 kg

T236

- 1719BMA/Q 200 mm
▲ 1719BMA/T 200 mm
■ 1719BMA/P 200 mm
▶ 1719BMA/M 200 mm
● 1719BMA/R 200 mm

024240236

870 g

T263

- 96BP 2,5-3-4-5-6-8-10
○ 96N 12 mm
861MIX/S31
895/1 ○ 1/4 x □ 1/4

024240263

870 g

Wrenches

42/SC9I

New Item

Set of 9 combination wrenches
with compact support

8-10-11-12-13-14-15-17-19 mm



9x

9x

- compact, practical, easy-to-carry support
- quickly identified wrench size
- wrench safely locked in support



142/SC9I

Set of 9 reversible ratcheting
combination wrenches,
with compact support

8-10-11-12-13-14-15-17-19 mm

New Item



15x

42/SP15

Set of 15 combination wrenches
with support

6-7-8-9-10-11-12-13-14-15-16-17-19-22-24 mm



supplied with
a comfortable,
practical support



000420078

2,1 kg

55/SP7

Set of 7 double open end wrenches
with support

6x7-8x9-10x11-12x13
14x15-16x17-18x19 mm

supplied with
a comfortable,
practical support



000550167

920 g

12x

142C/A12

Set of 12 ratcheting combination
wrenches, straight short series,
in case

8-9-10-11-12-13-14-15
16-17-18-19 mm



suitable
for working
in small areas

001420175

1,5 kg

New Item

195P/B5

Set of 5 reversible ratcheting
double-ended angle head wrenches
in nylon bag

8x10-12x13-14x15-16x18-17x19 mm

5x



head angle: 15°
take-up angle: 5°



001950266

570 g

New Item

195FTX/B4

Set of 4 ratcheting double-ended
straight bi-hex wrenches for Torx®
head screws, in nylon bag

E6xE8 - E10xE12 - E14xE18 - E20xE24

take-up angle: 5°

4x



001950501

560 g



7x

90/S7

Set of 7 double ended deep offset ring wrenches

6x7-8x9-10x11-12x13-14x15-16x17-18x19 mm



000900163

1,3 kg

123/K4

Kit with 4 adapters for ratchet wrenches:

1 bit adapter

3 quick release adapters



practical



001230504

100 g

110PL

antislip functional

Adjustable wrenches with scale
handles coated with double layer PVC



110PL/200 L= 200 mm

001100620

300 g

110PL/250 L= 250 mm

001100625

390 g

110PL/300 L= 300 mm

001100630

800 g


933/S7

Set of 7 double ended offset hexagon socket wrenches

8-10-11-12-13-17-19 mm



7x

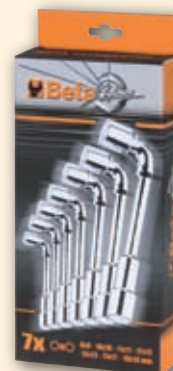

009330077


1,5 kg

Offset Hexagon Key Wrenches

96T/S5P

Set of 5 offset hexagon key wrenches with handles

○ 2,5-3-4-5-6 mm

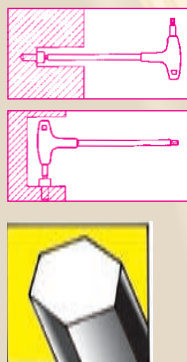

5x



000960946

350 g

96TBP/D5

Set of 5 ball head offset hexagon key wrenches with handles

○ 2,5-3-4-5-6 mm

New Item



5x




000960696

350 g

97TTX/S6

Set of 6 offset key wrenches with handles, for Torx® head screws

○ T10-T15-T20-T25-T30-T40

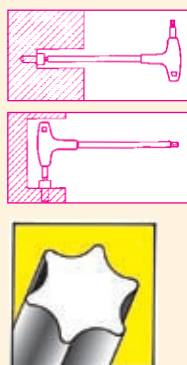

6x



000970795


310 g

951/S6

Set of 6 T-handle wrenches with three hexagon male ends

○ 2,5-3-4-5-6-8 mm

6x




009510687

350 g

96BPZ/SP9

Set of 9 ball head offset hexagon key wrenches

○ 1,5-2-2,5-3-4-5-6-8-10 mm



9x



400 g

000960369

97RTX/BM8

Set of 8 offset key wrenches for Tamper Resistant Torx® head screws

⊕ T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40

8x

BIMATERIAL SUPPORT




190 g

000970369

97BTX/SP8

Set of 8 ball head offset key wrenches for Torx® head screws



⊕ T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40



8x

162 g

000970161

861MIX/S31

Set of 30 bits with magnetic bit holder, in plastic case



1/4

- 861LP 0,5x3-0,6x4,5-0,8x5,5-1,0x5,5-1,2x6,5 mm
- 861PE 2-2,5-3-4-5-6-8-10 mm
- ⊕ 861PH PH0 - PH1 - PH2 - PH3 - PH4
- ⊕ 861PZ PZ1 - PZ2 - PZ3 - PZ4
- ⊕ 861RTX T9-T10-T15-T20-T25-T27-T30-T40
- 882M1 ○ 1/4 ● 1/4

260 g

008610984

1/4

861PHZ/S9

Set of 8 bits with magnetic bit holder, in plastic case



- ⊕ 861PH PH1 - PH2(x2) - PH3
- ⊕ 861PZ PZ1 - PZ2(x2) - PZ3
- 882M1 ○ 1/4 ● 1/4


128 g

008610340

Sockets

900/C36T

Assortment of 7 hexagon sockets and 27 1/4" drive bits, 1 adaptor and 1 T-handle bit holder in metal case

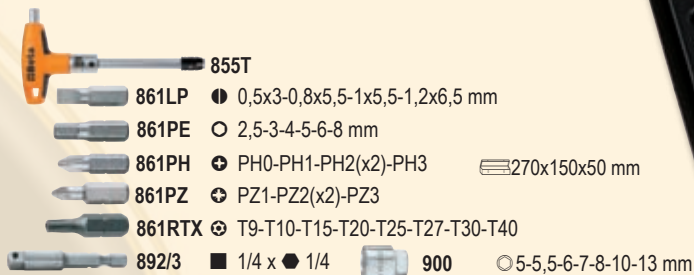

009000985

1,3 kg

1/4 1/4"




009000964

1,2 kg

920A/C17M

Assortment of 17 hexagon sockets and 5 accessories in soft thermoformed tray, in metal case

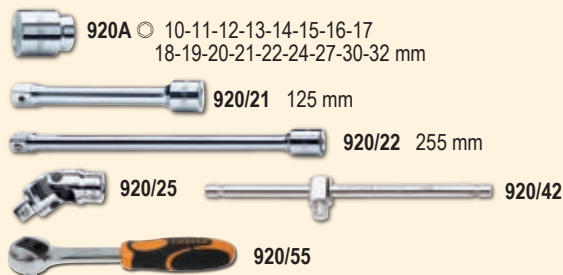


009200924

5 kg

SOFT
MODULE
SYSTEM

900/C12M

Assortment of 12 hexagon sockets, 20 bits and 7 accessories in soft thermoformed tray, in metal case

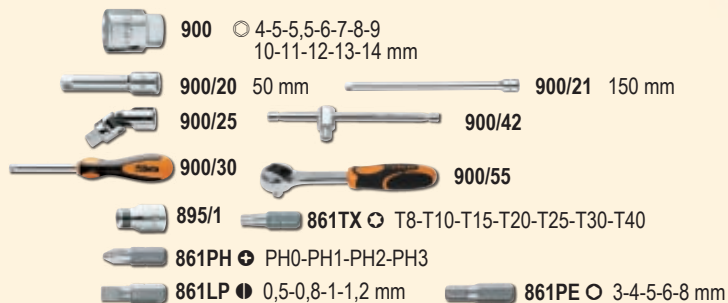

1/2"





1/4" 1/2"

902A/C22

Assortment of 22 hexagon sockets
and 6 accessories
in metal case

1/4"



900 ○ 5-5,5-6-7-8-9-10-11-12-13 mm



900/20 50 mm



900/25



900/55

1/2"



920A ○ 10-13-14-15-17-18-19
22-24-27-30-32 mm



920/21 125 mm



920/25



920/55

420x185x60 mm

009020807

3,5 kg



3/8"

910A/C16

Assortment of 16 hexagon sockets
and 5 accessories
in metal case



910A ○ 6-7-8-9-10-11-12-13-14
15-16-17-18-19-21-22 mm




910/21 125 mm



910/22 250 mm



910/42



910/25



910/55

335x145x60 mm

009100936

2,3 kg

928A/C9SN

Assortment of 9 hexagon sockets
and 4 accessories
in metal case



928A ○ 22-24-27-30-32-36-41-46-50 mm



928/22 380 mm




928/25

New Item



928/42



928/55

530x220x80 mm

009280959

11,9 kg

3/4"

606/...

*Click-type torque wrenches
with reversible ratchets*

Torque control

606/6

8 ÷ 60 Nm

L=305 mm

3/8"



006060105

600 g

606/10X

20 ÷ 100 Nm

L=345 mm

1/2"



006060111

800 g

606/20

40 ÷ 200 Nm

L=440 mm

1/2"



006060120

1 kg

606/30

60 ÷ 330 Nm

L=560 mm

1/2"



006060130

1,3 kg



677/C100

3/4"

*Break-back torque wrench
with push-through ratchet
in plastic case*

UNI EN 26789
ISO 6789

L= 1470 mm
300÷1000 Nm



006770615

9,5 kg

Screwdrivers

1293/V8

Set of 8 screwdrivers
in case



1294 ● 2,5x60-3x100-4x100 mm
1290 ● 5,5x150-6,5x150 mm
1292 ● PH0x60-PH1x80-PH2x100 mm

355x243x45 mm



Betamax
MAXIMUM PERFORMANCE

8x

012930217

1 kg

1297TX/D7

New Item

Betamax
MAXIMUM PERFORMANCE

Set of 7 screwdrivers

● T8-T10-T15-T20-T25-T27-T30



7x

012970419

800 g

1243/D6

Set of 6 screwdrivers with steel heads


1241 ● 5,5x100 – 6,5x125 – 8x150 mm
1242 ● PH1x100 – PH2x100 – PH3x150 mm



pass-through blade
for unscrewing
locked screws



steel head

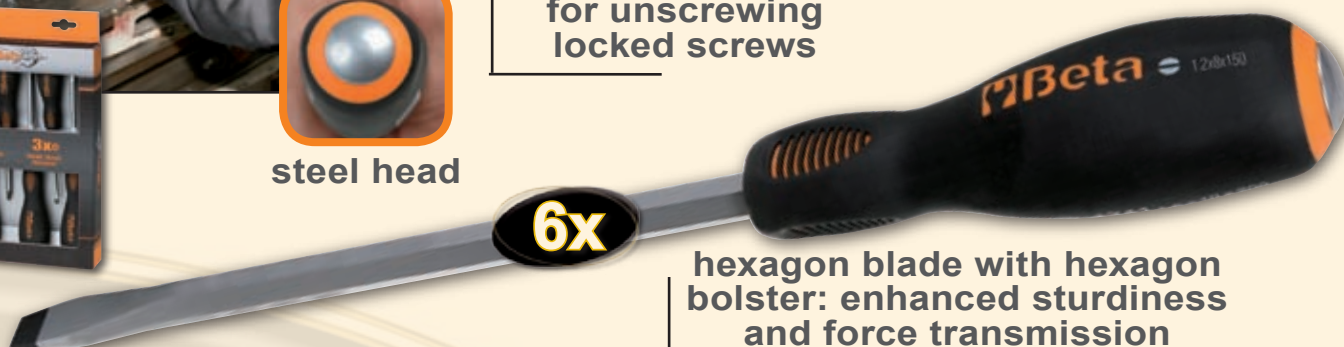

6x

hexagon blade with hexagon
bolster: enhanced sturdiness
and force transmission

012430015

750 g

1203/D12



Set of 12 screwdrivers

- 1201 ● 2,5x50-3x75-4x100-5,5x100-6,5x150-8x150 mm
- 1202 ● PH0x60-PH1x80-PH2x100-PH3x150 mm
- 1209PZ ● PZ1x80-PZ2x100 mm

12x



012030012

1,2 kg

1203/D10N



New Item

Set of 10 screwdrivers

- 1201 ● 2,5x50-3x75-4x100-5,5x150-6,5x150 mm
- 1201N ● 4x30 mm
- 1202 ● PH0x60-PH1x80-PH2x100 mm
- 1202N ● PH1x30 mm

10x

012030019

1 kg

1203/D8P



Set of 8 screwdrivers

- 1201 ● 2,5x50-3x75-4x100
5,5x100-6,5x150 mm
- 1202 ● PH0x60-PH1x80-PH2x100 mm

8x



012030018

650 g




1273/D9

Set of 9 screwdrivers

- 1270 ● 3x75-4x100-5,5x150-6,5x150 mm
- 1270N ● 4x30 mm
- 1272 ● PH0x60-PH1x80-PH2x100 mm
- 1272N ● PH1x30 mm

9x

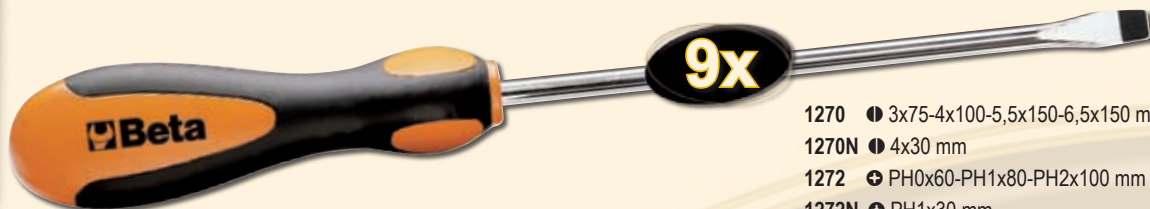

012730060

510 g



1281



1281/A9

Assortment of 9 reversible screwdrivers and 1 accessory in case

- 1281LPH/1 PH0-0,8x4 mm
- 1281LPH/2 PH1-1x5,5 mm
- 1281LPH/3 PH2-1,2x6,5 mm
- 1281PZ/1 PZ1-PZ2
- 1281PEO 2,5 mm
- 1281PEO 3 mm
- 1281PEO 4 mm
- 1281PEO 5 mm
- 1281PEO 6 mm

9x

New Item

012810609

400 g



1281

1281TX/A8

Assortment of 8 reversible screwdrivers and 1 accessory in case


- 1281LPH/1 PH0-0,8x4 mm
- 1281LPH/2 PH1-1x5,5 mm
- 1281LPH/3 PH2-1,2x6,5 mm
- 1281TX/1 T6-T8
- 1281TX/2 T7-T9
- 1281TX/3 T10-T15
- 1281TX/4 T20-T25
- 1281TX/5 T30-T40

8x

New Item

012810619

450 g



Beta




1295/C14

Impact screwdriver with 14 bits and 1 socket holder

- 866LP 1,2x6,5 - 1,6x10 mm
- 866PH PH2 - PH3
- 866PZ PZ2 - PZ3
- 866PE 5-6 mm
- 866TX T27-T30-T40-T45-T50-T55
- 895/6 1/2 - 5/16
- 1295 1/2

012950108

1,3 kg

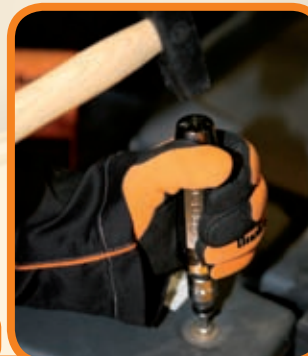

1273MQ/V8

Set of 8 insulated screwdrivers in case

- 1274MQ 3x100 - 4x100 - 5,5x125 - 6,5x150 mm
- 1272MQ PH0x60 - PH1x80 - PH2x100 mm
- 1279MQ PZ2x100 mm



8x

Beta

012730108

1 kg



1169BM/D2

Assortment of combination pliers (1 pcs.)
and diagonal cutting nippers (1 pcs.)



**bright chrome-plated finish
bimaterial handles**



1082BM 160 mm

1150BM 180 mm

011690142


500 g

1169/D2

Assortment of combination pliers (1 pcs.)
and diagonal cutting nippers (1 pcs.)



**bright chrome-plated finish
handles coated
with double layer PVC**

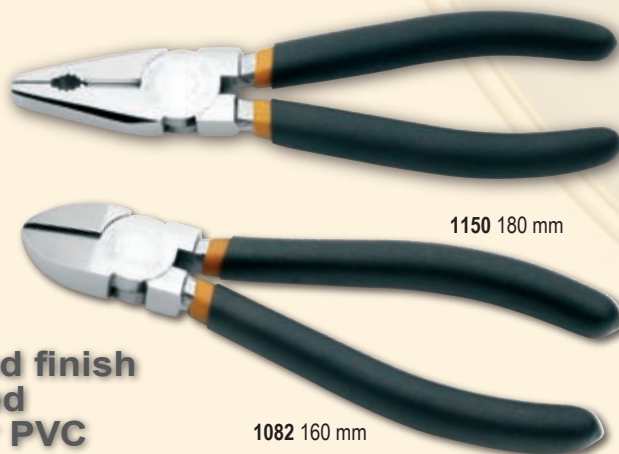

1150 180 mm


1082 160 mm

011690141

500 g

1031/S4

Set of 4 circlip pliers

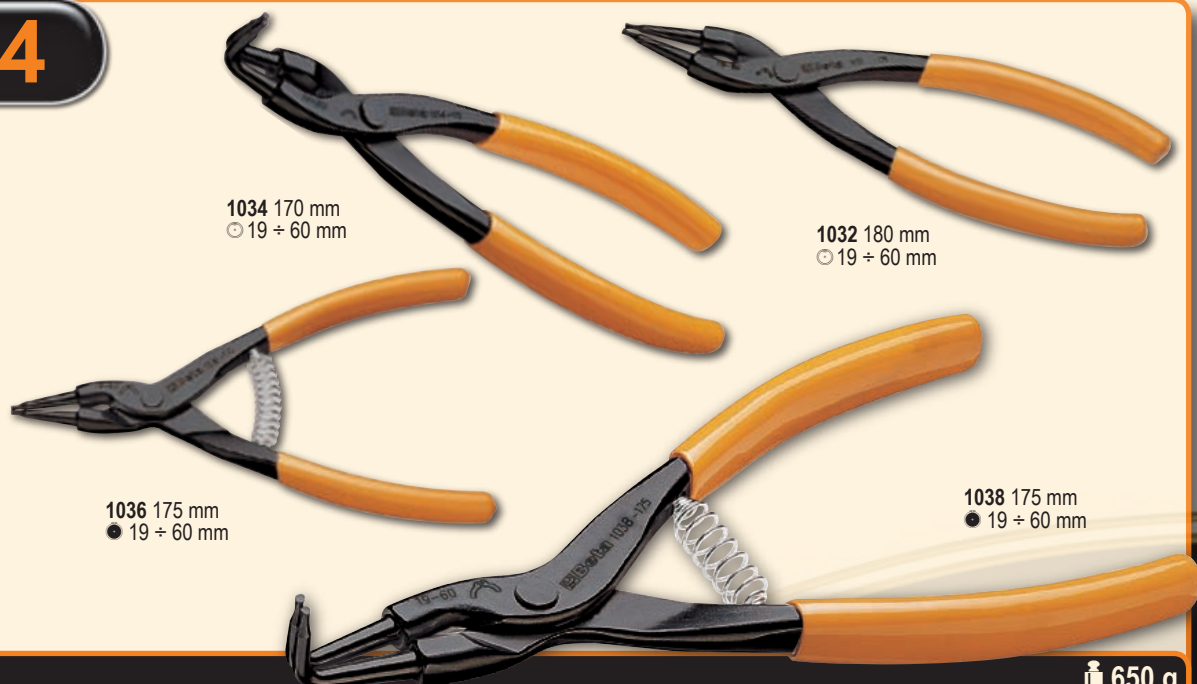

1034 170 mm
○ 19 ÷ 60 mm

1032 180 mm
○ 19 ÷ 60 mm

1036 175 mm
● 19 ÷ 60 mm

1038 175 mm
● 19 ÷ 60 mm

010310000

650 g

1057

New Item

Automatic self-locking pliers
with adjustable force


Length: 240 mm
Max. opening: 38 mm



- Can be used with one hand.
- Jaws are automatically adjusted to workpiece thickness
- Variable tightening force adjustment; set force remains steady regardless of workpiece thickness.

010570024

650 g

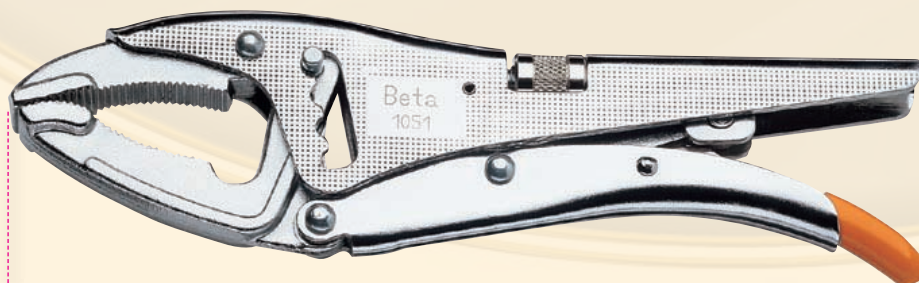

255 mm

1051

Double adjustment
self-locking pliers,
long jaws



010510025

770 g



IEC 60900



1169MQ/S2

Assortment of insulated
combination pliers (1 pcs.)
and insulated diagonal
cutting nippers

1150MQ 180 mm
1082MQ 160 mm

bright chrome-plated
finish


011690143

1 kg

1149F

Front wire stripping pliers
with cutting blade,
self-adjusting

- Automatic adjustment to cable and conductor diameters
- Adjustable stripping length
- Adjustable cutting pressure
- Quick, accurate stripping
- Built-in cutting blade

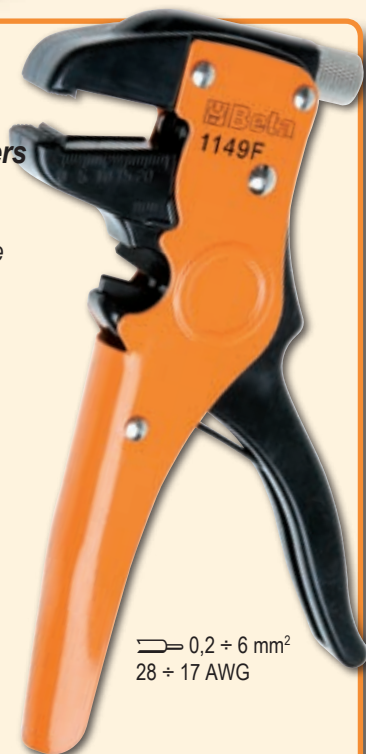

0,2 ÷ 6 mm²
28 ÷ 17 AWG

011490010

200 g

1760PA/AC

Amperometric clamp

CE




DC voltage	400 mV – 4/40/400/600 V
AV voltage	400 mV – 4/40/400/600 V
AC current	40/400/1000 A
Resistance	400Ω – 4/40/400 kΩ – 4/40 MΩ
Frequency	5/50/500 Hz – 5/50/500 kHz – 5/10 MHz
Capacity	40/400 nF – 4/40/100 μF
Temperature	-20 °C ÷ 1000 °C / -4 °F ÷ 1832 °F
Power supply	9V battery (included)

017600050

520 g

1193/S2

Assortment of 2 cutting nippers
for copper wire, max Ø 1 mm²



Bimaterial handles

1191BM 130 mm

oblique flushes

1188BM 125 mm

standard diagonal flushes

011930509

150 g

1608/C9

Crimping pliers
with assortment of 900 terminals,
1,5 ÷ 6 mm²

1620		1,5-2,5-6 mm ² 100 pieces/type
1624		1,5-2,5-6 mm ² 100 pieces/type
1628		1,5-2,5-6 mm ² 100 pieces/type



016080012

2,4 kg

Cutting tools

New Item

1122

*Compound leverage shears,
straight blades
bimaterial handles*

Straight cuts



011220020

500 g

**new
ergonomic
handles**

New Item

1123

*Right cut compound leverage
shears, curved blades
bimaterial handles*



**Chrome-plated,
microtoothed cutting edges**

Right cuts

011230020

500 g

Left cuts

New Item

1124

*Left cut compound leverage
shears, curved blades
bimaterial handles*



011240020

500 g

1726BM/K

**Hacksaw frame with quick release
blade attachment system
and 10 HSS-BIMETAL
COBALT blades**

- Quick, safe blade release system
- Maximum blade attachment: **255 kgf**
- Blade attachment can be adjusted through precision ring nut
- 45° and 90° angled blade
- Ergonomic bimaterial handle



+

10x

HSS-BIMETAL COBALT

017260250

800 g




1771BM

Betamax
MAXIMUM PERFORMANCE


Bimaterial utility knife, 18 mm long
Inner frame made from steel



Self-locking blade



Safety ring nut for enhanced stress resistance



Automatically reloaded blade



017710050

200 g



1778M


Foldaway knife

- aluminium handle
- blade locking mechanism
- fabric case with belt clip



017780040

100 g



1777T

Foldaway knife

- aluminium handle
- stainless steel frame, can be fastened to belt
- blade locking button



017770030

100 g

1130BMX


Multipurpose scissors

- Stainless steel blades
- Microtoothed blade
- Wire stripping device in handle
- Anti-loosening pin
- Safety blade locking system
- Bimaterial handles
- Blade locking lever



011300000

165 g

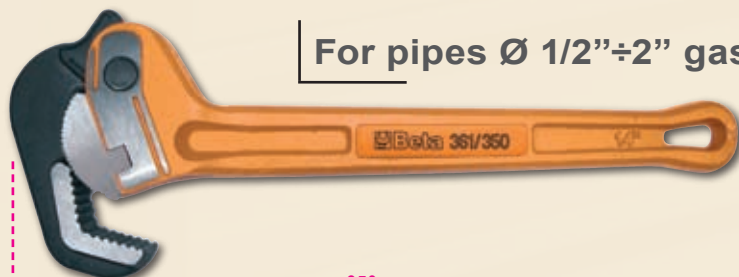

For pipes Ø 1/2"÷2" gas

361/350

Spring adjustable pipe wrench

practical
functional
sturdy

350 mm

003610035

560 g

362

Heavy duty pipe wrenches



L 300 mm ø 2" gas

003620030

1,2 Kg

L 450 mm ø 2"1/2 gas

003620045

2,5 kg

374

Pipe wrenches,
Swedish pattern,
45° slim jaws



L 320 mm ø 1" gas

003740032

820 g

L 410 mm ø 1"1/2 gas

003740041

1,4 kg

L 550 mm ø 2" gas

003740055

2,3 kg

352U

Adjustable tube flaring tool,
for copper and light alloy pipes



for pipes
Ø 3/16"÷5/8"

003520101

860 g

New Item

high-performance
cutting edges
for cutting hard pvc



for pipes
Ø 0÷1"5/8 gas

003420030

1,3 kg

342

Ratchet-type shears
for plastic pipes

Measuring Tools



1651DGT

Digital vernier
Reading to 0.01 mm / 0.0005"

016510111 300 g

1691A

Measuring tape

wear resistant
non-reflective
self-locking

- shock-resistant ABS casing
- nylon-coated tape
- automatic tape locking mechanism
- easy touch:
ergonomic release button



5 m


1691A/5 016910055 200 g

8 m

1691A/8 016910058 390 g

1696

Spirit level made from aluminium,
2 unbreakable vials,
accuracy 1 mm/m



L 200 mm

016960002


200 g

Hammers

1370T

Mechanic's hammers
plastic shafts
and fibreglass cores

three-material shafts:
ergonomic,
sturdy, lightweight

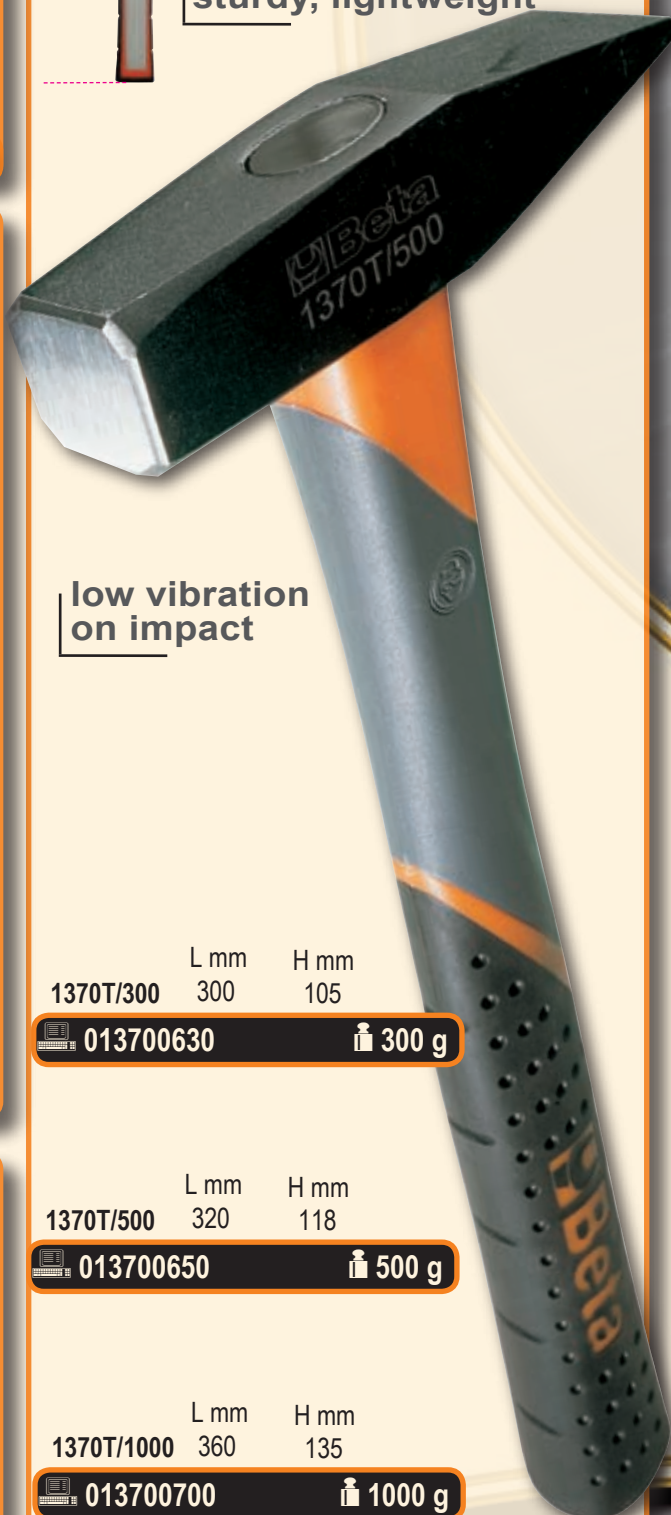

low vibration
on impact

	L mm	H mm
1370T/300	300	105

013700630 300 g

	L mm	H mm
1370T/500	320	118

013700650 500 g

	L mm	H mm
1370T/1000	360	135

013700700 1000 g

	L mm	H mm
1370T/1500	365	145

013700750 1500 g

1380T

Mason club hammers, fibre shafts



	L mm	H mm
1380T/800	260	85

013800308 800 g

	L mm	H mm
1380T/1000	260	110

013800310 1000 g

	L mm	H mm
1380T/1500	260	120

013800315 1500 g

38/B6

Set of 2 drift punches,
1 centre punch, 2 flat chisels
and 1 cape chisel,
in wallet

30: ø 2-3 mm

32: ø 4 mm

34: 125-150 mm

36: 150 mm



000380006

563 g

Drilling and Threading Tools

412E/SP19

Set of 19 drills,
HSS, entirely ground

Ø 1÷10 x 0,5 mm



004120436

550 g

415E/SP19

Set of 19 drills,
HSS-CO 8%, entirely ground

Ø 1÷10 x 0,5 mm

HSS-CO 8%



004150429

550 g

450CO/C11



Assortment of 11 HSS-CO 8% BI-METAL
holesaws and 2 arbors

New, more effective
toothings



Ø 20-22-25-30
32-35-40-44
51-60-64 mm

HSS-CO 8%

265x215x80 mm

004500328

1,8 kg

424/SP3

Set of 3 conical drill bits, HSS
in metal case

Ø 3-30,5 mm




3x

004240019

600 g

426MD/SP10

Set of 10 rotary files,
for steel (including stainless steel)



8/12 mm Ø 6 mm

10x



004260510

900 g

430 M mm	433 M mm	440/440A M mm	441/441A M mm
2x0,4	6x0,75	2x0,4	6x0,75
3x0,5	7x0,75	3x0,5	7x0,75
4x0,7	8x0,75	4x0,7	8x0,75
5x0,8	8x1	5x0,8	8x1
6x1	9x0,75	6x1	9x0,75
7x1	9x1	7x1	9x1
8x1,25	10x0,75	8x1,25	10x0,75
9x1,25	10x1	9x1,25	10x1
10x1,5	10x1,25	10x1,5	10x1,25
11x1,5	11x0,75	11x1,5	11x0,75
12x1,75	11x1	12x1,75	11x1
14x2	11x1,25	14x2	11x1,25
	12x0,75		12x0,75
	12x1		12x1
	12x1,25		12x1,25
	12x1,5		12x1,5
	14x1		14x1
	14x1,25		14x1,25
	14x1,5		14x1,5
	16x1		16x1



1651DGT



446/C111

Assortment of 105
chrome-steel taps and dies,
5 accessories
and 1 digital vernier
in wooden case

004460011

4 kg

437U/09

Assortment for repairing damaged threads
M5-M6-M8-M10-M12

M 5x0,8
M 6x1,0
M 8x1,25
M 10x1,5
M 12x1,75



004370550

2 kg

Pullers

1500N/...

Universal pullers with 2 sliding,
self-locking legs

	Load	A max
1500N/0	5000 kg	65 mm

015000600 **New Item** 700 g

1500N/1	6000 kg	90 mm
---------	---------	-------

015000601 700 g

1500N/2	6000 kg	120 mm
---------	---------	--------

015000602 800 g

1500N/3	10000 kg	170 mm
---------	----------	--------

015000603 2,1 kg



sliding, self-locking legs
for quick placement
and firm grip

1860K/140A-160A




New Item



Inverter welding machine, suitable for motor generators, compact and easy to carry. Complete with cables, hammer brush, mask and shoulder strap.

made in Italy



1860K/140A

MAX 3.0 KVA
electrodes up to 3.2 mm,
with excellent material
penetration.

1860K/160A

MAX 3.7 KVA
for absolutely safe soldering on
thick supporting frames.
Outstanding mechanical
characteristics guaranteed
under any condition.

018600014

4,0 kg

018600016

4,2 kg

1827/K

Gas soldering iron with 7 accessories
in case with soft polyethylene foam base

- Power: 30 watts to **125 watts**
- Tip temperature can be adjusted between 250 °C and 500 °C
- Gas flow regulator
- Warm-up time: 15 seconds
- Tank contains gas for 120 minutes' non-stop operation
- Clear tank for monitoring gas level
- Can be refilled with butane gas

- 3 different soldering tips
- Soldering tin wire
- Spare nozzle
- Tip cleaning sponge
- Protective cap



Supplied without gas



018270100

580 g

1712E/L1

Flexible magnetic pickup tool
with LED light



max 750 g



017120111

200 g

1851VK

Hot glue gun
supplied with 12 thermofusible glue sticks
in case



for stick glue
ø 11 e 12 mm

power: 80 watts



12x



018510058

600 g

1740A

Increased force,
reduced effort

**Heavy duty riveting pliers with 5 interchangeable
mandrels** (3,2; 4; 4,8; 5; 6; 6,4 mm)



ø mm	3,2	4	4,8	5	6	6,4
stainless steel	•	•	•	•	•	•
inox	•	•	•	•	•	•

017400101

2 kg

1741/C5

**Riveting pliers with 4 interchangeable
mandrels and 700 aluminium rivets**
in metal case



	ø mm	L mm	n.
1741RV2,9K	2,9	6	200
1741RV3,2K	3,2	8	200
1741RV3,8K	3,8	10	100
1741RV4K	4,0	12	100
1741RV4,8K	4,8	12	100

420x160x60 mm

017410005

3,1 kg


New Item

1838

Rechargeable LED lamp

- Water, oil and grease resistant
- Hangable, with antislip, shockproof rubber body
- Lithium polymer battery: lightweight, lifetime 8 hours
- 30 high-brightness 100,000-hour LEDs
- Front low-battery LED

No memory effect
100,000-hour LEDs

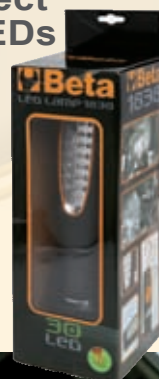

018380001

600 g

560/C6

Torque multipliers for right-hand and left-hand tightening in plastic case

Complete with straight reaction lever and reaction foot



☐ 1/2"
☒ 3/4"


400x260x110 mm

005600160



- Ratio: 6.5:1
- Max. torque: 1500 Nm

New Item

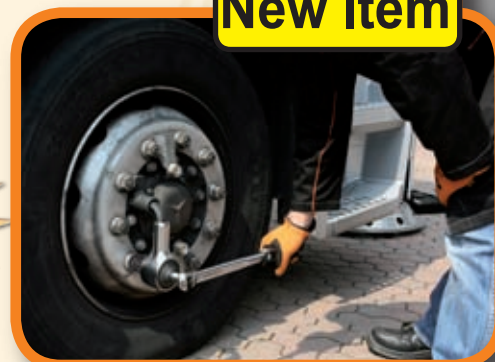

6 kg

Warning:
do not use with electric or pneumatic tools;
use impact sockets.

560/C12

Torque multipliers for right-hand and left-hand tightening in plastic case

Complete with straight reaction lever and reaction foot



☐ 1/2"
☒ 1"

400x260x110 mm

005600210



- Ratio: 12:1
- Max. torque: 2500 Nm



New Item

7 kg

1706DGT

Digital depth gauge for tyre threads

- LCD display
- Mm/inch measurement
- Zero setting function
- Range: 0÷25 mm
- Resolution: 0.01 mm
- Operating temperature: 0÷40 °C
- Battery power supply: 1.55V SR44



New Item

017060011

58 g

1760DGT

Digital multimeter



TECHNICAL DATA
RPM (tachometer): RPM4 600 - 4000 rpm
 RPM4 600 - 12000 rpm (X10 RPM)
 RPM2/DIS 300 - 4000 rpm
 RPM2/DIS 300 - 6000 rpm (X10 RPM)
Dwell angle: 4-8 CYL
DC voltage: 400mV-4/40/400/1000V
AC voltage: 4/40/400/700V
DC current: 40/400mA-4/20A
AC current: 40/400mA-4/20A
Resistance: 400Ω-4/40/400kΩ-4/40MΩ
Capacity: 40/400nF-4/40/100μF
Frequency: 5/50/500Hz-50/500-10MHz
Duty cycle: 0.1 - 99,9%
Pulse amplitude: 1- 10ms
Diode test: Test current 0.3mA typical
Continuity: <1500Ω - Test current <0.3mA
Display: High-contrast, backlit 4-digit LCD
Overvoltage: Category II 1000V
Auto power off: 30 minutes
Power supply: 1 9V battery (included)
Inductive clamp (included)
2 tips (included)
Soft cloth case (included)
Operating manual

017600005

1,1 kg

1760 400A

Amperometric clamp for multimeters



SPECIFICATIONS
Max. current: 400 A
Frequency: 50/60 Hz
Power supply: 1 9V battery (included)

017600080

435 g

720PL/C5

Set of 5 impact sockets for wheel nuts in plastic case

○ 17-19-21-22-24 mm



240x165x50 mm



87 mm

5x

007200650

1,8 kg

12"

720PT/S6

Set of 6 impact torsion bars for wheel nuts



	mm	Nm	D mm	L mm
720PT/5	17	95	25,7	214
720PT/7	17	110	25,7	204
720PT/8	17	120	25,7	200
720PT/15	19	90	28,2	223
720PT/17	19	120	28,2	203
720PT/25	21	100	30,7	214

6x

007200571

1,9 kg

1469D

Digital brake fluid tester
in plastic case

- Allows DOT braking fluids to be tested
- Measures brake fluid boiling point
- Automatic test, with °C/°F scale switching
- Accuracy: $100 \div 180\text{ °C} \pm 3\% - > 180\text{ °C} \pm 5\%$
- Power supply: 12 volts (vehicle battery)



**quick,
accurate
diagnosis**



310x230x100 mm


1,1 kg

014690110

1468/F..

New Item

Rotary brushes
for cleaning rim seats



1x



1x

Max rpm 1000
Ø mm 200

1468/F160 1500 160

014680200

500 g

014680160

528 g



5x



5x

Max rpm 6000
Ø mm 30

1468/F30

014680030

615 g


4x



1277LTX/S4

Set of 4 screwdrivers, long series

Ø T15-T20-T25-T30



012770339

300 g

1471PN/50

New Item

Pneumatic tool for pushing back and rotating right and left disc brake pistons with accessories in plastic case

New 50 mm piston

150 kg thrust

Operating pressure
5÷8 bar

- Automatic jack
- Makes it possible to work on right and left pistons

014710061

350x310x85 mm

3,2 kg



1471M/50

Pneumatic tool for pushing back and rotating right and left disc brake pistons

150 kg thrust

Operating pressure
5÷8 bar

New 50 mm piston

014710069

1,3 kg



New Item

1479/S5

universal

Kit of 5 trim pin removers, stainless steel blades make it possible to quickly and safely remove covering buttons without damaging supports



014790200

850 g

1479N/S5

Kit of 5 nylon trim pin removers Make it possible to quickly and safely remove covering buttons without damaging supports



universal

014790251

375 g

1467E


New Item

**Electronic instrument
for brake fluid
replacement**



**ADJUSTABLE
PRESSURE:
0÷5.8 BAR**

•ABS-ETS-ESP



- Pump, adjustable up to 5.8 bar
- For use on ABS ETS systems
- Fitted with an automatic locking device, triggered in case of brake fluid depletion in filling container
- No use of compressed air
- Power supply: 220/230 V with protection fuse
- Supplied in a case with cap adapters (ø 45 mm, 79 mm + 1 universal)
- Tube length: 3.5 m; cable length: 5.5 m
- Max. capacity: 5 l



014670021

9,5 kg

1497/S-L

New Item

Headlight adjuster

For testing and adjusting vehicle headlights

- With laser or mirror viewer
- Digital luxometer
- Angle setting pin
- Inspection panel with dual photodiode for testing high/low beams
- Triangular base on rubber castors

1497S

version with mirror viewer

014970010

30 kg

1497L

version
with laser viewer

014970020

30 kg




1550/1

Pneumatic compressor for MacPherson and equivalent shock absorber springs, with accessories

Operating pressure 6-8 atm
Air consumption 225 l/min
Maximum force 960 kg
Accessories supplied with compressor:
1 basket
1 vice
3 spring forks 90÷205 mm



3x

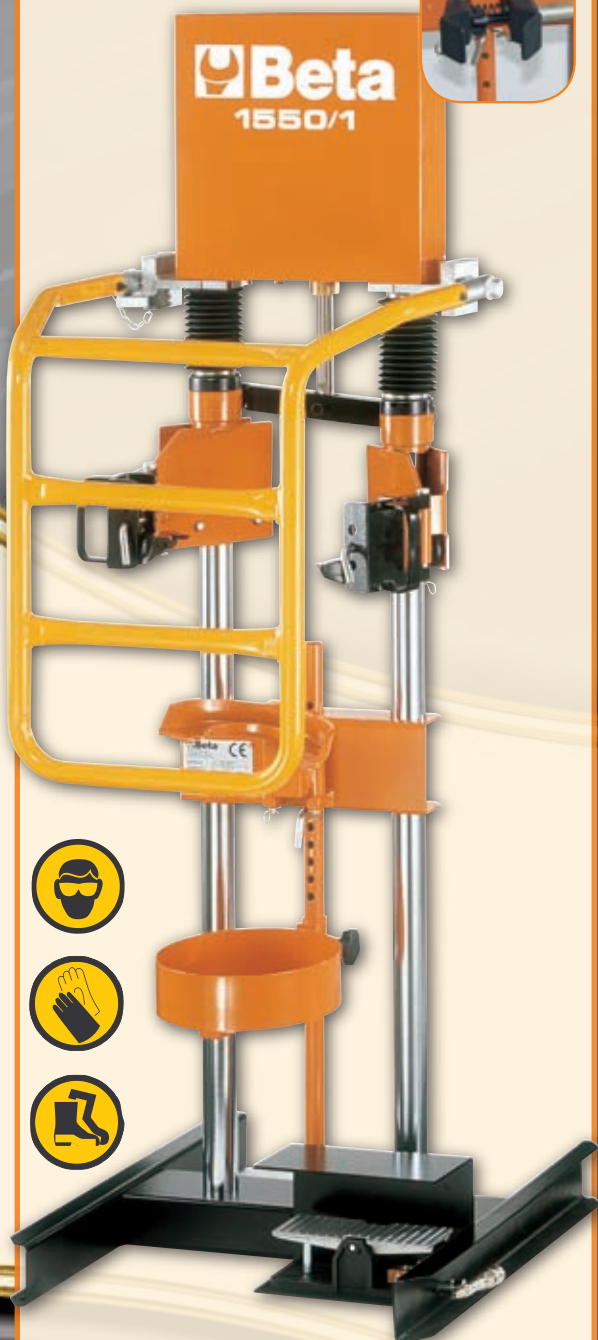

015500001


96 kg

12"

1555/DS

Compressor for MacPherson and equivalent shock absorber springs with two forks and body guards

2500 kg

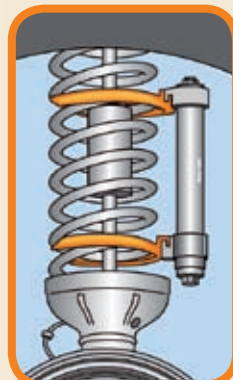

Ø: 80-200 mm

015550000

11 kg

1555/C

12"

Telescopic compressor for shock absorber springs with 4 forks and torsion bar in plastic case

2500 kg



Ø: 90-160 mm

New Item

BMW, Citroën, Chrysler, Chevrolet, Fiat, Alfa Romeo, Lancia, Ford, Honda, Hyundai, Kia, Mazda, Mercedes, Mitsubishi, Peugeot, Renault, Seat, Suzuki, Skoda, Toyota, Volvo, Volkswagen


015550202

5 kg

1489/33P

New Item

Alternator pulley free wheel wrench,
for Bosch FIAT Grande Punto alternators

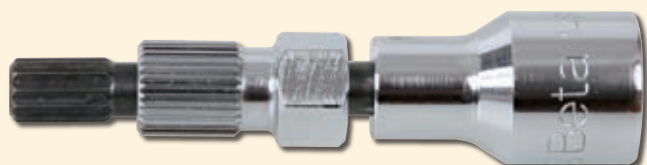

014890015

100 g

1489/Y

New Item

Alternator pulley free wheel wrench,
for Nippondenso alternators
For use with socket drivers 910XZNL,
920XZNL, 920TX/L and 920PEL



014890040

60 g

1498A/12



Car starter, 12 V

Complete with battery charger and cigarette lighter cable

- Pickup current: 2200 A
- Useful recharging cycles: 400
- Sealed lead acid battery, solid electrolyte (AGM) type



014980200

8,5 kg


1498A/24



Car and industrial vehicle starter, 12/24 V

Complete with battery charger and cigarette lighter cable

- Pickup current: 3400(12V) A, 1700(24V) A
- Useful recharging cycles: 500
- Sealed lead acid battery, solid electrolyte (AGM) type

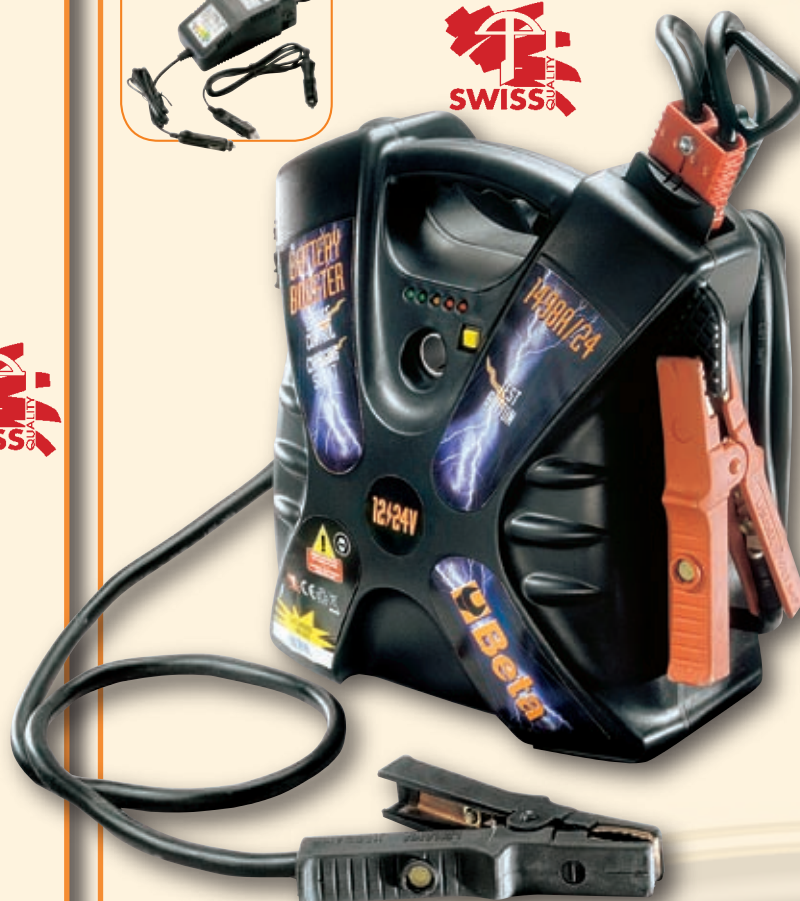

014980210

17 kg

1498TB/W

Wireless digital tester for batteries and recharging systems – start (12-24V) in plastic case

- Tests charging state, capacity and efficiency of battery
- Tests starting system
- Tests recharging system and state of alternator diodes

FITTED WITH:

- Short-circuit protection device
- Temperature compensation system
- Software in 6 languages (I, EN, F, ES, PL, NL)
- Wireless data transmission system with 30-metre range in open field (printer is optional - 1498ST/W)

TECHNICAL DATA

- 12 Volt battery test.
- Standard SAE, EN, IEC, DIN or JIS.
- Capacity: SAE 30-1500; EN 30-1500; IEC 30-1500; DIN 30-1500.
- 12 V and 24 V recharging systems.

SAE, EN,
IEC, DIN, JIS

WIRELESS

New Item



014980071

800 g

960P

universal

Pressure/depressure tester with accessories and adaptors in plastic case

With pressure/depressure reversing valve

It makes it possible to check the following:

- tightness of fuel circuits
- fuel system
- state of pressure sensors
- tightness of servo brake and depressure applications
- cooling circuit

and carry out the following jobs:

- bleeding of motorcycle braking systems

350x320x95 mm



009600777

1,9 kg

960SN/S3

Set of 3 diesel engine glow swivel end wrenches



14" 8 mm

30" 10 - 12 mm



009600853

200 g

1760/TC2

Combination contact/non-contact digital tachometer



TECHNICAL DATA

- For measuring:
 - non-contact rotation speed (rpm)
 - contact rotational (rpm) and linear surface speed (m/min or ft/min).
- 5-digit LCD display.
- Scale:
 - non-contact speed 2.5÷99.999 rpm
 - contact speed 0.5÷19.999 rpm
 - linear surface speed 0.05÷1,999.9 m/min.
- Frequency: 0.8 sec.
- Power supply: 4 1.5V batteries, AA size (included), or 6V power supply (not included)
- Supplied with the following:
 - adaptor for contact tip measurement
 - male (contact) rubber tip (2 pcs.)
 - female (contact) rubber tip (1 pcs.)
 - linear measurement tape (1 pcs.)
 - reflecting tapes
 - instruction manual
 - plastic case.

017600161

660 g

1760/IR800

Digital infrared thermometers with laser aiming system



Dual laser technique

- Distance/spot ratio: 20:1
- Data storage function
- Wide measurement range: -50 °C ÷ 800 °C (-58 °F ÷ 1472 °F)
- Backlit display
- °C/°F selection
- Auto power off
- Power supply: 9V battery (included)

017600380

300 g

FOR REMOTE TEMPERATURE MEASUREMENT

1760/IR1600

Digital infrared thermometers with laser aiming system



- Distance/spot ratio: 50:1
- Data storage function
- Wide measurement range: -50 °C ÷ 1600 °C (-58 °F ÷ 2912 °F)
- Backlit display
- °C/°F selection
- Auto power off
- Power supply: 9V battery (included)

017600460

900 g


1472EQ

New Item

Automatic hose ring pliers with extensions



3 dedicated extensions, to reach tough spots with ease

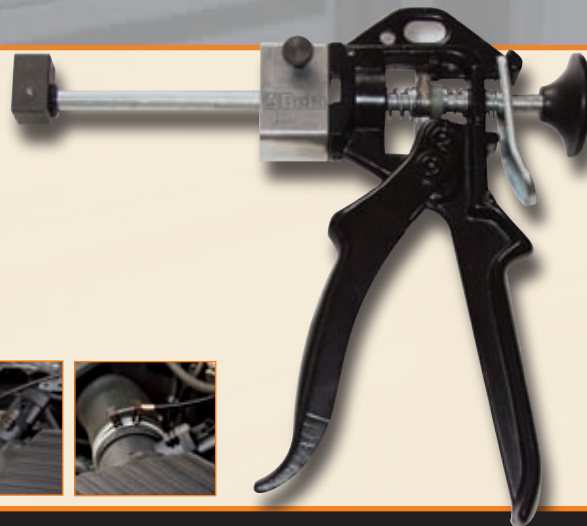

014720069

750 g

1485R

New Item


Universal tool for rotating camshaft pulleys

Made from forged steel with return spring for easier use and 2 pairs of tips (included)



Forged steel

Ø 30 ÷ 120 mm

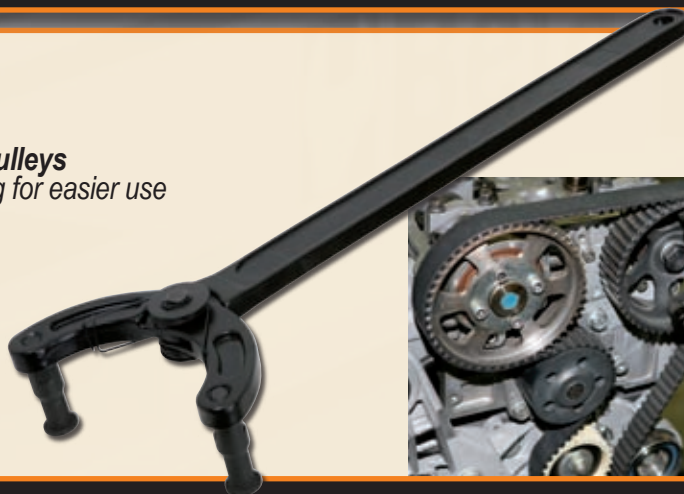

014850025

1 kg

1529

Multi-step cone pulley pulling kit in case

Ø min 24 mm max 240 mm
H 140 mm L 90 mm

260x212x55 mm



Case contents:

- 1 crosspiece, 149 mm
- 1 crosspiece, 230 mm
- 1 thrust axis, 90 mm
- 3 tapered thrust points
- 2 bolts M8X30
- 2 bolts M8X50
- 2 legs, 70 mm
- 2 multi-step clamps, 60 mm
- 2 leg extensions, 22 mm




015290000

2,6 kg

1488L

Oil filter wrench with long double chain
Recommended for removing drying filters

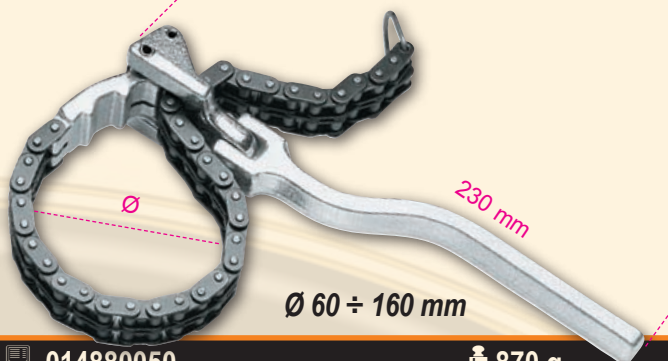

Ø 60 ÷ 160 mm

230 mm

014880050

870 g

1505

Windshield wiper arm remover



015050010

180 g

1765/C24

Assortment of 24 tools for pulling out car radios, in plastic case

soft polyethylene foam base

universal



410x210x60 mm

017650001

1 kg

New Item

1461/C18

Timing devices for Volkswagen, Audi, Skoda 1.4 – 1.6 FSI engines



Engine numbers AXU, BAG, BKG, BLF, BLP, BLN



380x305x40 mm

014610180

1 kg

New Item

1461/C19

Timing devices for Ford Duratorq 2.0-2.2-2.4 DIESEL engines



VOLVO

Engine numbers ABFA, D5BA, D6BA, F3FA, F1FA, FMBA, FMBB, D2FA, D3FA, D4FA, D0FA, F4FA, FXFA, H9FA, HJBA, HJBB, HJBC, HJBE, N7BA, N7BB, QJBA, QJBB, QJBC, SDBA



450x250x45 mm

014610190

2,6 kg

920 FTX/C8

12"

Set of 8 hand sockets for Torx® head screws in metal case

8x



270x120x45 mm

⊙ E10 – E12 – E14 – E16 – E18 – E20 – E22 – E24

009200391

1 kg

920 TX/C9

12"

Set of 9 socket drivers for Torx® head screws in metal case

9x



270x120x45 mm

⊙ T20 – T25 – T27 – T30 – T40 – T45 – T50 – T55 – T60

009200546

1,2 kg

1428/SB11

3/8" 12"

11x

Set of 11 damaged nut removers

3/8" 8-10-11-12-13-14 mm

12" 15-16-17-18-19 mm



014280111

500 g

1429/SB7

3/8" 12"

7x

Set of 7 pullers for damaged screws and stud bolts

3/8" Ø: 2-3-4-5-6 mm

12" Ø: 8-10 mm



014290107

400 g


1568/C13

Soft thermoformed tray

motorbike drive and car timing system

Chain opening and riveting kit complete with pulling and riveting pins in plastic case

Ø 3 – 4 – 5 mm.

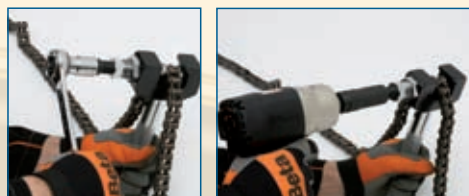

350x170x40 mm



015680061

2,3 kg

2252 O

Seat with castors

sturdy
functional
comfortable



022520001

9,5 kg

3014

Engine stand

foldable



860x400x160 mm

030140010

20 kg

3000M/LT

Crepper



cushion adjusted through
progressive spring piston



030000220

7,3 kg



Capacity: 500 kg
Adjustment: 150 mm
Length: 1500 mm



3012

Engine bracket

030120010

15 kg

3010/T

Steel jack stands, pair,
with chrome-plated finish and safety pin

3010/T2
Capacity kg min-Max mm
2000 280-425

 030100002  5,8 kg

3010/T3
Capacity kg min-Max mm
3000 250-430

 030100003  7,5 kg

3010/T6
Capacity kg min-Max mm
6000 400-580

 030100006  15 kg



3020AL/1


Hydraulic garage jack, made from aluminium




1500
kg



Double
piston



H
max-min
82÷445mm



 030200001

 19 kg

1901P

Shockproof

Automatic hose reel



For compressed air
or cold water

 019010101

 7 kg

1927KP

12" CE

Pneumatic tools

3/4" CE

1928KP

Assortment of 1 reversible impact wrench and 4 impact sockets, long series

in plastic case

- Double hammer impulse device



720L 17-19-21-22 mm



320x275x85 mm



Free speed	8,000 rpm
Max. torque	540 Nm
Working pressure	6.2 bar
Mean air consumption	300 l/min
Internal hose Ø	8 mm
Bolt capacity	8.8 M16 ● 24 mm
Bolt capacity	12.9 M14 ● 21 mm
Impact wrench weight	2,7 kg

019270100

4,5 kg

Assortment of 1 reversible impact wrench and 4 impact sockets, long series

in plastic case

- "Pin Clutch" impulse device



728L 27-30-32-36 mm



380x300x95 mm



Free speed	5,000 rpm
Max. torque	1,360 Nm
Working pressure	6.2 bar
Mean air consumption	380 l/min
Internal hose Ø	10 mm
Bolt capacity CI	8.8 M24 ● 36 mm
Bolt capacity CI	12.9 M22 ● 34 mm
Impact wrench weight	5,1 kg

019280100

7 kg

1927CD

12" CE

Reversible impact wrench, made from composite material

- Lightweight and balanced, for enhanced ease of use
- Max. unscrewing torque: 1,020 Nm
- Double hammer impulse device



Free speed	7,000 rpm
Max. torque	1020 Nm
Operating torque	610 Nm
Air inlet	1/4" GAS
Working pressure	6,2 Bar
Mean air consumption	130 l/min
Internal hose Ø	8 mm
Bolt capacity	CL 8.8 M22 ● 34 mm
Bolt capacity	CL 12.9 M18 ● 27 mm

019270007


1,9 kg

1928CD

3/4" CE

Reversible impact wrench, made from composite material

- Lightweight and balanced, for enhanced ease of use
- Max. unscrewing torque: 1,800 Nm
- Double hammer impulse device

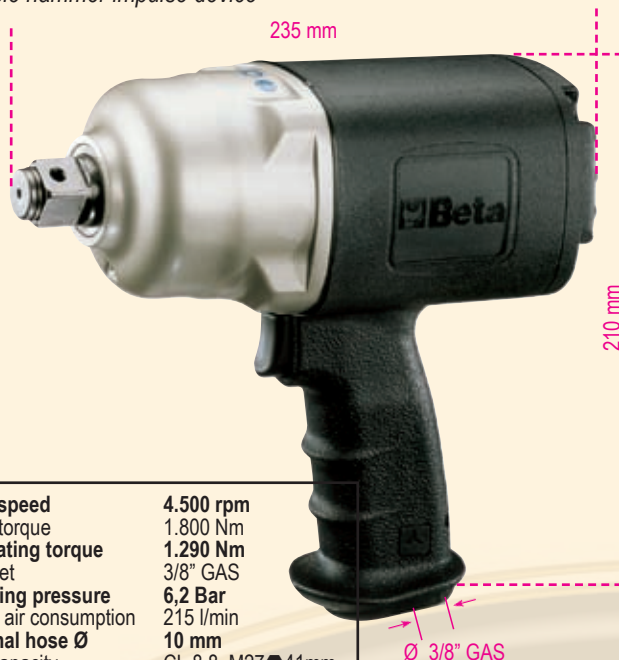

Free speed	4,500 rpm
Max. torque	1.800 Nm
Operating torque	1.290 Nm
Air inlet	3/8" GAS
Working pressure	6,2 Bar
Mean air consumption	215 l/min
Internal hose Ø	10 mm
Bolt capacity	CL 8.8 M27 ● 41 mm
Bolt capacity	CL 12.9 M22 ● 34 mm

019280007

3,5 kg


1922

1/2" CE

Reversible air ratchet

- Lightweight, handy
- Speed regulator

Free speed	160 rpm
Max. torque	67 Nm
Air inlet	1/4" GAS
Working pressure	6.2 bar
Mean air consumption	135 l/min
Internal hose Ø	6 mm
Bolt capacity	CI 8.8 M10 ● 16 mm
Bolt capacity	CI 12.9 M8 ● 13 mm

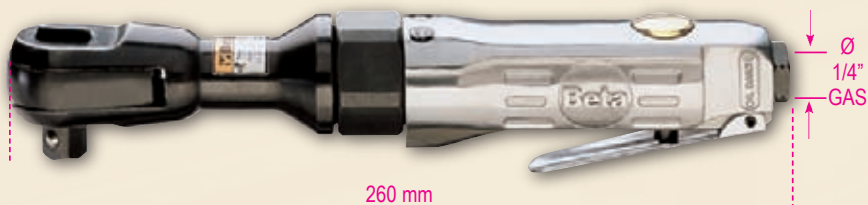

260 mm

1,25 kg

019220001

1932B

ø10 CE

Reversible drill

- Accurate, versatile
- Autochuck
- Air exhaust through handle

Chuck capacity	1÷10 mm
Spindle thread	3/8" - 24UNF
Free speed	1200 rpm
Power	0.44 kW
Air inlet	1/4" GAS
Working pressure	6.2 bar
Mean air consumption	250 l/min
Internal hose Ø	8 mm



Ø 1/4" GAS

1,26 kg


019320005

1930ND

1" CE

Reversible impact wrench

- 8" (192 mm) long anvil reaches screws/nuts without requiring any extension bars, thus minimizing vibration, power loss and operator's fatigue
- Reversible lever; three-level screwing/unscrewing power regulator
- Auxiliary handle allows tool to be held firmly and in a well-balanced position
- Air exhaust in upper rear part of central housing
- Double hammer impulse device

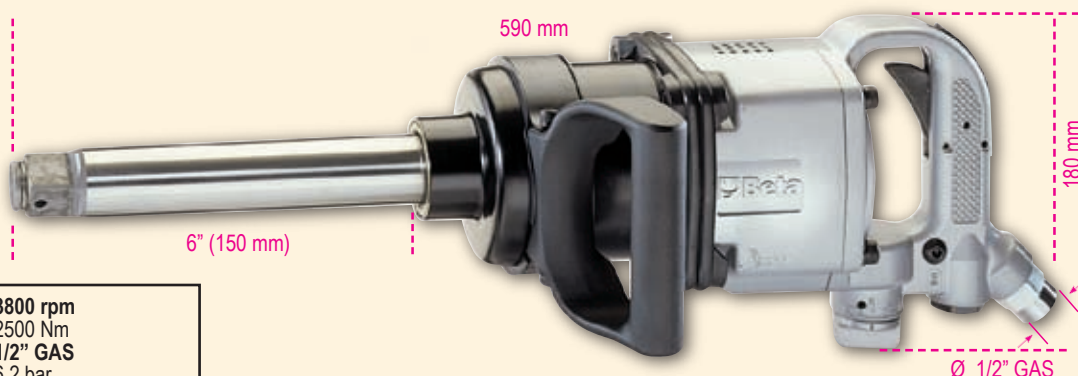

6" (150 mm)

Ø 1/2" GAS

Free speed	3800 rpm
Max. torque	2500 Nm
Air inlet	1/2" GAS
Working pressure	6.2 bar
Mean air consumption	400 l/min
Internal hose Ø	13 mm
Bolt capacity	CI 8.8 M36 ● 55 mm
Bolt capacity	CI 12.9 M30 ● 46 mm

14 kg

019300008

1930PG

1" CE

Reversible impact wrench

- Handy, compact
- Reversible lever; three-level screwing/unscrewing power regulator
- Auxiliary handle allows tool to be held firmly and in a well-balanced position
- Air discharged through handle
- "Rocking Dog" impulse device

Free speed	3500 rpm
Max. torque	2100 Nm
Air inlet	1/2" GAS
Working pressure	6.2 bar
Mean air consumption	420 l/min
Internal hose Ø	13 mm
Bolt capacity	CI 8.8 M33 ● 50mm
Bolt capacity	CI 12.9 M27 ● 41 mm



019300002

11,3 kg

1942S CE

Silenced air saw

- Perceived noise level <85dBa and very low vibration
- Recommended for cutting bodyworks, exhaust pipes and silencers, aluminium, plastic

Strokes per minute	9000
Stroke length	10 mm
Air inlet	1/4" GAS
Working pressure	6.2 bar
Mean air consumption	110 l/min
Internal hose Ø	8 mm



019420002

700 g

1946 CE

Air riveter

- Lightweight, balanced, easy to use
- Supplied with interchangeable nozzles, 2.4-3.2-4.0-4.8 mm long, a safety nail container and a balancing hook

Traction power	8000 N
Stroke length	14 mm
Working pressure	6.2 bar
Air consumption	1.2 l/cycle
Internal hose Ø	6 mm
Maximum rivet capacity	Ø aluminium 4.8 mm



019460001

1,51 kg

Workwear

7953

Work overalls

T/C canvas, 65% polyester,
35% cotton, 270 g/m²

New Item

XS	079530000
S	079530001
M	079530002
L	079530003
XL	079530004
XXL	079530005
XXXL	079530006



7955

Work overalls

T/C canvas,
65% polyester,
35% cotton, 270 g/m²

New Item

XS	079550000
S	079550001
M	079550002
L	079550003
XL	079550004
XXL	079550005
XXXL	079550006

7959

Work jacket

T/C canvas, 65% polyester,
35% cotton, 270 g/m²

New Item

XS	079590000
S	079590001
M	079590002
L	079590003
XL	079590004
XXL	079590005
XXXL	079590006



7950

Work trousers

T/C canvas,
65% polyester,
35% cotton, 270 g/m²

New Item

XS	079500000
S	079500001
M	079500002
L	079500003
XL	079500004
XXL	079500005
XXXL	079500006



7951

Work Bermuda shorts

T/C canvas, 65% polyester,
35% cotton, 270 g/m²

New Item

XS	079510000
S	079510001
M	079510002
L	079510003
XL	079510004
XXL	079510005
XXXL	079510006



7843

Work overalls
T/C twill, 65% polyester,
35% cotton; 200 g/m²

New Item

XS	078430000
S	078430001
M	078430002
L	078430003
XL	078430004
XXL	078430005
XXXL	078430006



7845

Work overalls
T/C twill, 65% polyester,
35% cotton; 200 g/m²

New Item

XS	078450000
S	078450001
M	078450002
L	078450003
XL	078450004
XXL	078450005
XXXL	078450006



7849

Work jacket
T/C twill, 65% polyester,
35% cotton; 200 g/m²

New Item

XS	078490000
S	078490001
M	078490002
L	078490003
XL	078490004
XXL	078490005
XXXL	078490006



7840

Work trousers
T/C twill, 65% polyester,
35% cotton; 200 g/m²

New Item

XS	078400000
S	078400001
M	078400002
L	078400003
XL	078400004
XXL	078400005
XXXL	078400006



7841

Work Bermuda shorts
T/C twill, 65% polyester,
35% cotton; 200 g/m²

New Item

XS	078410000
S	078410001
M	078410002
L	078410003
XL	078410004
XXL	078410005
XXXL	078410006



7900



Work trousers, multipocket style
T/C canvas, 65% polyester,
35% cotton; 270 g/m²

XS	079000100
S	079000101
M	079000102
L	079000103
XL	079000104
XXL	079000105
XXXL	079000106

7901



Work Bermuda shorts, multipocket style
T/C canvas, 65% polyester,
35% cotton; 270 g/m²

XS	079010100
S	079010101
M	079010102
L	079010103
XL	079010104
XXL	079010105
XXXL	079010106

7907



Sleeveless work jacket, multipocket style
T/C canvas,
65% polyester,
35% cotton; 270 g/m²

XS	079070100
S	079070101
M	079070102
L	079070103
XL	079070104
XXL	079070105
XXXL	079070106

7903



Work overalls
T/C canvas, 65% polyester,
35% cotton; 270 g/m²

XS	079030100
S	079030101
M	079030102
L	079030103
XL	079030104
XXL	079030105
XXXL	079030106

7905



Work overalls
T/C canvas,
65% polyester,
35% cotton; 270 g/m²

XS	079050100
S	079050101
M	079050102
L	079050103
XL	079050104
XXL	079050105
XXXL	079050106

7904

New Item

Work jacket, padded and lined
T/C canvas, 65% polyester,
35% cotton, 270 g/m²



XS	079040100
S	079040101
M	079040102
L	079040103
XL	079040104
XXL	079040105
XXXL	079040106

7909

Work jacket
T/C canvas,
65% polyester,
35% cotton,
270 g/m²



XS	079090100
S	079090101
M	079090102
L	079090103
XL	079090104
XXL	079090105
XXXL	079090106

7908

Work overall
T/C canvas, 65% polyester,
35% cotton; 270 g/m²



M	079080102
XL	079080104

7899

Sleeveless technical work jacket
T/C canvas,
65% polyester,
35% cotton,
270 g/m²



M	078990002
XL	078990004

7853

Lightweight work overalls
T/C twill, 65% polyester,
35% cotton; 180 g/m²



XS	078530000
S	078530001
M	078530002
L	078530003
XL	078530004
XXL	078530005
XXXL	078530006

7850

Work trousers, multipocket style
T/C twill, 65% polyester,
35% cotton;
180 g/m²



XS	078500000
S	078500001
M	078500002
L	078500003
XL	078500004
XXL	078500005
XXXL	078500006

7293RK

EN 20345 S3 HRO CE

Greased Nubuck shoe, with torsion control system and durable rubber outsole



New Item



EU	UK	USA	J	Weight (kg)	Weight (lb)
39	6	7	24,5	1180	072930339
40	6,5	7,5	25,5	1226	072930340
41	7	8,5	26,5	1272	072930341
42	8	9	27	1318	072930342
43	9	10	28	1358	072930343
44	10	10,5	28,5	1397	072930344
45	10,5	11,5	29,5	1437	072930345
46	11	12	30	1470	072930346
47	12	13	31	1496	072930347

7294RK

EN 20345 S3 HRO CE

Greased Nubuck ankle shoe, with torsion control system and durable rubber outsole



New Item



EU	UK	USA	J	Weight (kg)	Weight (lb)
39	6	7	24,5	1242	072940339
40	6,5	7,5	25,5	1291	072940340
41	7	8,5	26,5	1339	072940341
42	8	9	27	1388	072940342
43	9	10	28	1430	072940343
44	10	10,5	28,5	1471	072940344
45	10,5	11,5	29,5	1513	072940345
46	11	12	30	1548	072940346
47	12	13	31	1575	072940347


7314AK

EN 20345 S1P CE

"Light" suede shoe, with racing outsole



New Item



EU	UK	USA	J	Weight (kg)	Weight (lb)
36	3,5	4	22,5	765	073140036
37	4,5	5	23	799	073140037
38	5	6	24	832	073140038
39	6	7	24,5	866	073140039
40	6,5	7,5	25,5	900	073140040
41	7	8,5	26,5	934	073140041
42	8	9	27	968	073140042
43	9	10	28	997	073140043
44	10	10,5	28,5	1026	073140044
45	10,5	11,5	29,5	1055	073140045
46	11	12	30	1079	073140046
47	12	13	31	1099	073140047

7315AK

"Light" suede shoe, with racing outsole

EN 20345 S1P

CE

New Item



EU	UK	USA	J		
36	3,5	4	22,5	771	073150036
37	4,5	5	23	805	073150037
38	5	6	24	839	073150038
39	6	7	24,5	874	073150039
40	6,5	7,5	25,5	908	073150040
41	7	8,5	26,5	942	073150041
42	8	9	27	976	073150042
43	9	10	28	1005	073150043
44	10	10,5	28,5	1035	073150044
45	10,5	11,5	29,5	1064	073150045
46	11	12	30	1088	073150046
47	12	13	31	1108	073150047

7316AK

"Light" suede shoe, with racing outsole

EN 20345 S3

CE

New Item




EU	UK	USA	J		
36	3,5	4	22,5	776	073160036
37	4,5	5	23	810	073160037
38	5	6	24	845	073160038
39	6	7	24,5	879	073160039
40	6,5	7,5	25,5	913	073160040
41	7	8,5	26,5	948	073160041
42	8	9	27	982	073160042
43	9	10	28	1011	073160043
44	10	10,5	28,5	1041	073160044
45	10,5	11,5	29,5	1070	073160045
46	11	12	30	1095	073160046
47	12	13	31	1115	073160047

7200NKK

Full-grain leather shoe, highly breathable

EN 20345 S3

CE




EU	UK	USA	J		
35	2,5	3	22	847	072000135
36	3,5	4	22,5	869	072000136
37	4,5	5	23	908	072000137
38	5	6	24	946	072000138
39	6	7	24,5	985	072000139
40	6,5	7,5	25,5	1023	072000140
41	7	8,5	26,5	1062	072000141
42	8	9	27	1100	072000142
43	9	10	28	1133	072000143
44	10	10,5	28,5	1166	072000144
45	10,5	11,5	29,5	1199	072000145
46	11	12	30	1227	072000146
47	12	13	31	1249	072000147
48	13	14	32	1276	072000148

7201NKK

EN 20345 S3 CE

Full-grain leather ankle shoe, highly breathable




EU	UK	USA	J	Icon	Icon
35	2,5	3	22	924	072010135
36	3,5	4	22,5	948	072010136
37	4,5	5	23	990	072010137
38	5	6	24	1032	072010138
39	6	7	24,5	1074	072010139
40	6,5	7,5	25,5	1116	072010140
41	7	8,5	26,5	1158	072010141
42	8	9	27	1200	072010142
43	9	10	28	1236	072010143
44	10	10,5	28,5	1272	072010144
45	10,5	11,5	29,5	1308	072010145
46	11	12	30	1338	072010146
47	12	13	31	1362	072010147
48	13	14	32	1392	072010148

7241CM

EN 20345 S1P CE

Leather shoe, with penetration proof midsole




EU	UK	USA	J	Icon	Icon
38	5	6	24	1101	072410138
39	6	7	24,5	1146	072410139
40	6,5	7,5	25,5	1190	072410140
41	7	8,5	26,5	1235	072410141
42	8	9	27	1280	072410142
43	9	10	28	1318	072410143
44	10	10,5	28,5	1357	072410144
45	10,5	11,5	29,5	1395	072410145
46	11	12	30	1427	072410146
47	12	13	31	1453	072410147
48	13	14	32	1485	072410148

7243CM

EN 20345 S1P CE

Leather ankle shoe, with penetration proof midsole



EU	UK	USA	J	Icon	Icon
38	5	6	24	1152	072430138
39	6	7	24,5	1199	072430139
40	6,5	7,5	25,5	1246	072430140
41	7	8,5	26,5	1293	072430141
42	8	9	27	1340	072430142
43	9	10	28	1380	072430143
44	10	10,5	28,5	1420	072430144
45	10,5	11,5	29,5	1461	072430145
46	11	12	30	1494	072430146
47	12	13	31	1521	072430147
48	13	14	32	1554	072430148



Beta



8 014230 559605

The images are for reference only.
Beta Utensili S.p.A. reserves the right to update
and upgrade its product range without notice.