



SPECIAL 2009 PROMOTION



Promotion valid from
May 20 to November 30, 2009
Prices do not include V.A.T.

1200
kg



New item

Mobile roller cab

7 drawers (588x367 mm)
on ball bearing slides:
5 drawers, 70 mm high
1 drawer, 140 mm high
1 drawer, 210 mm high




Worktop made from
sturdy ABS

**Aluminium
alloy frame:
sturdier, lighter**



Quick, user-friendly drawer
opening system
Aluminium alloy base
and uprights, for enhanced
sturdiness, without affecting
overall weight of product.



- Rear bottle holders made from reinforced sheet metal
- Side bottle holders made from sturdy ABS
- Integrated paper roll holder
- Ergonomic, rubber-coated handle
- Ball bearing slides
- Front centralised lock

4 castors, Ø 125 mm
2 fixed and 2 steering (one with brake)




Gift

C39/PU

Tool panel for item C39

New item

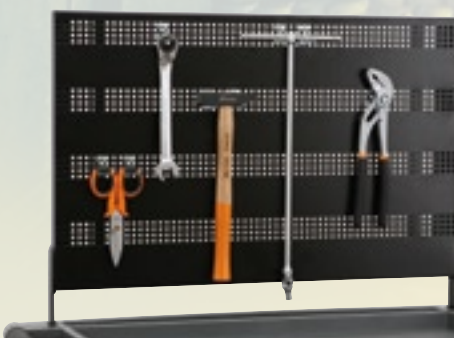


3.2 kg

039000529

C39/PM

Small tool panel for item C39

New item

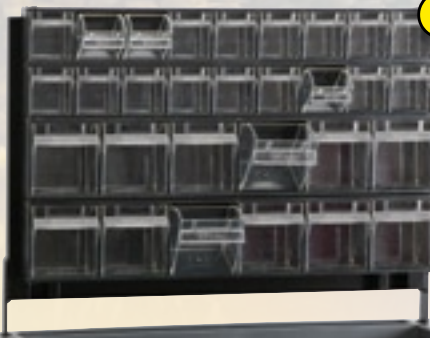

6 kg

039000530

59 kg

039000017

C51

Trolley

- 3 tops covered in antislip ribbed rubber
- Ergonomic handle
- Two fixing options for central worktop

New item

Four castors Ø 100 mm:
2 fixed and 2 steering (1 with brake)

21 kg

051000001

240 kg



900 mm
450 mm
800 mm

C9

Fabric tool bag

- Hard base
- Functional interior and exterior tool pockets
- Exterior pocket with zip closure for enhanced safety
- Pocket with Velcro closure for personal belongings
 - Double bottom
 - Double string for levels
- Shoulder strap for easier transport

New item

550x280x320 mm


2,6 kg

021090000

C9/70°

Tool bag C9 with assortment of 41 tools

Beta n°	description	quantity
30	drift punches, Ø 2-3 mm	2
32	centre punch, Ø 4 mm	1
34	flat chisels, 125-150 mm	2
36	cape chisel, 150 mm	1
55	double open end wrenches, 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22 mm	8
96/SP9	offset hexagon key wrenches, 1,5-2-2,5-3-4-5-6-8-10 mm	9
1048	slip joint pliers, boxed joints, 240 mm	1
1082	diagonal cutting nippers, 160 mm	1
1128BMX	electrician's scissors	1
1150	combination pliers, 180 mm	1
1201	screwdrivers for slotted head screws, 2,5x50-3x75-4x100-5,5x100-6,5x150 mm	5
1202	screwdrivers for cross head Phillips® screws, PH0x60-PH1x80-PH2x100 mm	3
1370	engineer's hammer, 300 g	1
1390	soft face hammer	1
1691A/5	measuring tape, 5 m	1
1725CR	mini hacksaw frame	1
1755	plastic oil can, 30 cc	1
1771	utility knife	1



7,6 kg

021090070

42/SC9I

Set of 9 combination wrenches

with compact support

8-10-11-12-13-14-15-17-19 mm



9x

• compact, practical, easy-to-carry support

• quickly identified wrench size

• wrench safely locked in support



890 g

000420087

142/SC9I

Set of 9 reversible ratcheting combination wrenches

with compact support

8-10-11-12-13-14-15-17-19 mm



9x

950 g

001420087

195FTX/B4

Set of 4 ratcheting double-ended straight bi-hex wrenches for Torx® head screws, in nylon bag

E6xE8 - E10xE12 - E14xE18 - E20xE24

take-up angle: 5°

4x



560 g

001950501

192/S2

Set of 2 reversible ratcheting bi-hex wrenches

8x10/12x13-16x17/18x19 mm

New item

2x



8 sizes in 2 wrenches

take-up angle: 5°

400 g

001920070

920A/C12X

Assortment of 12 hexagon sockets and 5 accessories
in metal case

1/2"



900/C13-5

Assortment of 13 hexagon sockets and 5 accessories
in metal case

1/4"



4,2 kg

009200933

1 kg

009000950

2001/B6

Assortment of 4 screwdrivers, combination pliers (1 pcs.), 1 adjustable wrench with scale
in pouch

New item



1 kg

020010100

1047

Push-button slip joint pliers

- Quick, accurate adjustment through push-button lock
- No slipping
- Heat-treated jaws
- Length: 240 mm

New item



31BM/D6

Set of 6 pin punches with handles

- Shock absorption
- Safe handle
- Hand protection



Ø 2-3-4-5-6-8 mm



A firm tool for powerful, accurate impact

6x

New item



900 g

000310420

446/C41

Assortment of 36 chrome-steel taps and dies and 5 accessories

in wooden case



M	M	N°0	N°1	Ø 25,4	Ø 38,1
mm	mm	N°2			
3x0,5	3x0,5				
4x0,7	4x0,7				
5x0,8	5x0,8				
6x1	6x1				
7x1	7x1				
8x1	8x1				
8x1,25	8x1,25				
10x1,25	10x1,25				
10x1,5	10x1,5				
12x1,25	12x1,25				
12x1,5	12x1,5				
12x1,75	12x1,75				



535x240x45 mm

3,7 kg

004460058

1/2"

Reversible ratchet
For right-hand and left-hand tightening

Electronic torque wrench
with reversible ratchet

UNI EN 26789 ISO 6789

Measuring range: 40÷200 Nm
Male square drive: 1/2"
Accuracy: +/- 2% clockwise
+/- 3% anticlockwise

New item

Engineering units:
Nm, ft.lb, in.lb, kgcm

Green LED indicators will turn on when 90% of target torque has been reached (warning signal)

Buzzer

Arrow buttons:
torque selection

Red LED indicators will turn on when set torque has been reached (stop signal)

U/S button:
Unit/Setting button

**SIMPLE,
FUNCTIONAL**

Modes:
Peak/Track

C button:
Power on/Resetting

LCD display
User-friendly symbols and easy-to-read measuring data

Dual approaching and stopping signal
Green LEDs and, later, red LEDs combined with a buzzer inform user that target torque has been reached

Easy to set
Push buttons for quick, user-friendly wrench setup

Antislip handle
Bi-material handle for enhanced operating comfort

Power supply
2 AA 1.5V batteries, included

1.5 kg


005990020

601

Electronic torque angle protractor

in plastic case

- For tightening screws at preset values through measurement of torsion angle
- Can be used with torque wrenches, ratchets or 1/2" male square drives
- Does not need any fixed reference point to anchor to
- Fitted with a buzzer and LED indicators to inform user that set angle has been approached and reached.




**PENDING
PATENT**



Features:

- Direct angle readout (ANGLE)
- Target angle setting (SET)
- Maximum angle (MAX)

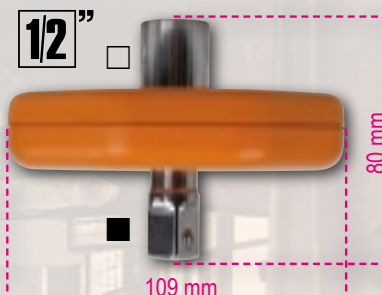

New item



Gift



-999° / + 999°

SPECIFICATIONS

1/2" male square drive

Measuring range

-999°/+999°

Accuracy

± 1%

Readout

clockwise/anticlockwise

Power supply

3 AAA batteries (1.5 V x 3), included

Resolution

0,1°

Display

32 digits –LCD type – backlit



220x210x100 mm

1 kg

006010001

1498CB/30-80-120

New item

1498CB/30

Electronic motorcycle battery charger



1-40 Ah 6/12 Volt



IP65


400 g 014980303

1498CB/80

Electronic car/motorcycle battery charger



1-110 Ah 12 Volt



IP65


600 g 014980308

1498CB/120

Electronic car/commercial vehicle battery charger




4-190 Ah 12 Volt



IP41

850 g 014980312

- Suitable for all types of batteries: Wet, Mf, Dry, Agm, Gel
 - Charging and holding function
 - Monitor batteries and keep them charged during idle periods
- Charging cycle testing and performance managed by a microprocessor in three distinct phases, in accordance with DIN 41772:
- 1 First charging phase "I", constant current, until maximum battery voltage is reached
 - 2 Second charging phase "U₀", stabilized voltage, until current decreases and reaches low values
 - 3 Third charging phase "U", low constant voltage, and holding current

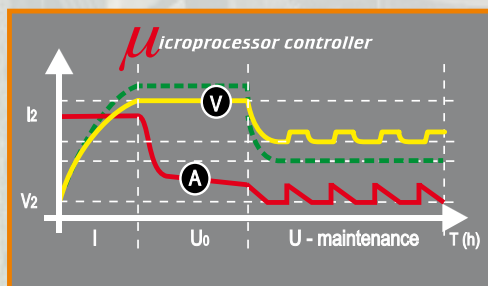

- Protection against polarity reversal with LED indicator and buzzer
- Battery and voltage failure protection
- Degrees of protection: IP 65 (1498/30-1498/80) and IP 41 (1498/120)

STANDARD ACCESSORIES



SPECIFICATIONS

MODEL	POWER SUPPLY (Volts)	POWER (Watts)	VOLTAGE (Volts)	CHARGING CURRENT (Amp)	RATED REFERENCE CAPACITY (Ah)	DIMENSIONS (mm)
1498/30	230	20	6/12	1	1-40	150x65x36
1498/80	230	60	12	3,5	1-110	188x82x45
1498/120	230	110	12	6,5-1	4-190	220x98x55

960TP

Digital pressure tester

With wireless module for Beta 1498 ST/W printer

It makes it possible to perform the following tests:

- petrol compression test
- diesel compression test
- oil pressure test
- low side common rail test
- petrol injection pressure test

Specifications

- bar: 0-80
- Resolution: 0.1 bar
- Maximum pressure storage
- Backlit LCD display
- Software in 6 languages (I, EN, F, ES, PL, NL)
- Environmental pressure correction
- Sensor accuracy: +/- 1%
- Sensor can be removed and replaced
- Wireless module for transmitting data to Beta 1498 ST/W printer

WIRELESS

New item

SENSOR 80 bar

280x240x77 mm

800 g

009600300

960AD/TP

Set of 39 adaptors for item 960 TP

In plastic case

450x315x56 mm

Contents:

- Dummy injectors – Dummy glow plugs
- Spark plug adaptors M10-M12-M14-M18
- Oil cap adaptors
- Petrol injection connectors
- Set of spare gaskets

Upon request, adaptor sets are available for petrol compression, diesel compression, low pressure fuel line and oil pressure

New item

1.5 kg

009600310

1498ST/W

Wireless printer

It allows any tests performed with Beta items 1498 TB/W and 960 TP to be printed

WIRELESS

TECHNICAL DATA

- Data reception range: as far as 30 metres in open field
- Thermal printing
- Resolution: 203 dpi
- Printing speed (mm/sec): 60
- Paper width: 58 mm

New item



ONE PRINTER FOR SEVERAL PRODUCTS

700 g

014980500

1498TB/W

Wireless digital tester for batteries and recharging/starting systems

In plastic case

- Tests charging state, capacity and efficiency of battery
- Tests starting system
- Tests recharging system and state of alternator diodes

WIRELESS

FITTED WITH:

- Short-circuit protection device
- Temperature compensation system
- Software in 6 languages (I, EN, F, ES, PL, NL)
- Wireless module for transmitting data to Beta 1498 ST/W printer

TECHNICAL DATA

- 12 Volt battery test.
- Standard SAE, EN, IEC, DIN or JIS.
- Capacity: SAE 30-1500; EN 30-1500; IEC 30-1500; DIN 30-1500.
- 12 V and 24 V recharging systems.



800 g

014980071

720LPL/C3

Set of 3 impact sockets, long series, for wheel nuts, with polymeric material insets
in plastic case

- Do not damage new alloy rim models
- Sizes: 17 - 19 - 21 mm
- Long version, 150 mm
- Supplied with 3 spare insets

New item

150 mm

3x

270x185x60 mm

1 kg

007200750

1428L/B3

Set of 3 damaged nut removers, long series
in wallet

17-19-21 mm

1 1/2"

New item

3x

120 mm

800 g

014280303

1479/S5

Set of 5 nylon trim pin removers, stainless steel blades
in hard thermoformed tray

300x260x40 mm

850 g

014790200

3010/T

**Steel jack stands, pairs,
with chrome-plated finish
and safety pin**

3010/T2

Capacity kg min-Max mm
2000 280-425



030100002 5,8 kg

3010/T3

Capacity kg min-Max mm
3000 250-430



030100003 7,5 kg

3010/T6

Capacity kg min-Max mm
6000 400-580




030100006 15 kg

3010/T10

Capacity kg min-Max mm
10000 471-735



030100010 28 kg

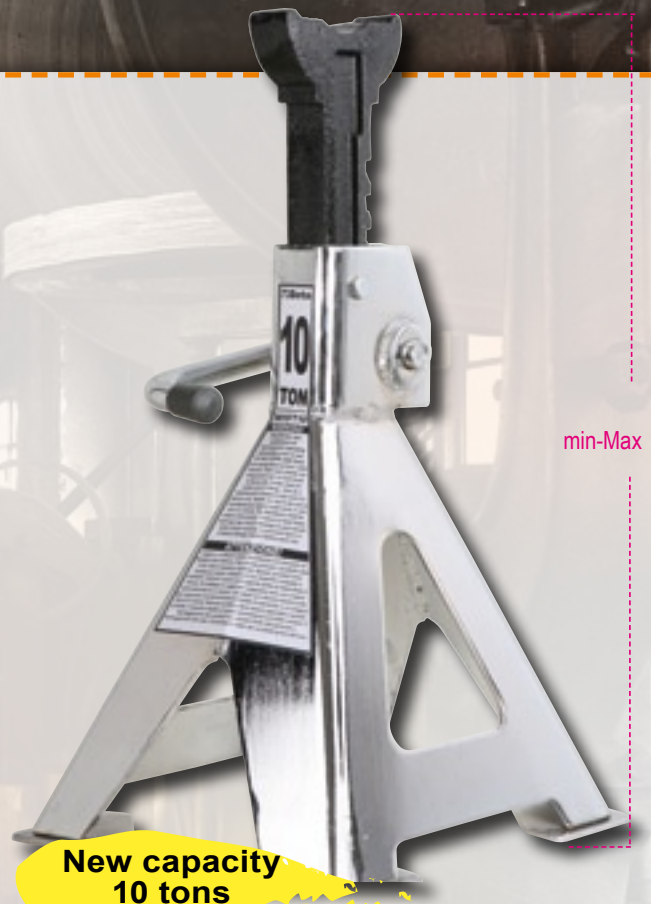

3011

Hydraulic bottle jacks

New item

3011/T3,5

Capacity kg min-Max mm L mm
3500 170-366 86



030110035 3,5 kg

3011/T5

Capacity kg min-Max mm L mm
5000 203-467 118



030110050 4,5 kg

3011/T10

Capacity kg min-Max mm L mm
10000 220-484 114



030110100 7 kg

3011/T15

Capacity kg min-Max mm L mm
15000 230-497 230-497




030110150 9 kg



9700T



Impact sockets for locking BPW hub nuts

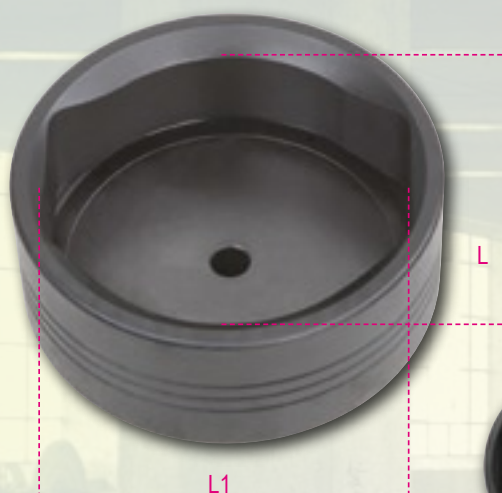

New item



Heavy-duty hexagon



9700T 65 L=65 mm L1=61 mm **34"**

009700165 1,2 kg

9700T 80 L=80 mm L1=73 mm **34"**

009700180 1,5 kg

9700T 96 L=96 mm L1=90 mm **34"**

009700196 2 kg

9700T 111 L=111 mm L1=104 mm =41 mm

009700211 2,75 kg

1557V



Impact sockets for Volvo leaf springs



27 mm

VOLVO

New item


500 g

015570299



970C

Octagonal impact sockets for locking hub nuts



New item

Heavy-duty hexagon

970C 80 =80 mm =41 mm

009700808 1,8 kg

970C 95 =95 mm **34"**

009700815 2 kg

970C 100 =100 mm **34"**

009700820 2,2 kg

970C 109 =109 mm =41 mm

009700829 2,4 kg

970C 115 =115 mm **34"**

009700835 2,8 kg

970C 120 =120 mm =41 mm


009700840 2,9 kg

1557



Impact sockets for leaf springs

3/4"

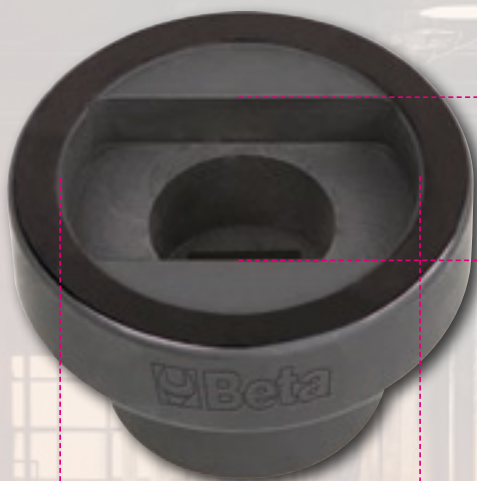

L1

L

New item

1557 37 L=37 mm L1=28 mm

015570137 420 g

1557 46 L=46 mm L1=34 mm

015570146 620 g

1557 56 L=56 mm L1=34 mm

015570156 770 g

1559V/8T



Hydraulic screw for ball joint puller, heavy vehicles

Max. thrust 8 t

M14 x 1,5

150 mm

UN 1 1/2" x 16

New item

1,5 kg

015590145

1562



Ball joint puller for heavy vehicles

◆ 27 mm

New item

Max. thrust 8 t

50 mm

Ø 39 mm

2,5 kg

015620039


1559/45



Ball joint puller for heavy vehicles

New item

Max. thrust 15 t

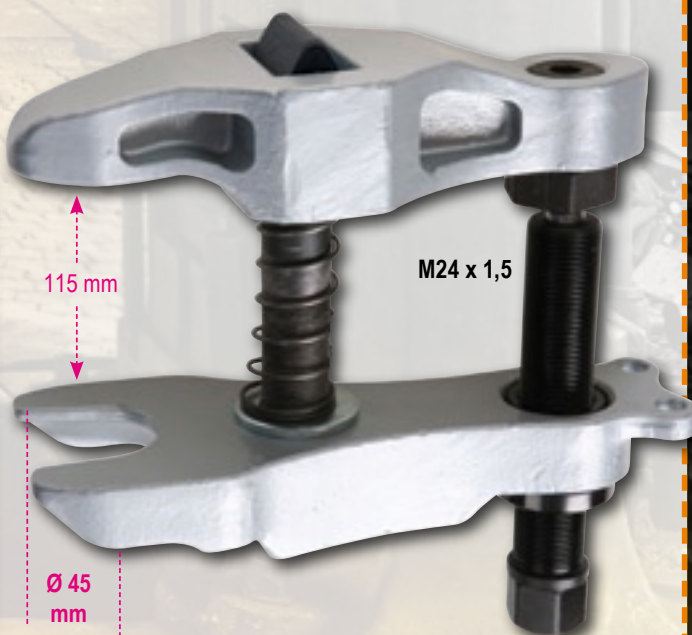

115 mm

M24 x 1,5

Ø 45 mm

Optional 1559V/8T
8 t hydraulic screw

2,5 kg

015590045


1834**New item**

8 014230 574929

998023540

New ultra-high luminosity LED torches

Made of sturdy anodized aluminium, they are fitted with high-efficiency LEDs which result in reduced consumption with extremely intense luminous flux.
All the models are provided with dust and water proof gaskets.
These LEDs have a life span of up to 50,000 operating hours

1834/70

2 AA batteries (not included)

52 g

018340010

1834/150

3 AAA batteries (not included)

120 g

018340020

1834/200

3 D batteries (not included)

390 g

018340030

1838**Rechargeable lithium-ion LED lamp**

Water and oil resistant.
Hangable, sturdy, antislip rubber body
Front low-battery LED
30 high-brightness 100,000-hour LEDs

Lithium polymer battery:
no memory effect
lightweight, long operating time
(over 8 hours)



600 g

018380001



Beta Utensili S.p.A.

Via Volta, 18

20050 Sovico (MI)

Tel. 039.2077.1

Fax 039.2010742

www.beta-tools.cominfo@beta-tools.com

The pictures have been included purely as an indication.

Beta reserves the right to make updates and improvements to its product range without notice.

70th ANNIVERSARY