

# SÜSPANSİYON KÖRÜKLERİ AIR SPRINGS



Süspansiyon Körukleri Grubu / Air Springs Group

SEM NO. **72.0081.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES  
Discos

**REF. NO**  
Contitech


Firestone 1T 17 B-11

Dunlop D13B42

Phoenix

Goodyear 1R13-150

CF Gomma

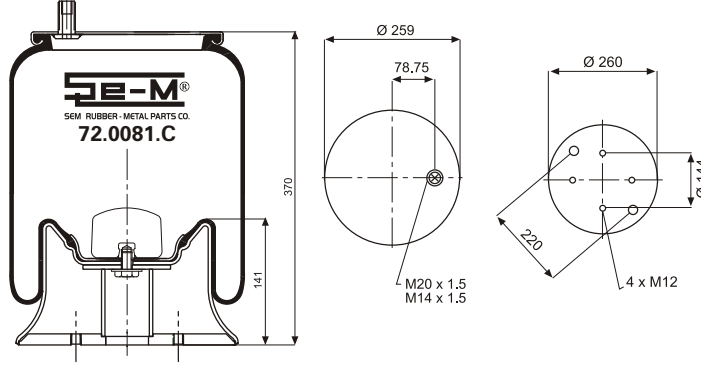

**TECHNICAL SPECIFICATION**

Total Weight : 13.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 400 mm.

Assembly Height : 340 mm.

Loading Capacity : 2450 kg.

SEM NO. **72.1885.R1**

Roll / Rolling Lobe Air Spring

**MODEL**

MAN  
IVECO

**REF. NO**  
Contitech

1885 N1


Firestone 1R2A445 280

Dunlop D12S07

Phoenix 1 F 20 B

Goodyear 9003

CF Gomma 1SC 270-28

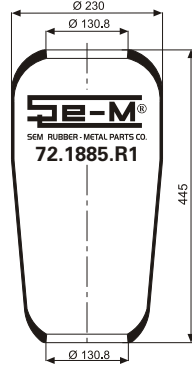

**TECHNICAL SPECIFICATION**

Total Weight : 1.90 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 2000 kg.

SEM NO. **72.4004.C03**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

**REF. NO**  
Contitech

4004 NP03


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

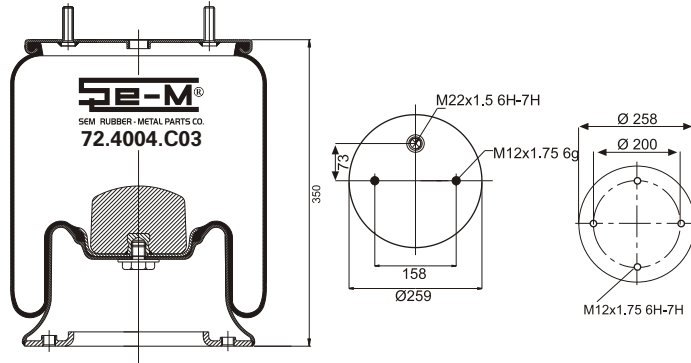

**TECHNICAL SPECIFICATION**

Total Weight : 9.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 350 mm.

Loading Capacity : 2250 kg.

SEM NO. **72.4004.CP03**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SAF

**REF. NO**  
Contitech

4004 NP03


Firestone 1T 17BS-6

Dunlop D12 B13

Phoenix 1DK 22 E-8

Goodyear 1R11-713

CF Gomma 1T323-33

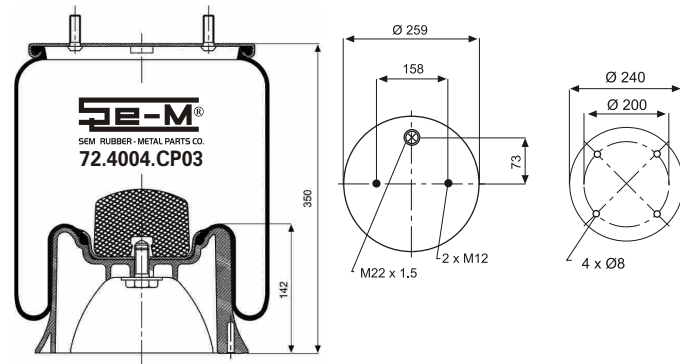

**TECHNICAL SPECIFICATION**

Total Weight : 6.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 350 mm.

Loading Capacity : 2250 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4004.S02**


Metalli Pistonsuz / Service Assembly

**MODEL**

SAF

**REF. NO**

Contitech	4004 NP02
Firestone	1T 17BS-6
Dunlop	D12 U13
Phoenix	1 DK 22 E-5 NP
Goodyear	1R11-705
CF Gomma	1T 19 E-5

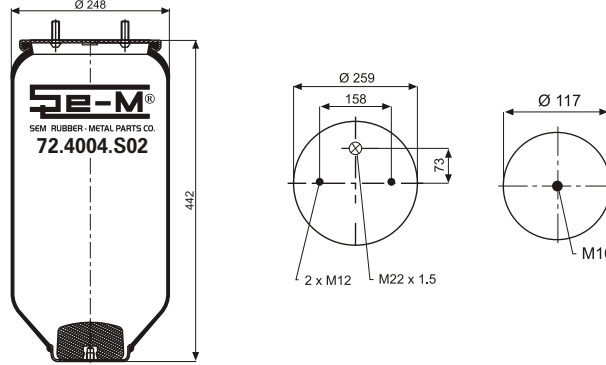

**TECHNICAL SPECIFICATION**

Total Weight	: 5.20 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 2250 kg.

SEM NO. **72.4022.C02**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

**REF. NO**

Contitech	4022 NP02
Firestone	1T 17BS-6
Dunlop	D12 B14
Phoenix	1 DK 22 E-9
Goodyear	1R11-714
CF Gomma	1T 300-37

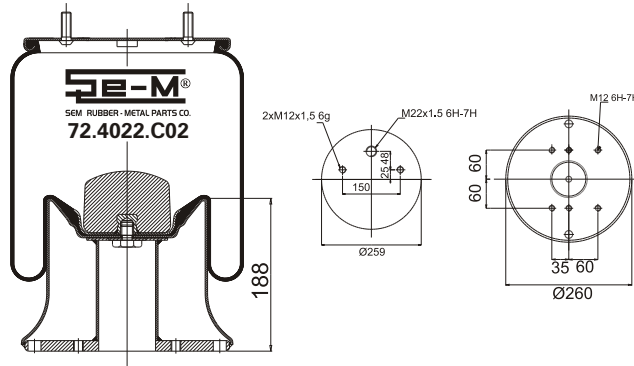

**TECHNICAL SPECIFICATION**

Total Weight	: 9.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 2250 kg.

SEM NO. **72.4022.C03**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

**REF. NO**

Contitech	4022 NP03
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

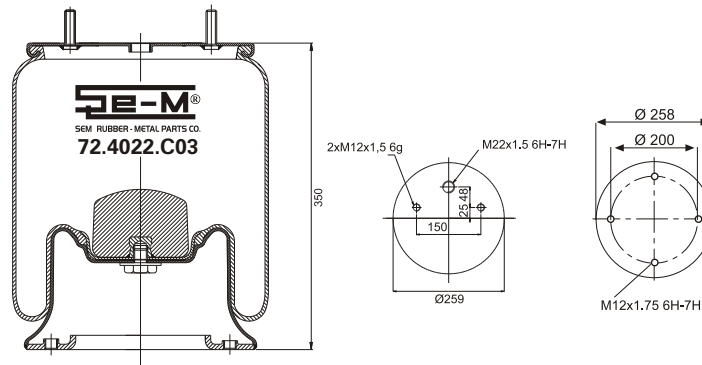

**TECHNICAL SPECIFICATION**

Total Weight	: 9.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 2250 kg.

SEM NO. **72.4022.CP02**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SAF

**REF. NO**

Contitech	4022 N2
Firestone	1T 17BS-6
Dunlop	D12 B14
Phoenix	1 DK 22 E-9
Goodyear	1R11-714
CF Gomma	1T 300-37

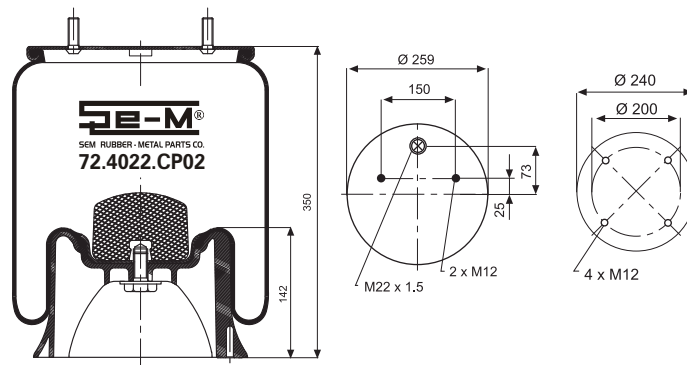

**TECHNICAL SPECIFICATION**

Total Weight	: 6.90 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 2250 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4022.CP03**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SAF

**REF. NO**

Contitech 4022 NP03


Firestone 1T17BS-6

Dunlop D12B14

Phoenix 1 DK 22 E-9

Goodyear 1R11-714

CF Gomma 1T 300-37

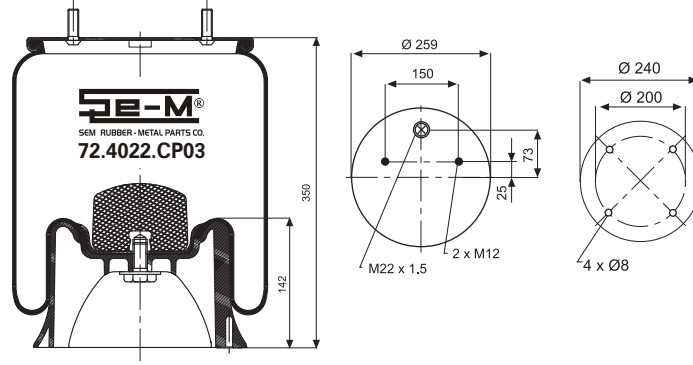

**TECHNICAL SPECIFICATION**

Total Weight : 6.90 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 350 mm.

Loading Capacity : 2250 kg.

SEM NO. **72.4022.CP05**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SAF

**REF. NO**

Contitech 4022 NP05


Firestone 1T 17BS-6

Dunlop D11 B41

Phoenix 1 DK 22 E-11

Goodyear 1R11-781

CF Gomma

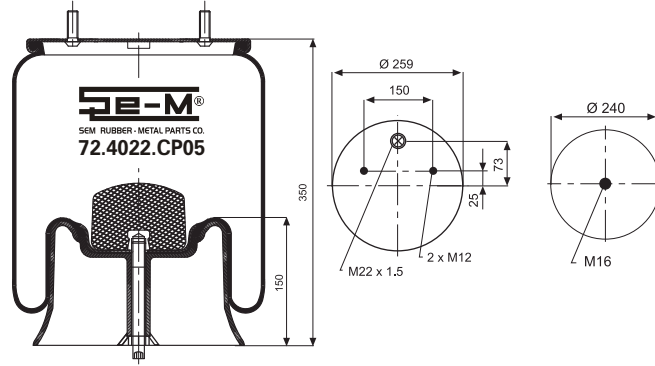

**TECHNICAL SPECIFICATION**

Total Weight : 6.90 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 350 mm.

Loading Capacity : 2250 kg.

SEM NO. **72.4022.S02**

Metalli Pistonsuz / Service Assembly

**MODEL**

SAF

**REF. NO**

Contitech 4022 NP02


Firestone 1T 17BS-6

Dunlop D11 U40

Phoenix 1 DK 22 E-9 NP

Goodyear 1R11-709

CF Gomma

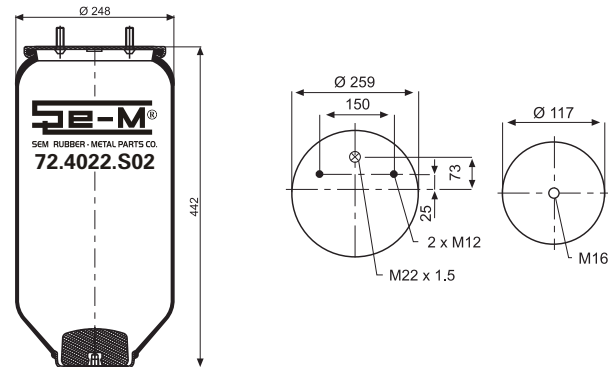

**TECHNICAL SPECIFICATION**

Total Weight : 4.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 350 mm.

Loading Capacity : 2250 kg.

SEM NO. **72.40301.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

**REF. NO**

Contitech


Firestone 1T15VR-3 W01S158192

Dunlop

Phoenix

Goodyear

CF Gomma

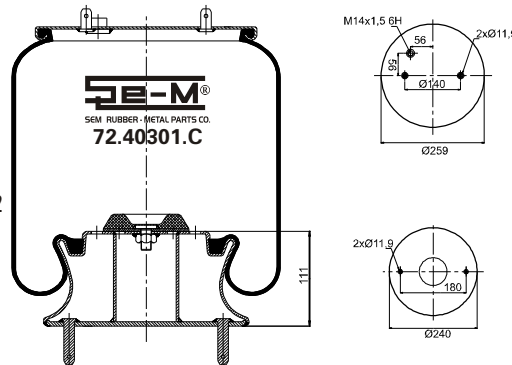

**TECHNICAL SPECIFICATION**

Total Weight : 7.5 kg.

Operation Pressure : 5.0 Bar

Operation Space : 315 mm.

Assembly Height : 300 mm.

Loading Capacity : 3500 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. 72.40302.C

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

**REF. NO**

Contitech


Firestone 1T15VFR-3 W01M5858192

Dunlop

Phoenix

Goodyear

CF Gomma

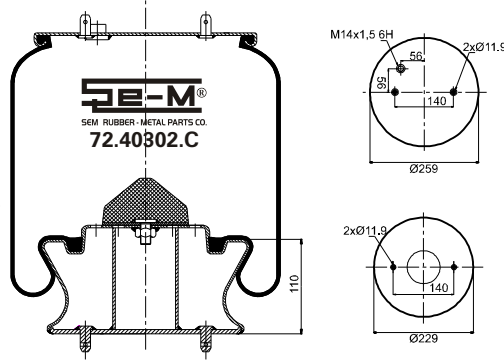

**TECHNICAL SPECIFICATION**

Total Weight : 7.5 kg.

Operation Pressure : 5.0 bar

Operation Space : 315 mm.

Assembly Height : 300 mm.

Loading Capacity : 4000 kg.

SEM NO. 72.40303.C

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SCANIA

**REF. NO**

Contitech


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

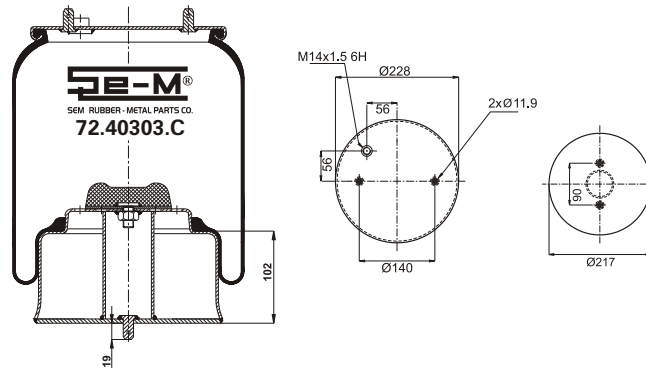

**TECHNICAL SPECIFICATION**

Total Weight : 7.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 260 mm.

Assembly Height : 270 mm.

Loading Capacity : 2100 kg.

SEM NO. 72.40304.C

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SCANIA

**REF. NO**

Contitech


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

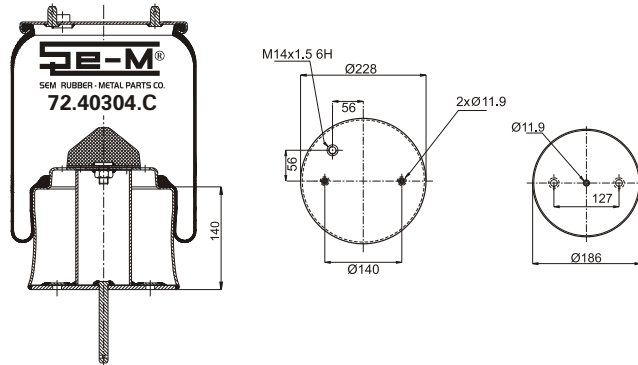

**TECHNICAL SPECIFICATION**

Total Weight : 8.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 270 mm.

Assembly Height : 280 mm.

Loading Capacity : 1900 kg.

SEM NO. 72.40305.C

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SCANIA

**REF. NO**

Contitech


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

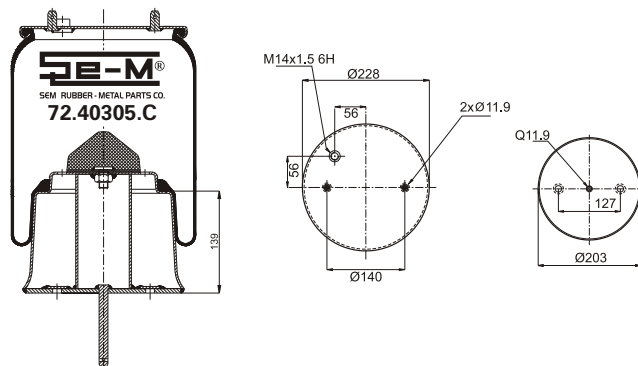

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 270 mm.

Assembly Height : 280 mm.

Loading Capacity : 2000 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.40306.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SCANIA

**REF. NO**

Contitech


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

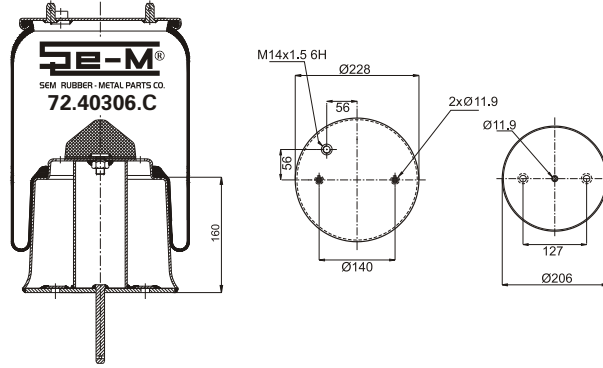

**TECHNICAL SPECIFICATION**

Total Weight : 8.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 265 mm.

Assembly Height : 275 mm.

Loading Capacity : 2050 kg.

SEM NO. **72.40307.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

**REF. NO**

Contitech 1440307


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

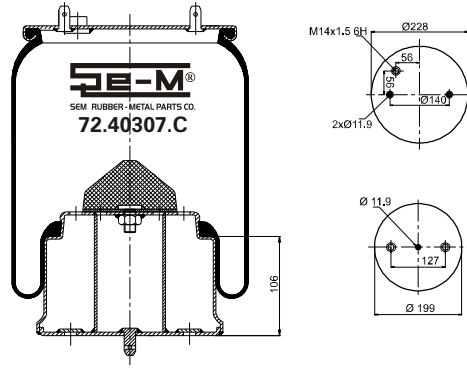

**TECHNICAL SPECIFICATION**

Total Weight : 8.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 270 mm.

Assembly Height : 290 mm.

Loading Capacity : 2600 kg.

SEM NO. **72.4156.C04**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

GRANNIG

NEWAY

ROR

**REF. NO**

Contitech 4156 NP04


Firestone 1T 15M-6

Dunlop D12 B33

Phoenix

Goodyear 1R12-716

CF Gomma 1T 323-33

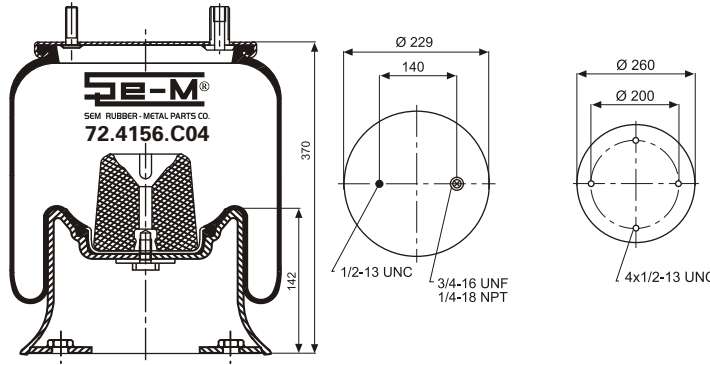

**TECHNICAL SPECIFICATION**

Total Weight : 9.0 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 370 mm.

Loading Capacity : 2400 kg.

SEM NO. **72.4156.C06**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF

ROR

**REF. NO**

Contitech 4156 NP06


Firestone 1T 15M-6

Dunlop D12B19

Phoenix 1 DK-21A-2

Goodyear 1R12-719

CF Gomma 1T323-33

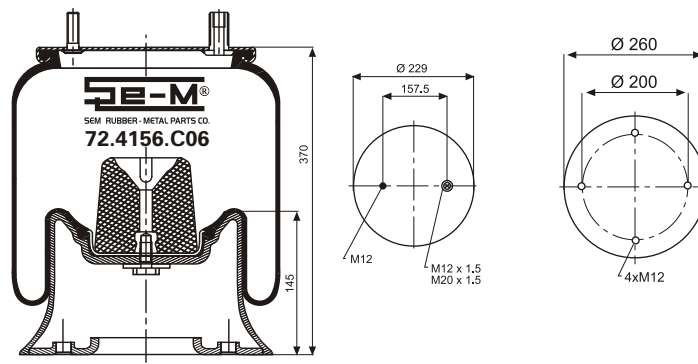

**TECHNICAL SPECIFICATION**

Total Weight : 8.10 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 370 mm.

Loading Capacity : 2400 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4156.C07**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SMB  
FRUEHAUF

**REF. NO**

Contitech 4156 NP07


Firestone

Dunlop

Phoenix 1DK 23 K-28

Goodyear

CF Gomma

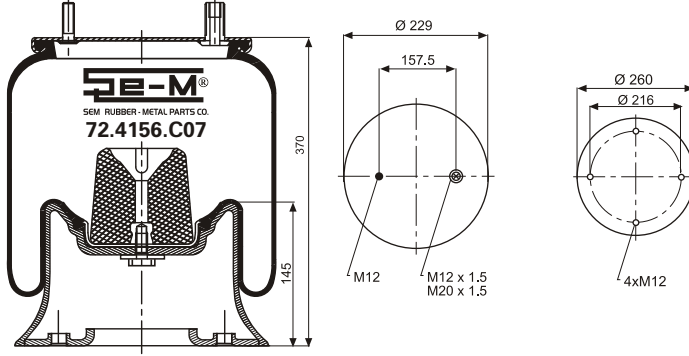

**TECHNICAL SPECIFICATION**

Total Weight : 8.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 370 mm.

Loading Capacity : 2400 kg.

SEM NO. **72.4156.C09**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF  
ROR

**REF. NO**

Contitech 4156 NP09


Firestone 1T 15M-6

Dunlop D12 B16

Phoenix

Goodyear 1R12-706

CF Gomma

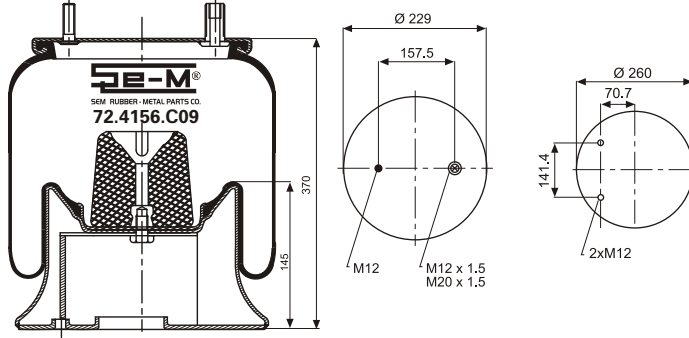

**TECHNICAL SPECIFICATION**

Total Weight : 10.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 370 mm.

Loading Capacity : 2400 kg.

SEM NO. **72.4156.C11**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

**REF. NO**

Contitech 4156NP11


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

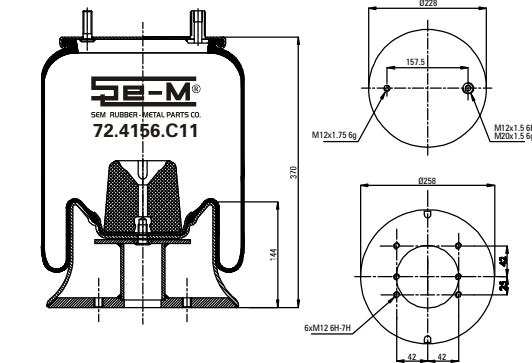

**TECHNICAL SPECIFICATION**

Total Weight : 10 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 370 mm.

Loading Capacity : 2400 kg.

SEM NO. **72.4156.CP10**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES  
Axor

**REF. NO**

Contitech 4156 NP10


Firestone 1D 15 M-6

Dunlop

Phoenix

Goodyear

CF Gomma

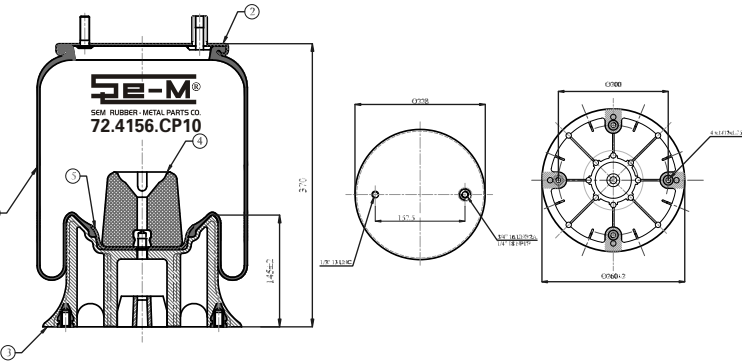

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 370 mm.

Loading Capacity : 2400 kg.


Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4156.CP14**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**  
HENDRICKSON  
NEWAY  
**ROR**  
**REF. NO**

Contitech	4156 NP14
Firestone	
Dunlop	D12 B33
Phoenix	1 DK 23 K-9082
Goodyear	1R12-716
CF Gomma	1T323-32

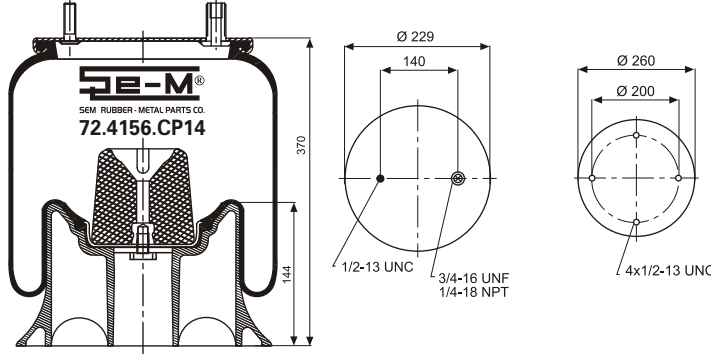

**TECHNICAL SPECIFICATION**


Total Weight	: 7.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 335 mm.
Assembly Height	: 370 mm.
Loading Capacity	: 2400 kg.

SEM NO. **72.4156.CP15**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**  
FRUEHAUF  
HENDRICKSON  
**ROR**  
**REF. NO**

Contitech	4156 NP15
Firestone	1T 15M-6
Dunlop	D12 B19
Phoenix	
Goodyear	1R12-719
CF Gomma	1T 323-33

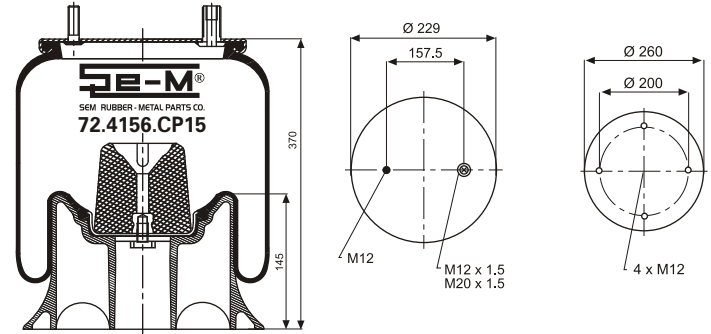

**TECHNICAL SPECIFICATION**


Total Weight	: 7.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 335 mm.
Assembly Height	: 370 mm.
Loading Capacity	: 2400 kg.

SEM NO. **72.4156.CP16**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**  
HENDRICKSON  
**ROR**

<b>REF. NO</b>	
Contitech	4156 NP16
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

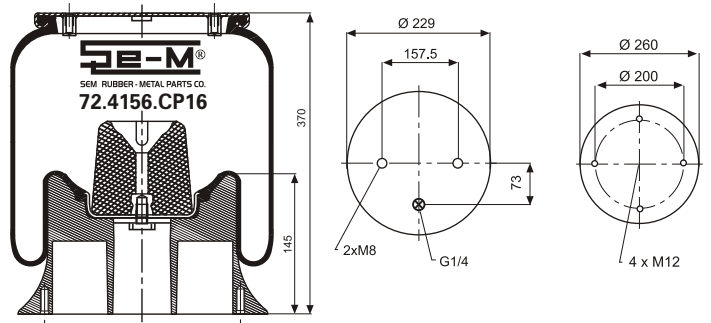

**TECHNICAL SPECIFICATION**


Total Weight	: 6.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 335 mm.
Assembly Height	: 370 mm.
Loading Capacity	: 2400 kg.

SEM NO. **72.4156.S01**

Metalli Pistonsuz / Service Assembly

**MODEL**  
HENDRICKSON  
**ROR**

<b>REF. NO</b>	
Contitech	4156 NP01
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

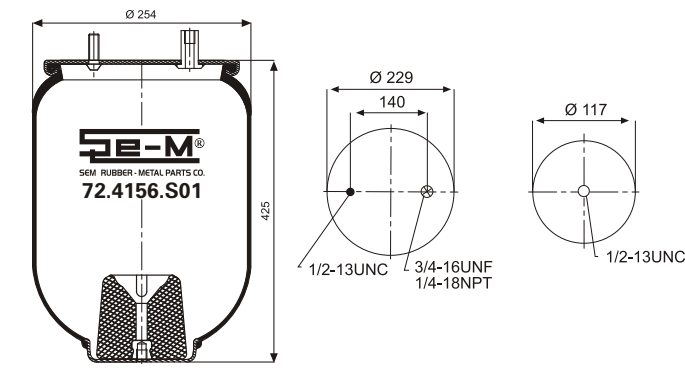

**TECHNICAL SPECIFICATION**

Total Weight	: 4.60 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 335 mm.
Assembly Height	: 370 mm.
Loading Capacity	: 2400 kg.

Süspansiyon Körükleri Grubu / Air Springs Group


SEM NO. **72.4156.S05**

Metalli Pistonsuz / Service Assembly

**MODEL**  
FRUEHAUF

**REF. NO**  
Contitech 4156 NP05

Firestone  
Dunlop  
Phoenix  
Goodyear  
CF Gomma 1T 323-33

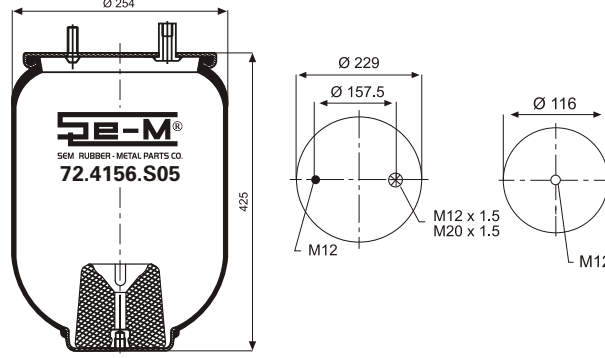

**TECHNICAL SPECIFICATION**

Total Weight : 4.60 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 335 mm.  
Assembly Height : 370 mm.  
Loading Capacity : 2400 kg.


SEM NO. **72.4156.S12**

Metalli Pistonsuz / Service Assembly

**MODEL**  
HENDRICKSON  
MAN

**REF. NO**  
Contitech 4156 NP12

Firestone  
Dunlop  
Phoenix  
Goodyear  
CF Gomma

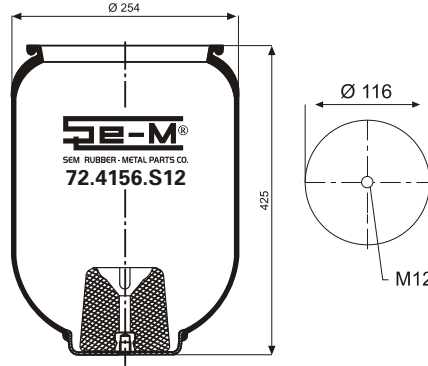

**TECHNICAL SPECIFICATION**

Total Weight : 4.00 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 335 mm.  
Assembly Height : 370 mm.  
Loading Capacity : 2400 kg.


SEM NO. **72.4157.CP03**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
FRUEHAUF  
NEWAY

**REF. NO**  
Contitech 4157 NP03

Firestone  
Dunlop  
Phoenix  
Goodyear  
CF Gomma

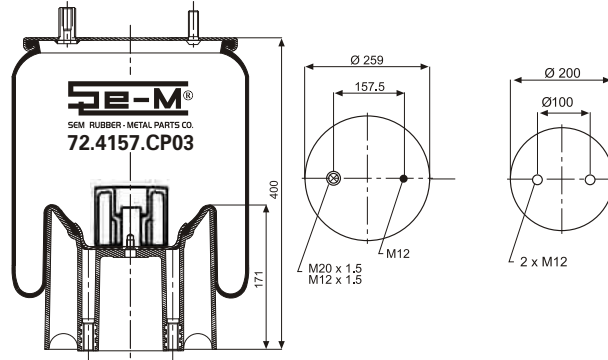

**TECHNICAL SPECIFICATION**

Total Weight : 5.20 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 310 mm.  
Assembly Height : 400 mm.  
Loading Capacity : 2100 kg.


SEM NO. **72.4157.CP04**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**  
MERCEDES  
ROR

**REF. NO**  
Contitech 4157 NP04

Firestone 1T 15MPW-7  
Dunlop D12 B18  
Phoenix 1 DK 21 A-4  
Goodyear 1R11-111  
CF Gomma

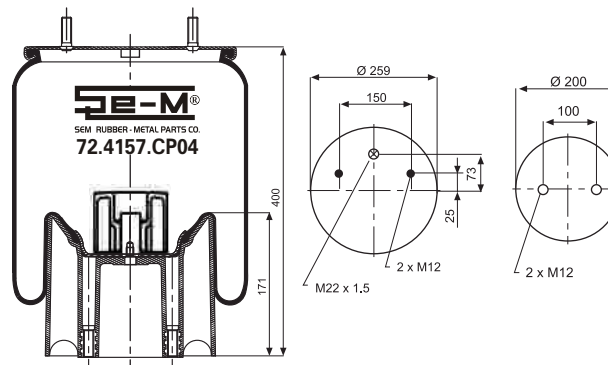

**TECHNICAL SPECIFICATION**

Total Weight : 5.30 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 310 mm.  
Assembly Height : 400 mm.  
Loading Capacity : 2100 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4157.CP05**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

GRANNING  
ROR

**REF. NO**

Contitech	4157 NP05
Firestone	1T 15MPW-7
Dunlop	D12B17
Phoenix	1DK 21 A-3
Goodyear	1R11-106
CF Gomma	

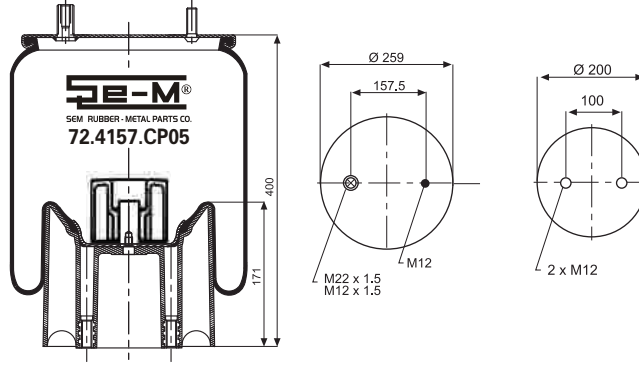

**TECHNICAL SPECIFICATION**

Total Weight	: 5.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4157.CP06**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

ROR

**REF. NO**

Contitech	4157 NP06
Firestone	1T15MPW-7
Dunlop	D11 B37
Phoenix	1DK 20 A-1
Goodyear	1R11-764
CF Gomma	

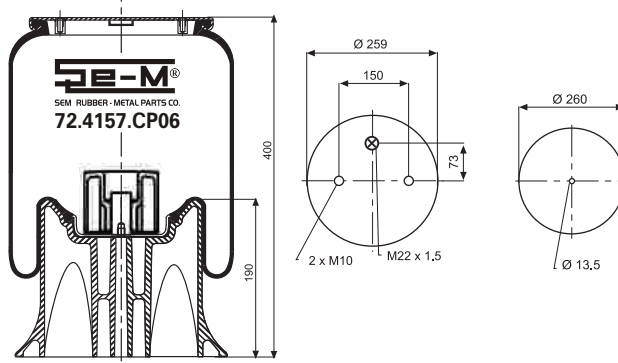

**TECHNICAL SPECIFICATION**

Total Weight	: 5.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2250 kg.

SEM NO. **72.4157.CP08**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

FRUEHAUF  
NEWAY

**REF. NO**

Contitech	4157 NP08
Firestone	
Dunlop	D12 B30
Phoenix	1 DK 20 C-2
Goodyear	1R11-773
CF Gomma	

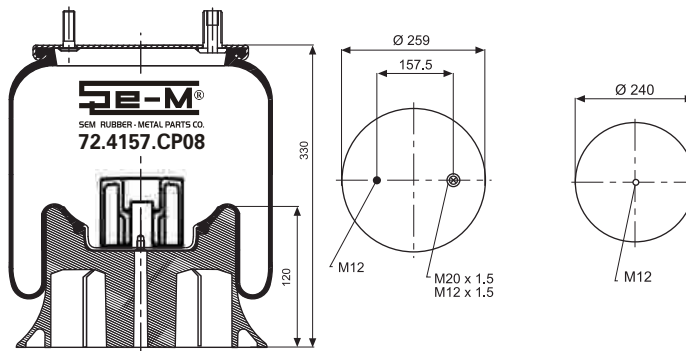

**TECHNICAL SPECIFICATION**

Total Weight	: 5.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 330 mm.
Loading Capacity	: 2200 kg.

SEM NO. **72.4157.CP09**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

ROR

**REF. NO**

Contitech	4157 NP09
Firestone	1T 15MPW-7
Dunlop	D12 B17
Phoenix	1DK 21 A-31
Goodyear	1R11-106
CF Gomma	

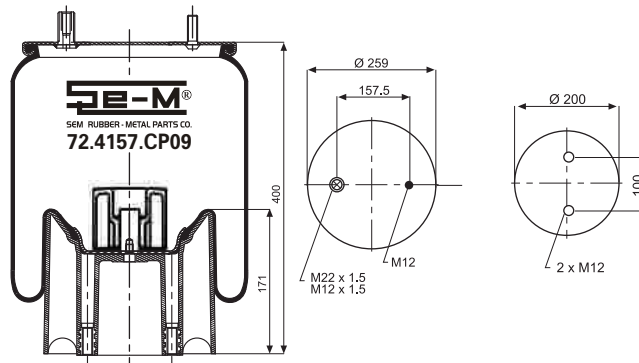

**TECHNICAL SPECIFICATION**

Total Weight	: 5.60 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4157.CP10**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES  
Axor

**REF. NO**

Contitech	4157 NP10
Firestone	
Dunlop	D12B19
Phoenix	1 DK 20A-51
Goodyear	
CF Gomma	

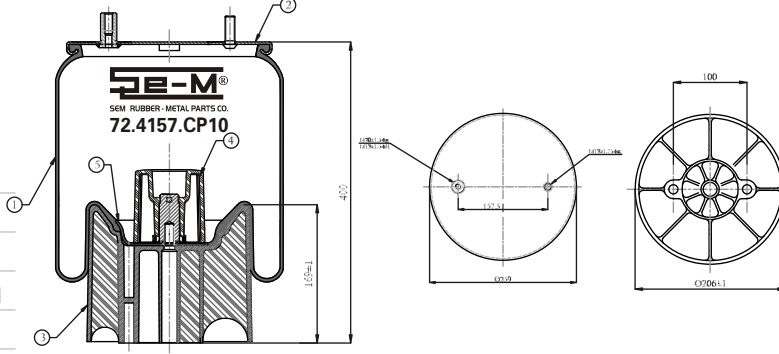

**TECHNICAL SPECIFICATION**

Total Weight	: 6.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4157.S**


Metalli Pistonsuz / Service Assembly

**MODEL**

FRUEHAUF  
ROR

**REF. NO**

Contitech	4157 N
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

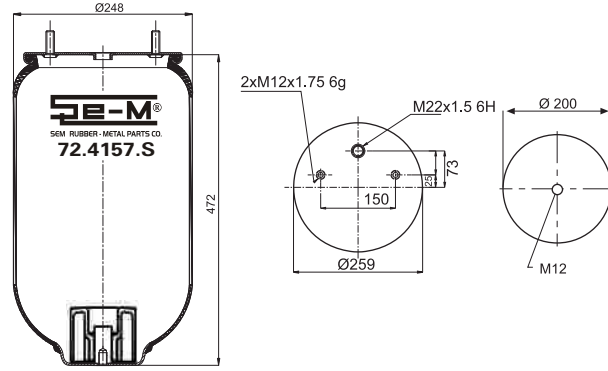

**TECHNICAL SPECIFICATION**

Total Weight	: 5.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4157.S02**


Metalli Pistonsuz / Service Assembly

**MODEL**

ROR

**REF. NO**

Contitech	4157 NP02
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

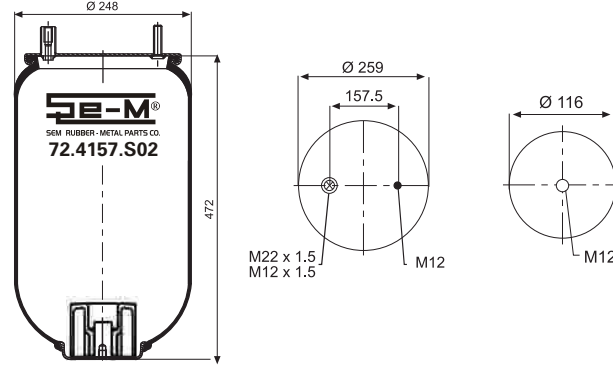

**TECHNICAL SPECIFICATION**

Total Weight	: 4.70 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4158.CP03**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SCHMITZ

**REF. NO**

Contitech	4158 NP03
Firestone	1T 15MPW-9
Dunlop	D12 B22
Phoenix	1 DK 20 B-1
Goodyear	1R12-749
CF Gomma	

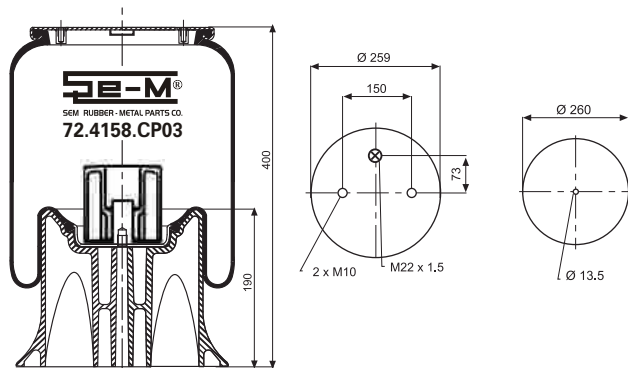

**TECHNICAL SPECIFICATION**

Total Weight	: 6.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4158.S02**


Metalli Pistonsuz / Service Assembly

**MODEL**

SCHMITZ

**REF. NO**

Contitech	4158 NP02
Firestone	1T 15MPW-9
Dunlop	D12 U23
Phoenix	1DK 20 B-1 NP
Goodyear	1R12-748
CF Gomma	

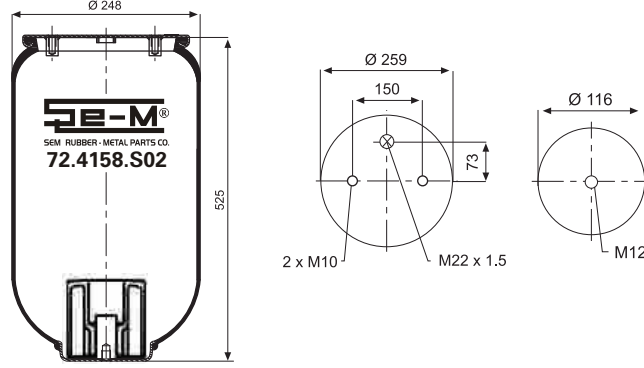

**TECHNICAL SPECIFICATION**

Total Weight	: 5.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4159.C03**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP03
Firestone	1T 15M-9
Dunlop	D12 B08
Phoenix	1DK 23L-27
Goodyear	
CF Gomma	1T323-40

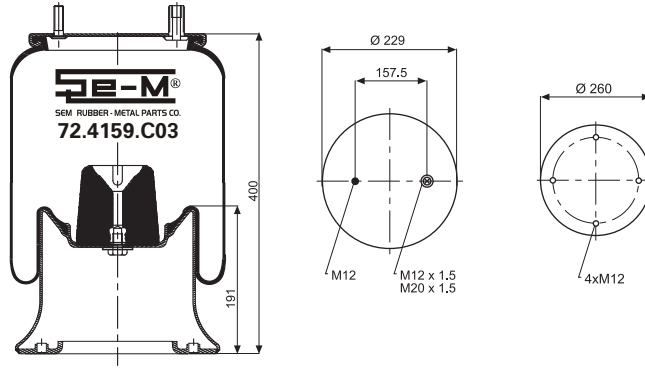

**TECHNICAL SPECIFICATION**

Total Weight	: 11.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.


SEM NO. **72.4159.C04**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

**REF. NO**

Contitech	4159 NP 04
Firestone	1T 15M-9
Dunlop	012B34
Phoenix	1DK 21 B-2
Goodyear	1B 12-717
CF Gomma	1T 323-40

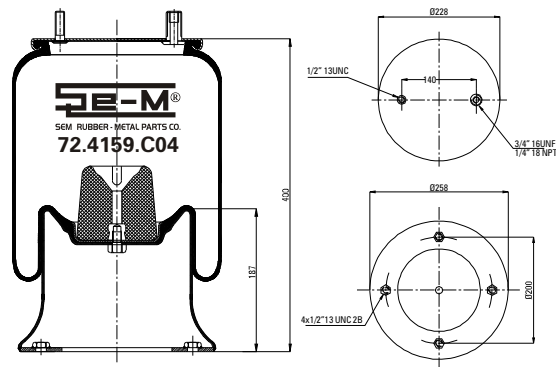

**TECHNICAL SPECIFICATION**

Total Weight	: 11.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.C06**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP06
Firestone	1T 15M-9
Dunlop	D12B01
Phoenix	1 DK 21 B-2
Goodyear	1R12-701
CF Gomma	1T 323-40

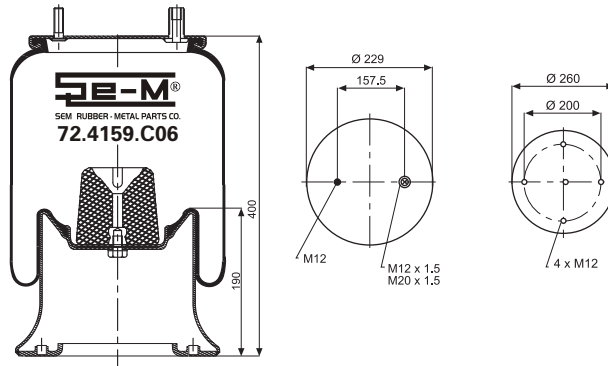

**TECHNICAL SPECIFICATION**

Total Weight	: 11.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4159.C07**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP07
Firestone	
Dunlop	D12 B15
Phoenix	1 DK 23 L -25
Goodyear	1R12-702
CF Gomma	1T 323-40

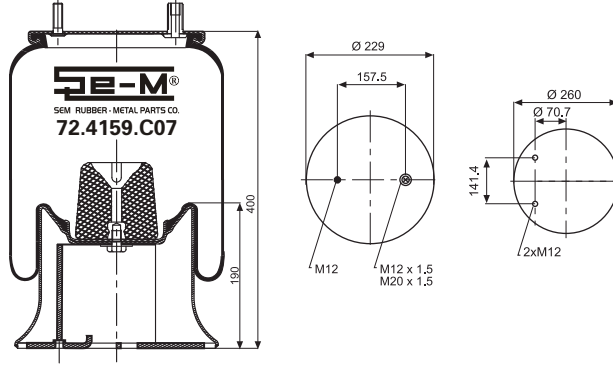

**TECHNICAL SPECIFICATION**

Total Weight	: 14.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.C08**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

HENDRICKSON

**REF. NO**

Contitech	4159 NP08
Firestone	
Dunlop	
Phoenix	
Goodyear	1R12-281
CF Gomma	

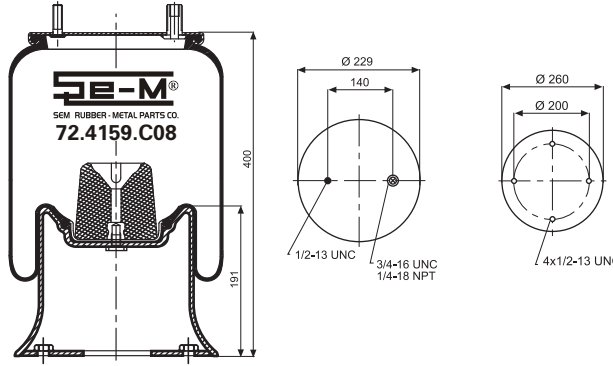

**TECHNICAL SPECIFICATION**

Total Weight	: 8.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 360 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.C10**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP10
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

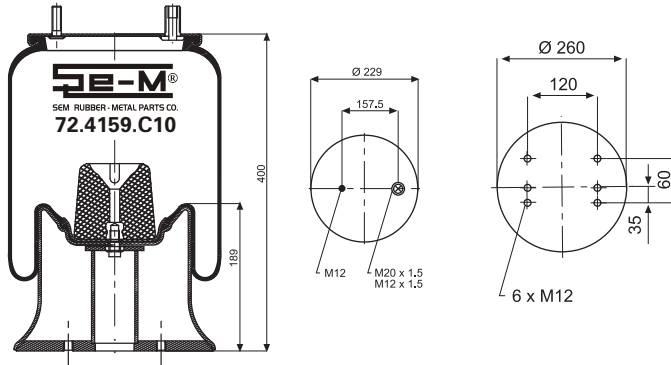

**TECHNICAL SPECIFICATION**

Total Weight	: 14.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.C15**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 Np15
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

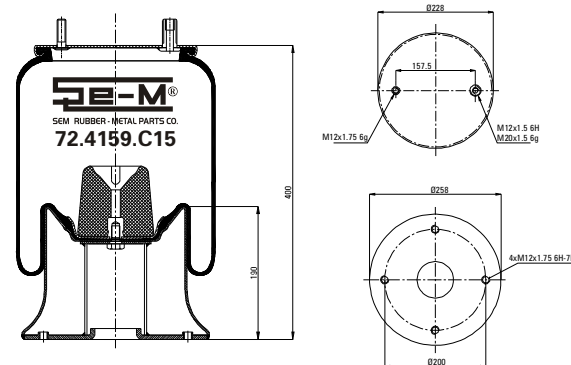

**TECHNICAL SPECIFICATION**

Total Weight	: 8.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 360 mm.
Loading Capacity	: 2450 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4159.CP09**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP09
Firestone	1T 15M-9
Dunlop	D12 B04
Phoenix	1 DK 23 L-9131
Goodyear	1R12-721
CF Gomma	

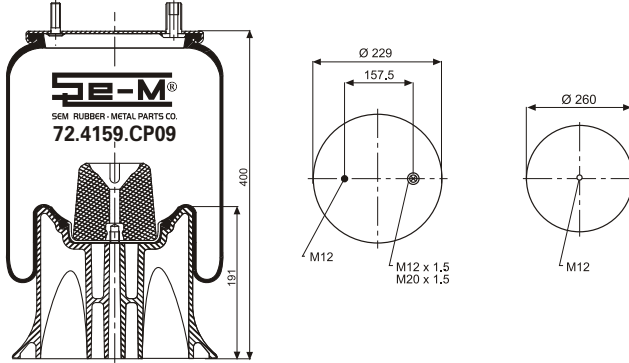

**TECHNICAL SPECIFICATION**

Total Weight	: 9.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.CP11**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

HENDRICKSON

**REF. NO**

Contitech	4159 NP11
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

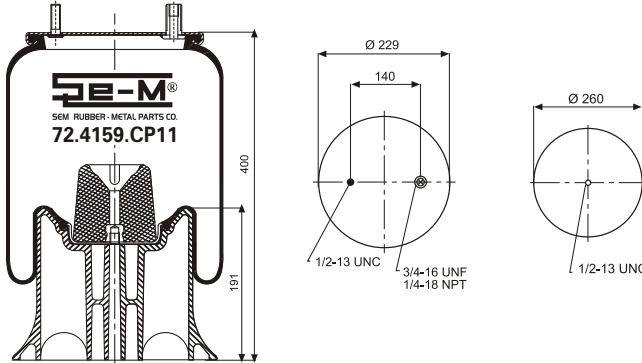

**TECHNICAL SPECIFICATION**

Total Weight	: 7.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.


SEM NO. **72.4159.CP12**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

**REF. NO**

Contitech	4159 NP 12
Firestone	
Dunlop	
Phoenix	1DK 23 L-9101
Goodyear	
CF Gomma	1T 323-40

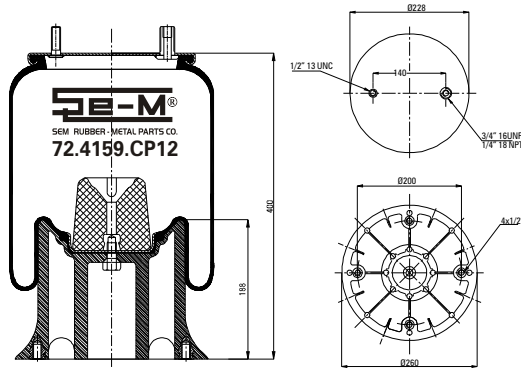

**TECHNICAL SPECIFICATION**

Total Weight	: 7.20 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 345 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.CP13**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

HENDRICKSON

**REF. NO**

Contitech	4159 NP13
Firestone	
Dunlop	
Phoenix	1DK 23L9192
Goodyear	
CF Gomma	

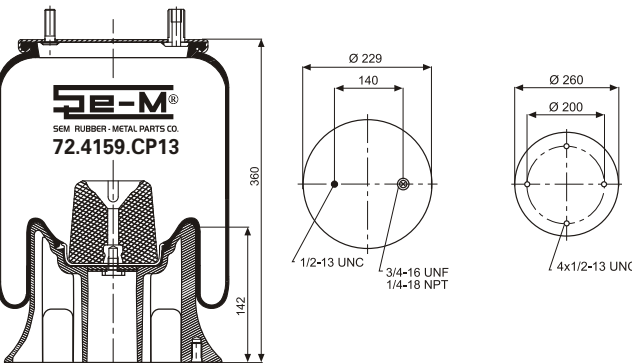

**TECHNICAL SPECIFICATION**

Total Weight	: 7.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 360 mm.
Loading Capacity	: 2450 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4159.CP14**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP14
Firestone	1T 15M-9
Dunlop	
Phoenix	1 DK 21 B-4
Goodyear	
CF Gomma	1T 323-40

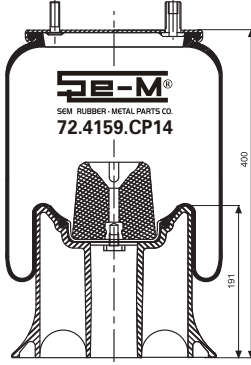

**TECHNICAL SPECIFICATION**

Total Weight	: 7.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.S01**


Metalli Pistonsuz / Service Assembly

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP01
Firestone	1T 15M-9
Dunlop	
Phoenix	1 DK 21 B-2/6
Goodyear	1R12-113
CF Gomma	1T 323-40

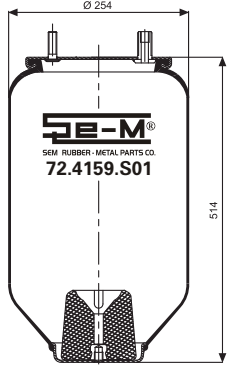

**TECHNICAL SPECIFICATION**

Total Weight	: 5.20 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4159.S05**


Metalli Pistonsuz / Service Assembly

**MODEL**

FRUEHAUF

**REF. NO**

Contitech	4159 NP05
Firestone	1T 15M-9
Dunlop	D12 U04
Phoenix	1 DK 21 B-5 NP
Goodyear	1R12-761
CF Gomma	1T 323-40

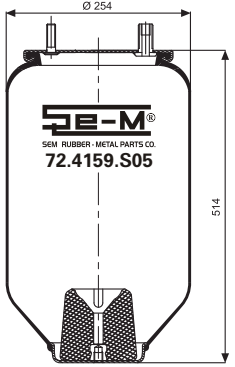

**TECHNICAL SPECIFICATION**

Total Weight	: 5.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2450 kg.

SEM NO. **72.4183.C01**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech	4183 NP01
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

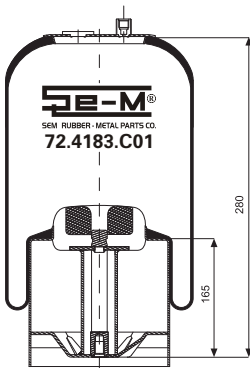

**TECHNICAL SPECIFICATION**

Total Weight	: 11.20 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 370 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 3200 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4183.C21**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4183 NP21



Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

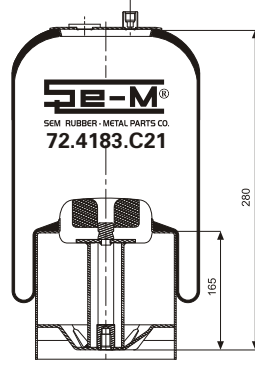

**TECHNICAL SPECIFICATION**  
Total Weight : 11.20 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 370 mm.  
Assembly Height : 280 mm.  
Loading Capacity : 3200 kg.

SEM NO. **72.4183.C24**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4183 NP24



Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

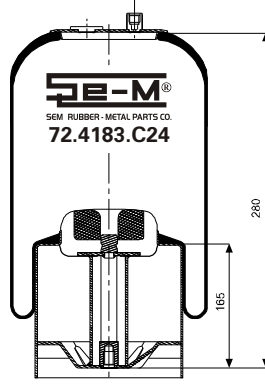

**TECHNICAL SPECIFICATION**  
Total Weight : 11.20 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 370 mm.  
Assembly Height : 280 mm.  
Loading Capacity : 3200 kg.

SEM NO. **72.4183.S1**

Metalli Pistonsuz / Service Assembly

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4183 N1


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma



**TECHNICAL SPECIFICATION**  
Total Weight : 4.20 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 360 mm.  
Assembly Height : 310 mm.  
Loading Capacity : 3200 kg.

SEM NO. **72.4390.C01**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4390 NP01



Firestone

Dunlop D12 T10

Phoenix 1 KF 21-1

Goodyear 9505

CF Gomma

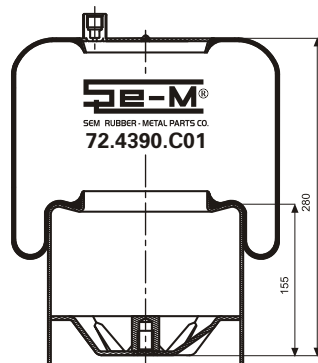

**TECHNICAL SPECIFICATION**  
Total Weight : 8.00 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 300 mm.  
Assembly Height : 280 mm.  
Loading Capacity : 2200 kg.


Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4390.C02**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

REF. NO	
Contitech	4390 NP02
Firestone	
Dunlop	D12 T11
Phoenix	1KF 21-2
Goodyear	9506
CF Gomma	

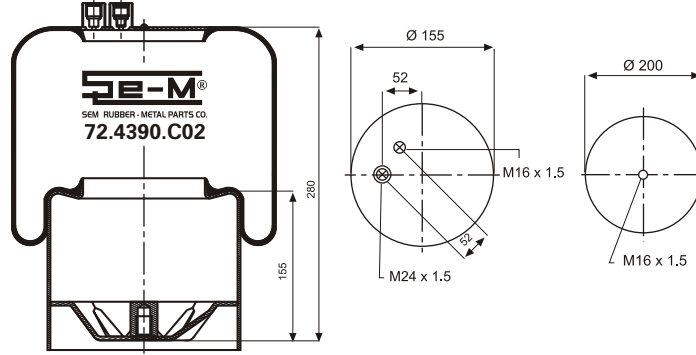


TECHNICAL SPECIFICATION	
Total Weight	: 9.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 300 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 2200 kg.

SEM NO. **72.4390.C03**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

REF. NO	
Contitech	4390 NP03
Firestone	
Dunlop	D12 T11
Phoenix	
Goodyear	9506
CF Gomma	

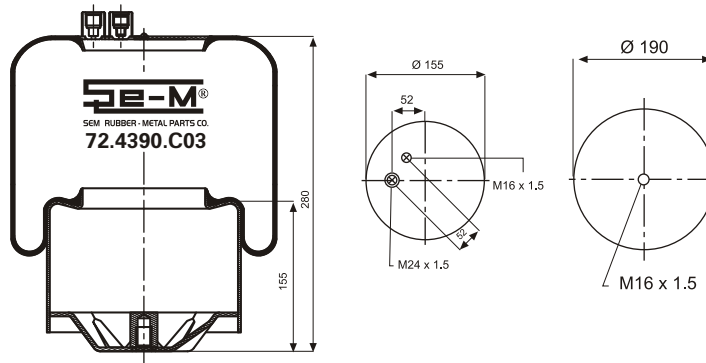


TECHNICAL SPECIFICATION	
Total Weight	: 9.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 300 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 2050 kg.

SEM NO. **72.4390.C04**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

REF. NO	
Contitech	4390 NP04
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

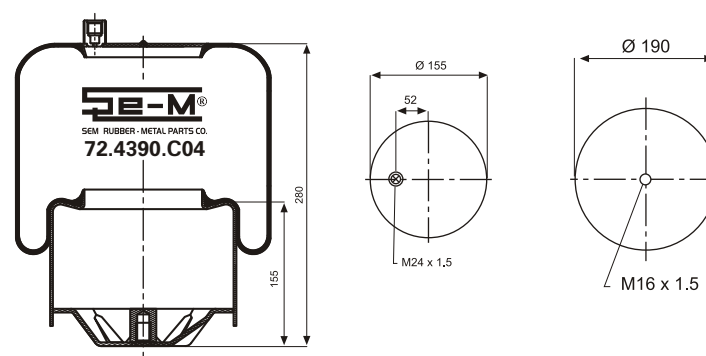


TECHNICAL SPECIFICATION	
Total Weight	: 9.60 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 300 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 2050 kg.

SEM NO. **72.4390.C21**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

REF. NO	
Contitech	4390 NP21
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

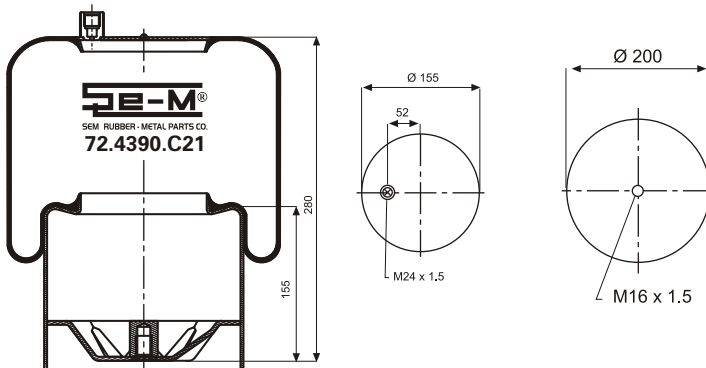

TECHNICAL SPECIFICATION	
Total Weight	: 7.90 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 300 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 2200 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4390.C22**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4390 NP22


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

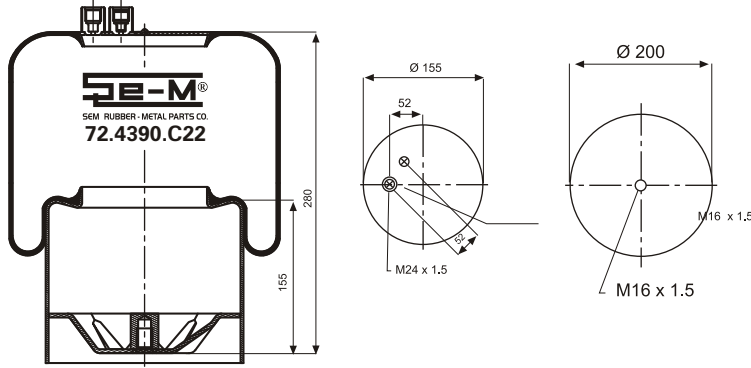

**TECHNICAL SPECIFICATION**

Total Weight : 7.90 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 280 mm.

Loading Capacity : 2200 kg.

SEM NO. **72.4390.C23**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4390 NP24


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

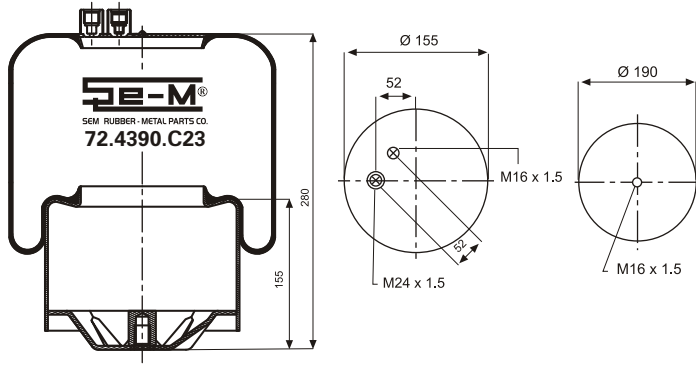

**TECHNICAL SPECIFICATION**

Total Weight : 9.70 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 280 mm.

Loading Capacity : 2050 kg.

SEM NO. **72.4390.C24**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4390 NP24


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

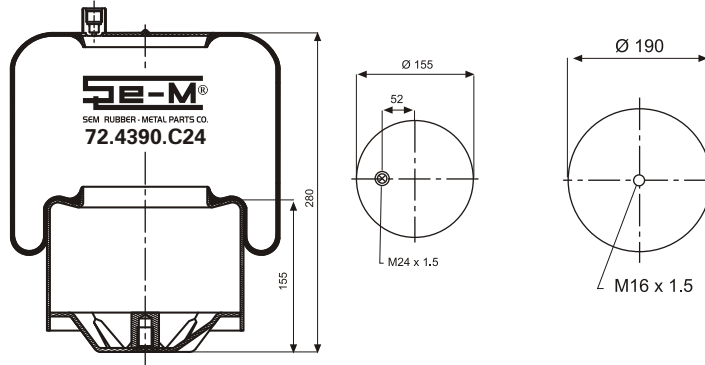

**TECHNICAL SPECIFICATION**

Total Weight : 9.70 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 280 mm.

Loading Capacity : 2050 kg.

SEM NO. **72.4390.S1**

Metalli Pistonsuz / Service Assembly

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4390 N1


Firestone

Dunlop D12 U25

Phoenix 1 KF 21-1 NP

Goodyear 9507

CF Gomma

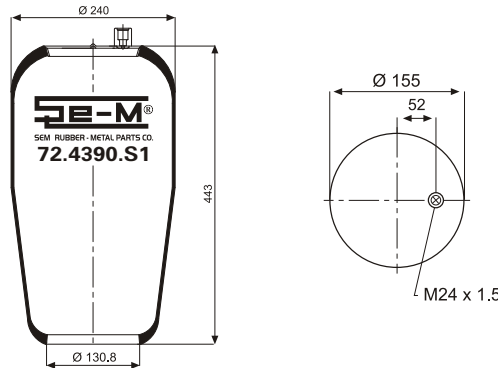

**TECHNICAL SPECIFICATION**

Total Weight : 2.90 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 280 mm.

Loading Capacity : 2200 kg.




Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4390.S2**

Metalli Pistonsuz / Service Assembly

**MODEL**  
MERCEDES

REF. NO	
Contitech	4390 N2
Firestone	
Dunlop	D12 U26
Phoenix	1 KF 21-2 NP
Goodyear	9508
CF Gomma	

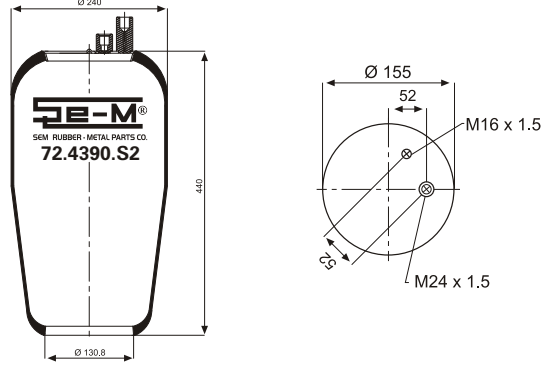


TECHNICAL SPECIFICATION	
Total Weight	: 3.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 300 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 2200 kg.

SEM NO. **72.4713.C02**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
VOLVO

REF. NO	
Contitech	4713 NP02
Firestone	
Dunlop	D12 B24
Phoenix	1 DF 22 C-1
Goodyear	1R12-762
CF Gomma	

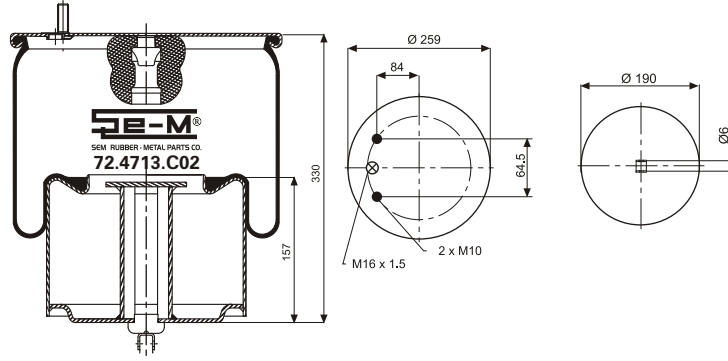


TECHNICAL SPECIFICATION	
Total Weight	: 10.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 330 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4713.S**

Metalli Pistonsuz / Service Assembly

**MODEL**  
VOLVO

REF. NO	
Contitech	4713 N o.k.
Firestone	
Dunlop	D12 U24
Phoenix	
Goodyear	1R12-763
CF Gomma	

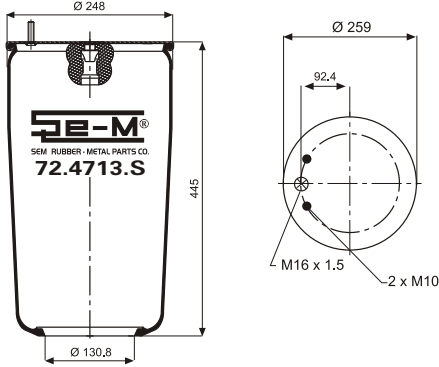


TECHNICAL SPECIFICATION	
Total Weight	: 4.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 330 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.4718.C01**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
VOLVO

REF. NO	
Contitech	4718 NP01
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

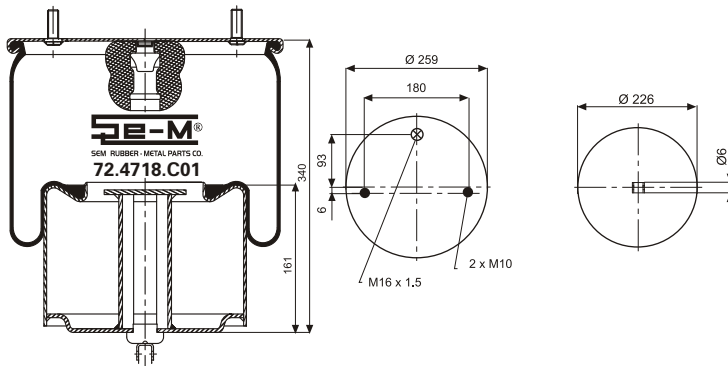

TECHNICAL SPECIFICATION	
Total Weight	: 10.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 330 mm.
Assembly Height	: 340 mm.
Loading Capacity	: 2500 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4718.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

VOLVO

**REF. NO**

Contitech 4718 N. o.K


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

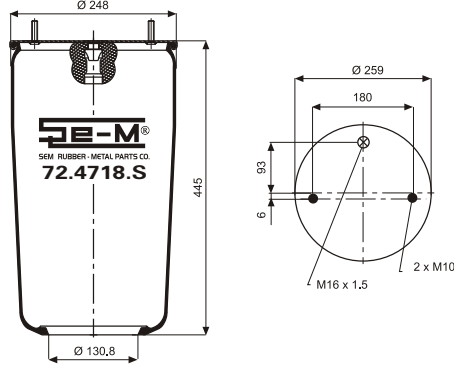

**TECHNICAL SPECIFICATION**

Total Weight : 10.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 330 mm.

Assembly Height : 340 mm.

Loading Capacity : 2500 kg.

SEM NO. **72.4757.C01**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4157 NP01


Firestone

Dunlop D13 T01

Phoenix

Goodyear 9519

CF Gomma

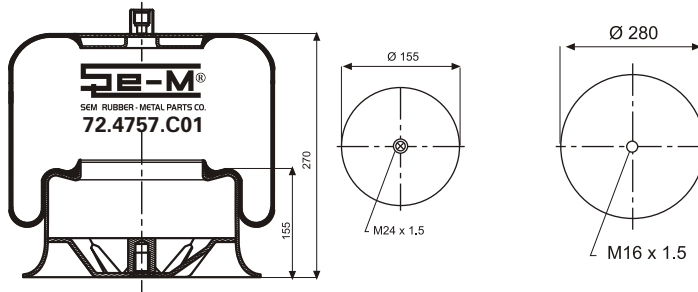

**TECHNICAL SPECIFICATION**

Total Weight : 9.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 320 mm.

Assembly Height : 270 mm.

Loading Capacity : 2450 kg.

SEM NO. **72.4757.C09**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4157 NP09


Firestone

Dunlop D13 T02

Phoenix

Goodyear 9520

CF Gomma

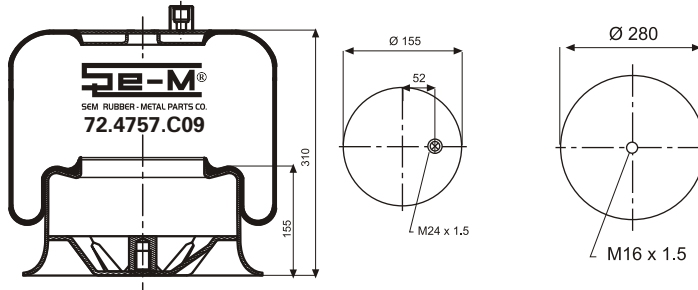

**TECHNICAL SPECIFICATION**

Total Weight : 9.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 320 mm.

Assembly Height : 310 mm.

Loading Capacity : 2400 kg.

SEM NO. **72.4757.C21**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4757 NP21


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

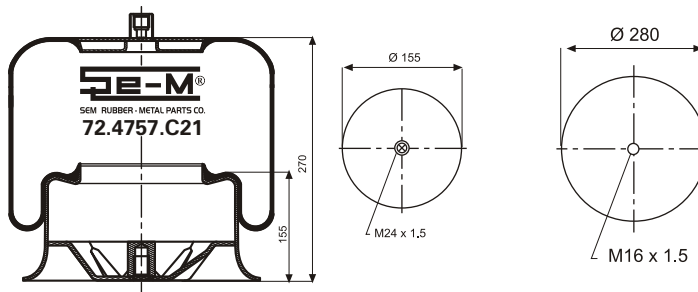

**TECHNICAL SPECIFICATION**

Total Weight : 9.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 320 mm.

Assembly Height : 270 mm.

Loading Capacity : 2450 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4757.C29**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4757 NP29


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

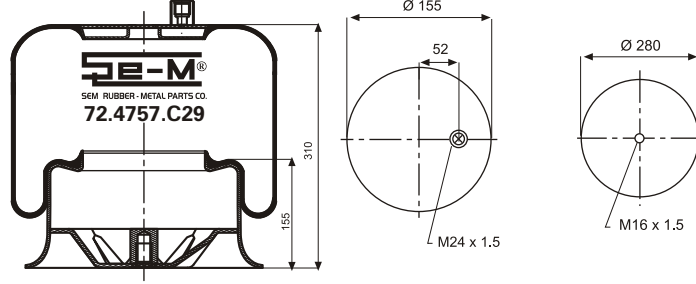

**TECHNICAL SPECIFICATION**

Total Weight : 9.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 320 mm.

Assembly Height : 310 mm.

Loading Capacity : 2400 kg.

SEM NO. **72.4757.S1**

Metalli Pistonsuz / Service Assembly

**MODEL**

MERCEDES

**REF. NO**

Contitech 4757 N1


Firestone

Dunlop D13 U42

Phoenix

Goodyear 9517

CF Gomma

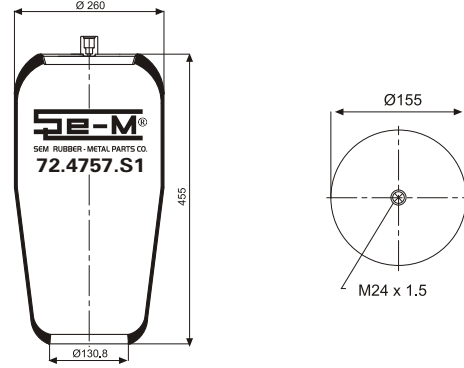

**TECHNICAL SPECIFICATION**

Total Weight : 3.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 320 mm.

Assembly Height : 270 mm.

Loading Capacity : 2450 kg.

SEM NO. **72.4757.S2**

Metalli Pistonsuz / Service Assembly

**MODEL**

MERCEDES

**REF. NO**

Contitech 4757 N2


Firestone

Dunlop D13 U43

Phoenix

Goodyear 9518

CF Gomma

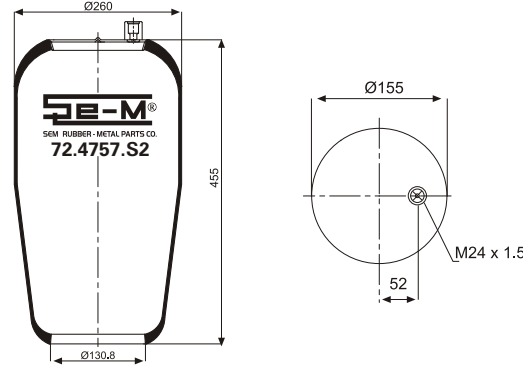

**TECHNICAL SPECIFICATION**

Total Weight : 3.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 30 mm.

Assembly Height : 270 mm.

Loading Capacity : 2450 kg.

SEM NO. **72.4813.C07**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SCANIA

**REF. NO**

Contitech 4813 NP07


Firestone 1T 19L-11

Dunlop D13 B10

Phoenix 1D 28 B-9

Goodyear 1R14-727

CF Gomma 1T19E-2 BR

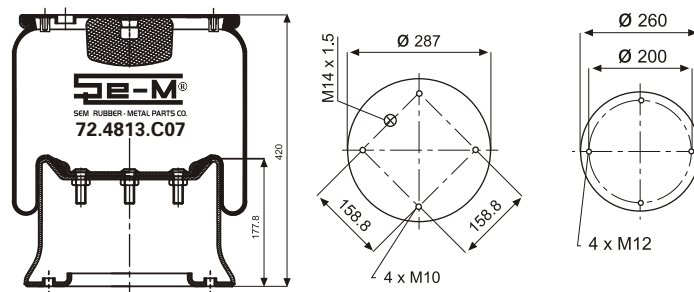

**TECHNICAL SPECIFICATION**

Total Weight : 13.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 350 mm.

Assembly Height : 420 mm.

Loading Capacity : 2750 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4813.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

SCANIA

**REF. NO**

Contitech 4813 MB/0


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

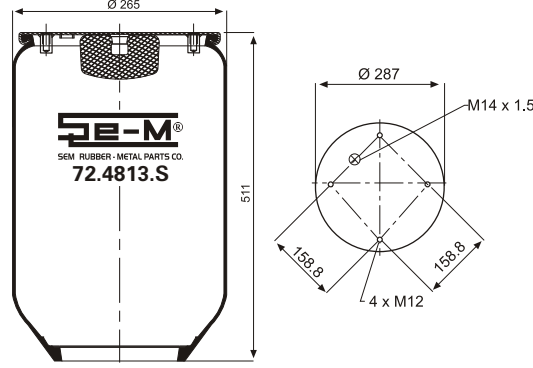

**TECHNICAL SPECIFICATION**

Total Weight : 5.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 365 mm.

Assembly Height : 420 mm.

Loading Capacity : 2900 kg.

SEM NO. **72.4838.C01**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4838 NP01


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

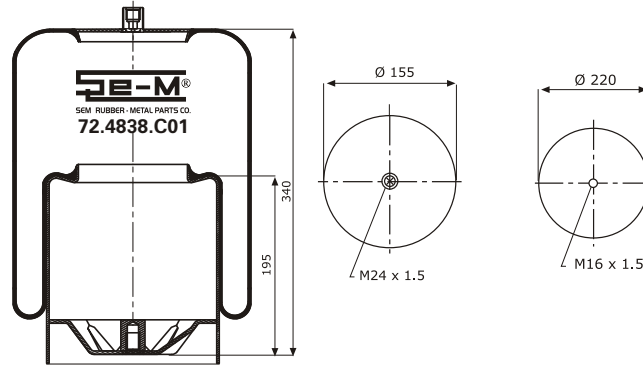

**TECHNICAL SPECIFICATION**

Total Weight : 8.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 360 mm.

Assembly Height : 340 mm.

Loading Capacity : 2600 kg.

SEM NO. **72.4838.C02**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4838 NP02


Firestone

Dunlop D13 T03

Phoenix

Goodyear 9522

CF Gomma

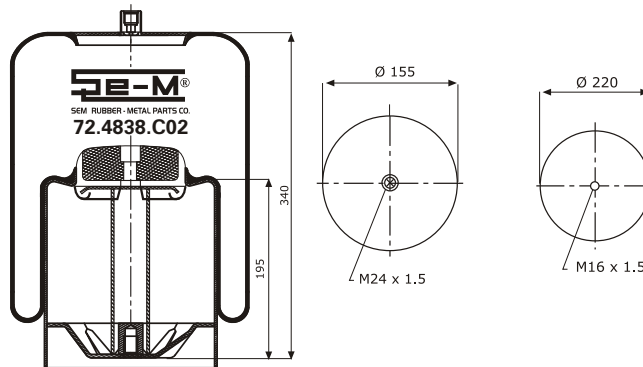

**TECHNICAL SPECIFICATION**

Total Weight : 9.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 360 mm.

Assembly Height : 340 mm.

Loading Capacity : 2600 kg.

SEM NO. **72.4838.C03**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MERCEDES

**REF. NO**

Contitech 4838 NP03


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

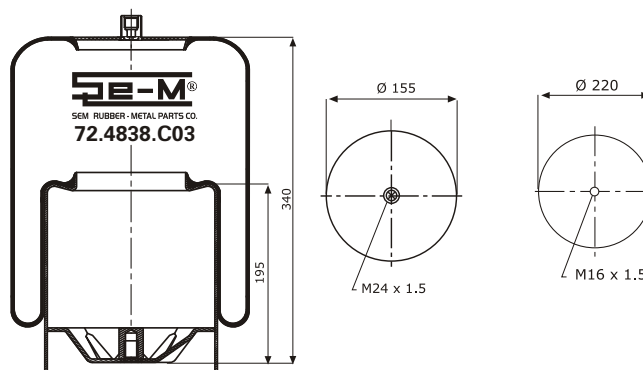

**TECHNICAL SPECIFICATION**

Total Weight : 11.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 360 mm.

Assembly Height : 340 mm.

Loading Capacity : 2700 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4838.C21**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4838 NP21


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

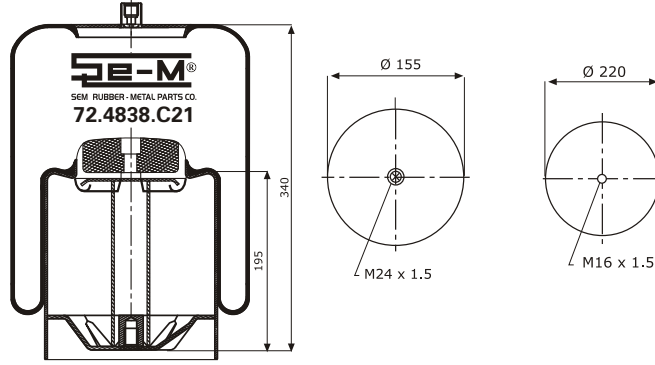

**TECHNICAL SPECIFICATION**

Total Weight : 8.80 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 360 mm.  
Assembly Height : 340 mm.  
Loading Capacity : 2600 kg.

SEM NO. **72.4838.C22**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4838 NP22


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

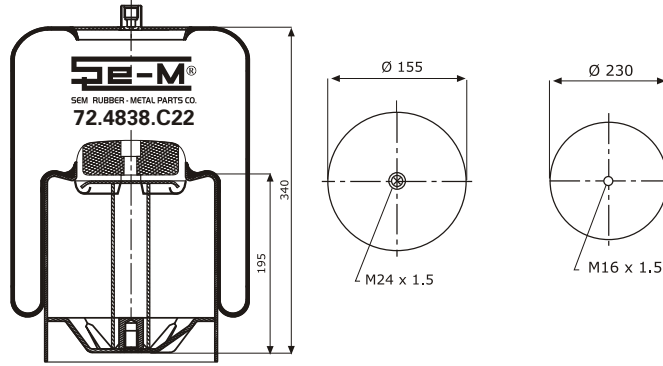

**TECHNICAL SPECIFICATION**

Total Weight : 10.00 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 360 mm.  
Assembly Height : 340 mm.  
Loading Capacity : 2600 kg.

SEM NO. **72.4838.C23**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4838 NP23


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

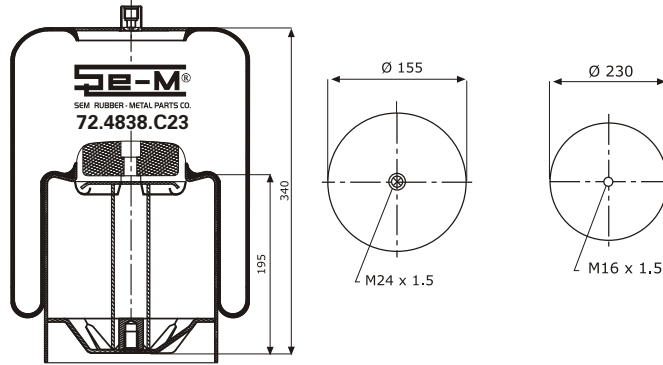

**TECHNICAL SPECIFICATION**

Total Weight : 11.00 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 360 mm.  
Assembly Height : 340 mm.  
Loading Capacity : 2700 kg.

SEM NO. **72.4838.S1**

Metalli Pistonsuz / Service Assembly

**MODEL**  
MERCEDES

**REF. NO**  
Contitech 4838 N1


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

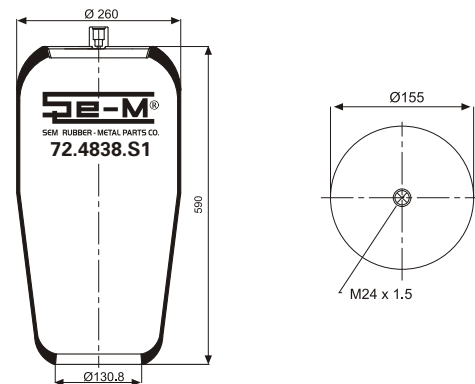

**TECHNICAL SPECIFICATION**

Total Weight : 3.60 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 360 mm.  
Assembly Height : 340 mm.  
Loading Capacity : 2600 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4881.C**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

BPW

**REF. NO**

Contitech	4881 MB
Firestone	1T 66D-7.0
Dunlop	D14 B37
Phoenix	1 DK 32 K
Goodyear	1R14-724
CF Gomma	

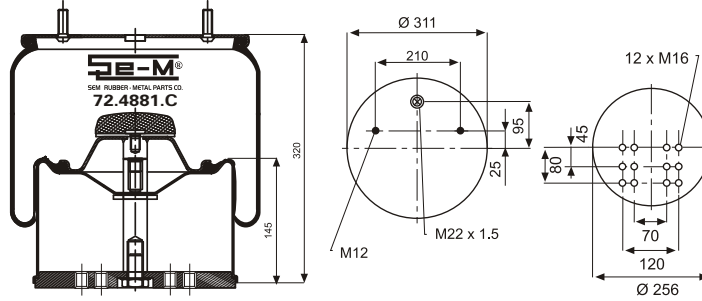

**TECHNICAL SPECIFICATION**

Total Weight	: 16.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 380 mm.
Assembly Height	: 320 mm.
Loading Capacity	: 3200 kg.

SEM NO. **72.4881.CP**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

BPW

**REF. NO**

Contitech	4881 MB
Firestone	1T 66D-7.0
Dunlop	D14 B44
Phoenix	1DK 32 K
Goodyear	1R14-757
CF Gomma	

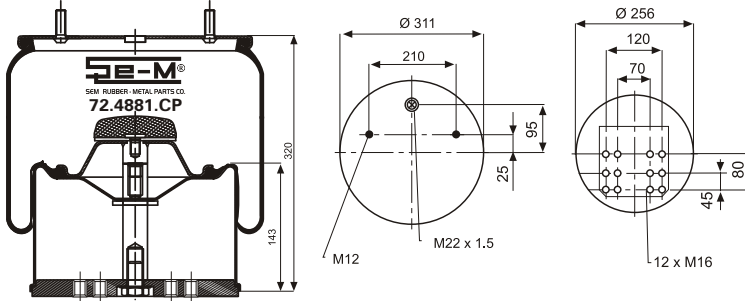

**TECHNICAL SPECIFICATION**

Total Weight	: 12.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 380 mm.
Assembly Height	: 320 mm.
Loading Capacity	: 3200 kg.

SEM NO. **72.4881.S02**


Metalli Pistonsuz / Service Assembly

**MODEL**

BPW

**REF. NO**

Contitech	4881 NP02
Firestone	1T 66D - 7.0
Dunlop	D14 U37
Phoenix	1 DK 32 K
Goodyear	1R 14-701
Pirelli	

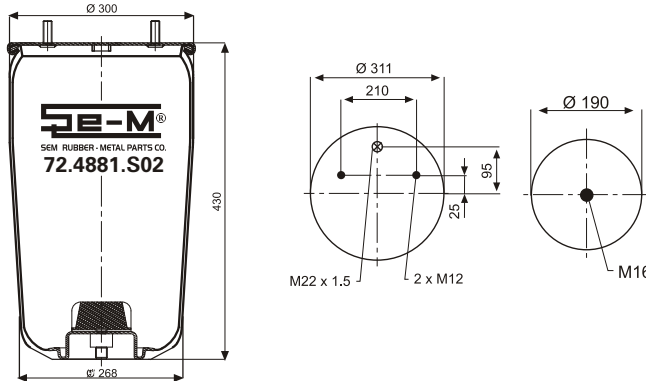

**TECHNICAL SPECIFICATION**

Total Weight	: 6.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 380 mm.
Assembly Height	: 320 mm.
Loading Capacity	: 3200 kg.

SEM NO. **72.4882.C05**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MAN

**REF. NO**

Contitech	4882 N1 P05
Firestone	
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

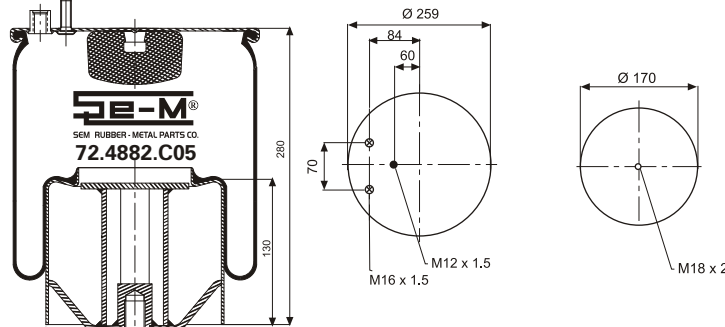

**TECHNICAL SPECIFICATION**

Total Weight	: 10.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 280 mm.
Assembly Height	: 280 mm.
Loading Capacity	: 1800 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4882.S02**

Metalli Pistonsuz / Service Assembly

**MODEL**

MAN

**REF. NO**

Contitech 4882 N1 P02


Firestone

Dunlop D10 U01

Phoenix

Goodyear 1R10-702

CF Gomma

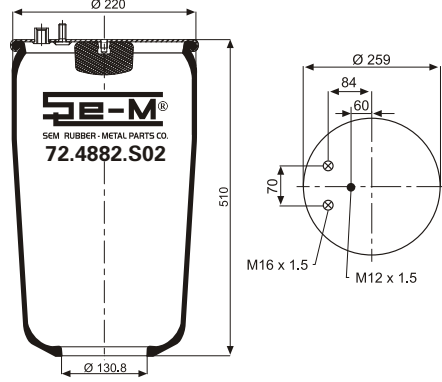

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 280 mm.

Assembly Height : 410 mm.

Loading Capacity : 1800 kg.

SEM NO. **72.4883.C05**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MAN

**REF. NO**

Contitech 4883 N1 P05


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

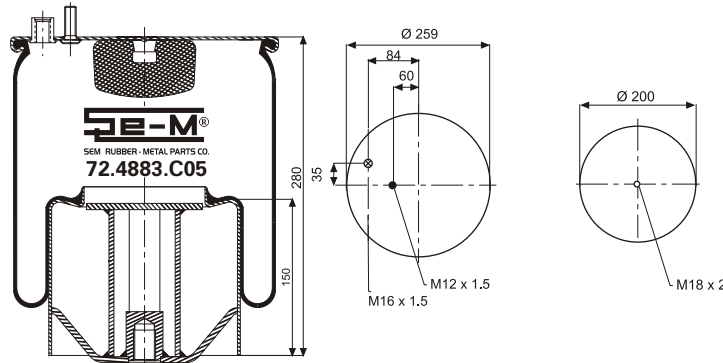

**TECHNICAL SPECIFICATION**

Total Weight : 10.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 280 mm.

Assembly Height : 280 mm.

Loading Capacity : 2000 kg.

SEM NO. **72.4883.S02**

Metalli Pistonsuz / Service Assembly

**MODEL**

MAN

**REF. NO**

Contitech 4883 N1 P02


Firestone

Dunlop D11 U47

Phoenix

Goodyear 1R11-804

CF Gomma

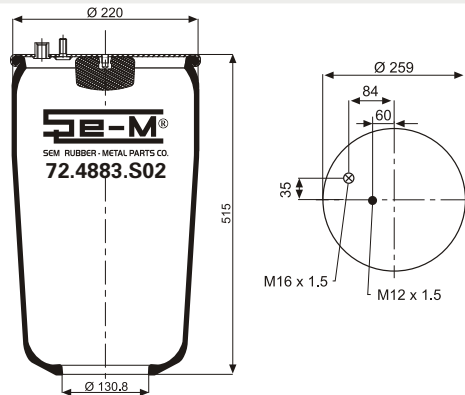

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 410 mm.

Loading Capacity : 2100 kg.

SEM NO. **72.4884.C06**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

MAN

**REF. NO**

Contitech 4884 N1 P06


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

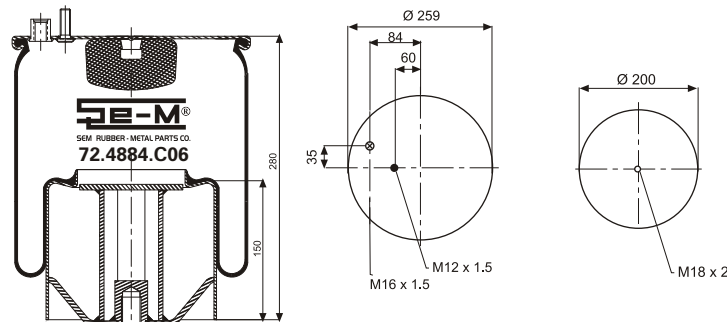

**TECHNICAL SPECIFICATION**

Total Weight : 10.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 280 mm.

Assembly Height : 280 mm.

Loading Capacity : 1900 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4884.S02**

Metalli Pistonsuz / Service Assembly

**MODEL**

MAN

**REF. NO**

Contitech 4884 N1 P02


Firestone

Dunlop D11 U48

Phoenix

Goodyear 1R11-820

CF Gomma

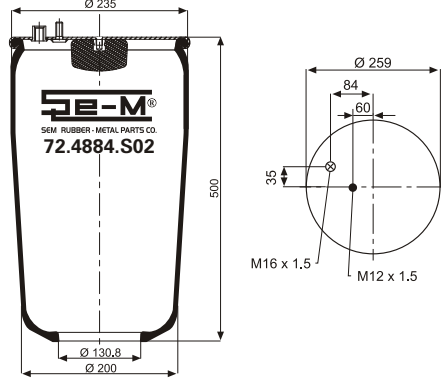

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 410 mm.

Loading Capacity : 2100 kg.

SEM NO. **72.4912.C07**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

RVI

**REF. NO**

Contitech 4912 NP07


Firestone 1T 19L-14

Dunlop D13 B40

Phoenix 1 DK 28 F-4

Goodyear 1R13-711

CF Gomma

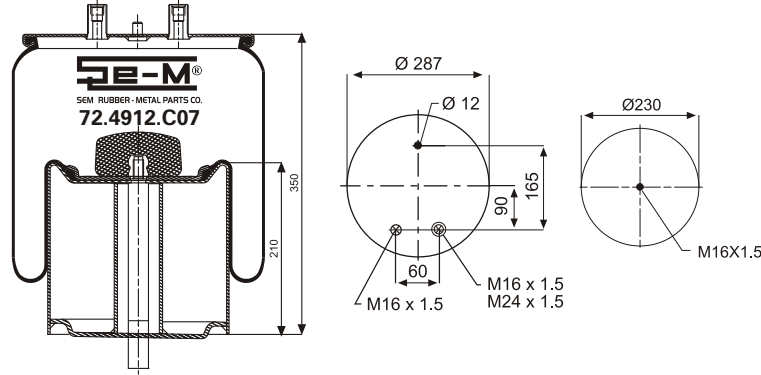

**TECHNICAL SPECIFICATION**

Total Weight : 14.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 410 mm.

Loading Capacity : 2700 kg.

SEM NO. **72.4912.C10**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

RVI

**REF. NO**

Contitech 4912 NP10


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

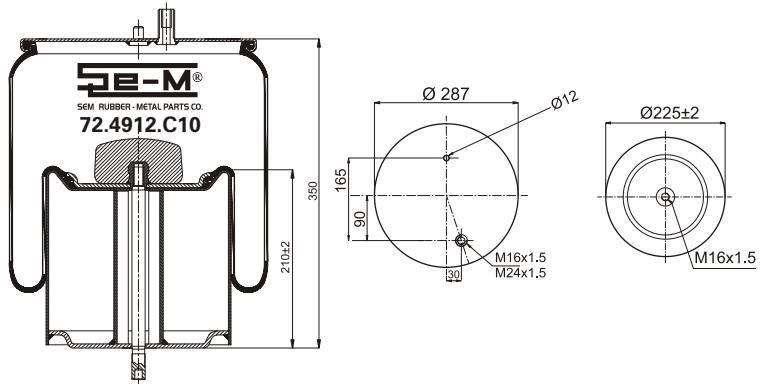

**TECHNICAL SPECIFICATION**

Total Weight : 14.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 410 mm.

Loading Capacity : 2700 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4912.S08**

Metalli Pistonsuz / Service Assembly

**MODEL**

RVI

**REF. NO**

Contitech 4912 NP08


Firestone

Dunlop D13 U40

Phoenix

Goodyear 1R13-713

CF Gomma

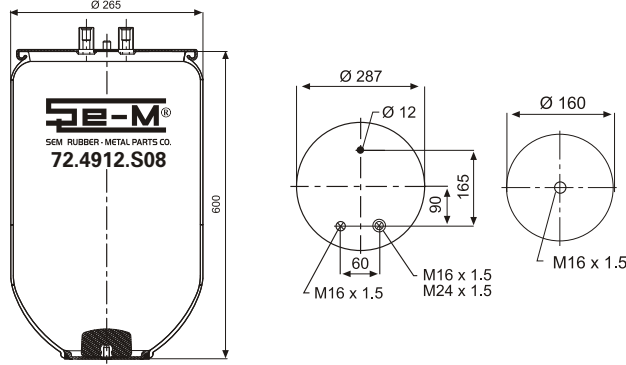

**TECHNICAL SPECIFICATION**

Total Weight : 9.70 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 410 mm.

Loading Capacity : 2700 kg.

SEM NO. **72.4912.S10**

Metalli Pistonsuz / Service Assembly

**MODEL**

**REF. NO**

Contitech 4912 NP 10


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

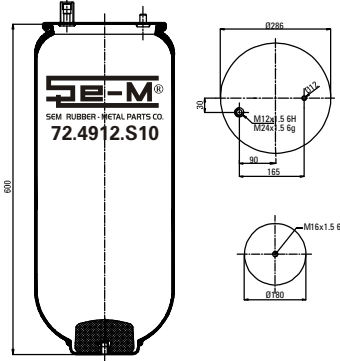

**TECHNICAL SPECIFICATION**

Total Weight : 9.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 335 mm.

Assembly Height : 410 mm.

Loading Capacity : 2700 kg.

SEM NO. **72.4913.C02**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SCANIA

**REF. NO**

Contitech 4913 NP02


Firestone 1T19L-14

Dunlop D14 B42

Phoenix 1 D 28 H-16

Goodyear 1R14-753

CF Gomma

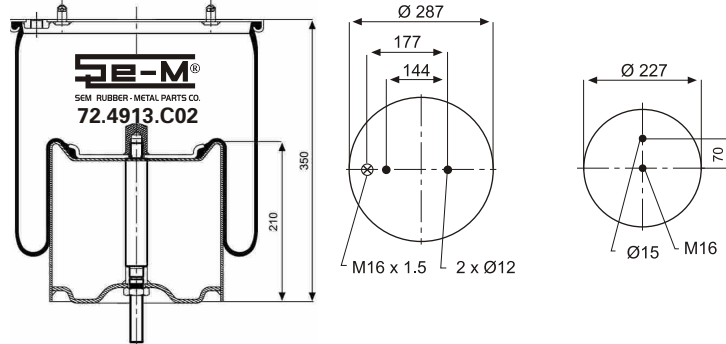

**TECHNICAL SPECIFICATION**

Total Weight : 13.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 350 mm.

Assembly Height : 350 mm.

Loading Capacity : 2700 kg.

SEM NO. **72.4913.S04**

Metalli Pistonsuz / Service Assembly

**MODEL**

SCANIA

**REF. NO**

Contitech 4913 NP04


Firestone

Dunlop D14 U42

Phoenix 1D 28 H-16 NP

Goodyear 1R-14-755

CF Gomma

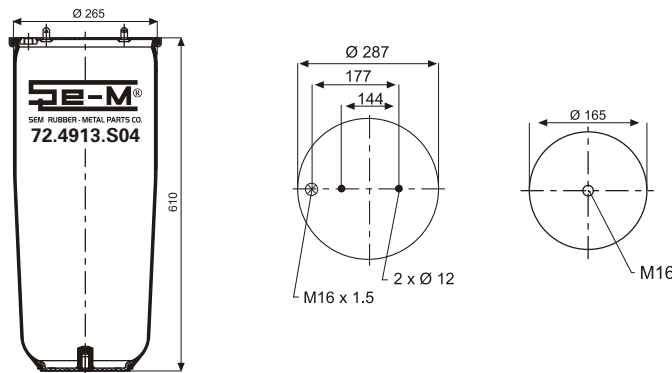

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 350 mm.

Assembly Height : 350 mm.

Loading Capacity : 2700 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.4915.C06**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

**REF. NO**

Contitech 4159 NP 06


Firestone

Dunlop

Phoenix 1DK 19-1

Goodyear

CF Gomma

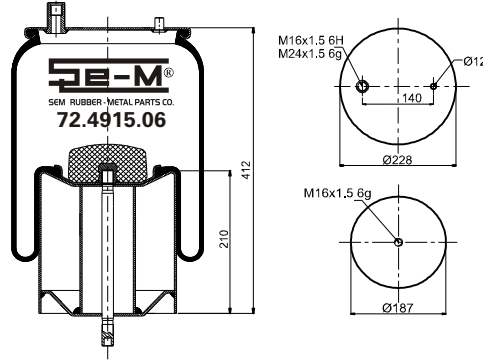

**TECHNICAL SPECIFICATION**

Total Weight : 10 kg.

Operation Pressure : 5.0 bar

Operation Space : 305 mm.

Assembly Height : 500 mm.

Loading Capacity : 3000 kg.

SEM NO. **72.4915.S03**

Metalli Pistonsuz / Service Assembly

**MODEL**

SAF

**REF. NO**

Contitech 4159 NP 03


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

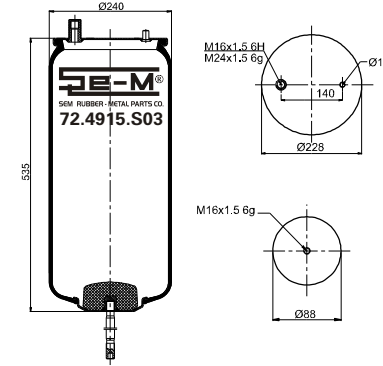

**TECHNICAL SPECIFICATION**

Total Weight : 5.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 500 mm.

Loading Capacity : 3000 kg.

SEM NO. **72.6416.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

VOLVO

**REF. NO**

Contitech 6416 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

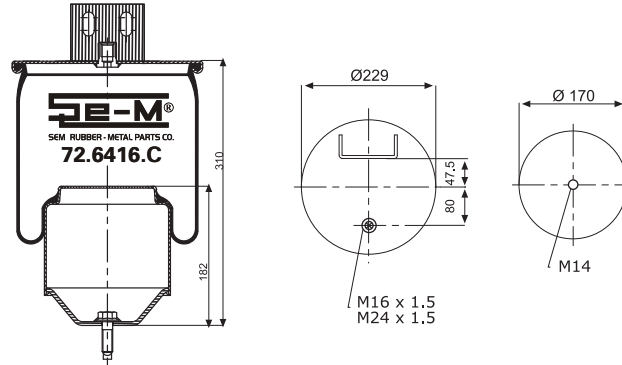

**TECHNICAL SPECIFICATION**

Total Weight : 9.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 290 mm.

Assembly Height : 310 mm.

Loading Capacity : 1850 kg.

SEM NO. **72.6416.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

VOLVO

**REF. NO**

Contitech 6416 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

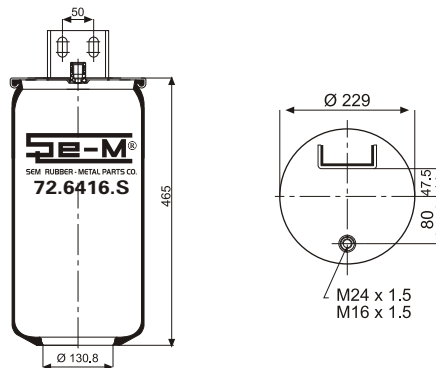

**TECHNICAL SPECIFICATION**

Total Weight : 6.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 290 mm.

Assembly Height : 310 mm.

Loading Capacity : 1850 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.6418.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

VOLVO

**REF. NO**

Contitech 6418 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

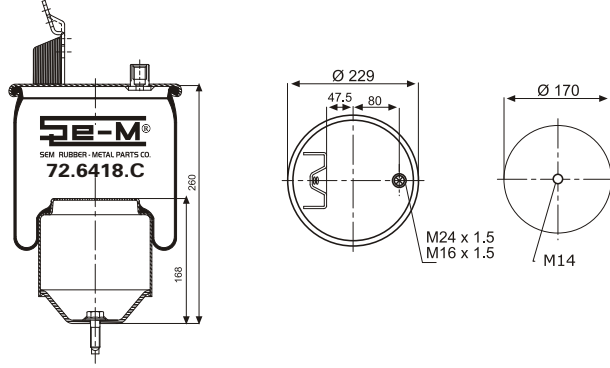

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.6418.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

VOLVO

**REF. NO**

Contitech 6418 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

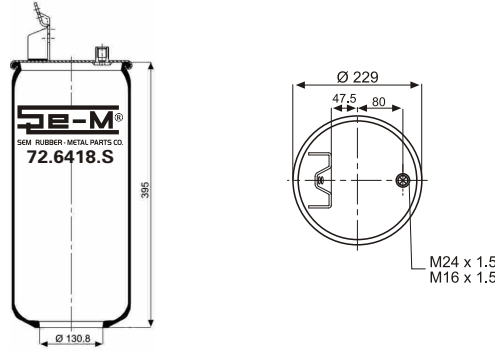

**TECHNICAL SPECIFICATION**

Total Weight : 4.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.6420.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

VOLVO

**REF. NO**

Contitech 6420 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

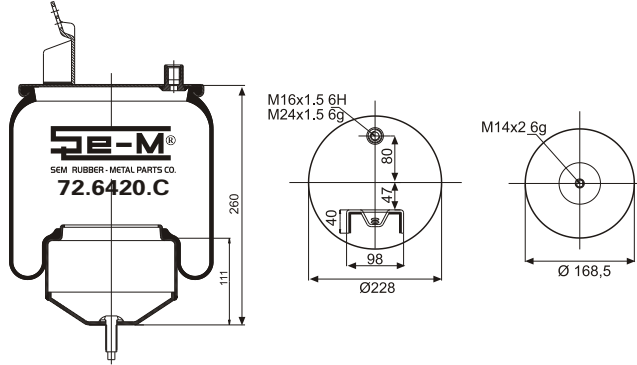

**TECHNICAL SPECIFICATION**

Total Weight : 5.70 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1500 kg.

SEM NO. **72.6420.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

VOLVO

**REF. NO**

Contitech 6420 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

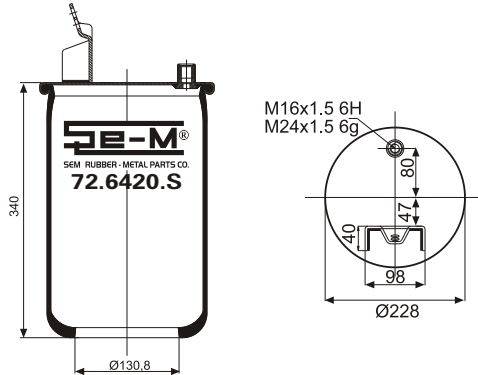

**TECHNICAL SPECIFICATION**

Total Weight : 1.60 kg.

Operation Pressure : 5.0 bar

Operation Space : 320 mm.

Assembly Height : 275 mm.


Loading Capacity : 2200 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.644.R**

Roll / Rolling Lobe Air Spring

<b>MODEL</b>	NEOPLAN
MERCEDES	SCANIA
MAN	
IKARUS	
<b>REF. NO</b>	
Contitech	644 N
Firestone	1R1A 390 295
Dunlop	D11 S01
Phoenix	1 E 21
Goodyear	8017
CF Gomma	1S 285-24

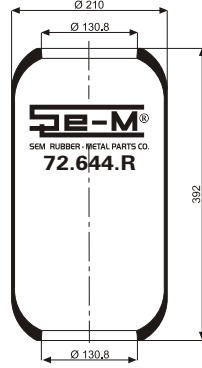


<b>TECHNICAL SPECIFICATION</b>	
Total Weight	: 1.60 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 320 mm.
Assembly Height	: 275 mm.
Loading Capacity	: 2200 kg.

SEM NO. **72.661.R**

Roll / Rolling Lobe Air Spring

<b>MODEL</b>	NEOPLAN
MERCEDES	KASSBOHRER
MAN	
IKARUS	
<b>REF. NO</b>	
Contitech	661 N
Firestone	1R1C 390 310
Dunlop	D12 S02
Phoenix	1 E25
Goodyear	8018
CF Gomma	1S 310 38

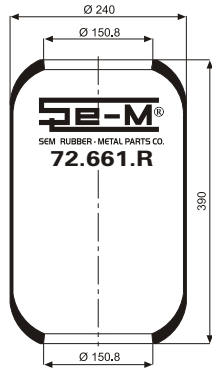


<b>TECHNICAL SPECIFICATION</b>	
Total Weight	: 2.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 335 mm.
Assembly Height	: 275 mm.
Loading Capacity	: 2500 kg.

SEM NO. **72.662.R**

Roll / Rolling Lobe Air Spring

<b>MODEL</b>	NEOPLAN
MAN	IVECO
IKARUS	
DAF	
<b>REF. NO</b>	
Contitech	662 N
Firestone	1R1D 355 355
Dunlop	D13 S01
Phoenix	1 E 32
Goodyear	9007
CF Gomma	1S 360-30

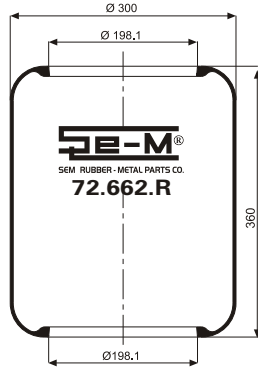


<b>TECHNICAL SPECIFICATION</b>	
Total Weight	: 2.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 390 mm.
Assembly Height	: 315 mm.
Loading Capacity	: 3250 kg.

SEM NO. **72.673.R**

Roll / Rolling Lobe Air Spring

<b>MODEL</b>	
DAF	
IVECO	
VOLVO	
<b>REF. NO</b>	
Contitech	673 N
Firestone	1R1A 370 285
Dunlop	D11 S06
Phoenix	1 F 21 A
Goodyear	9051
CF Gomma	1SC 285-22

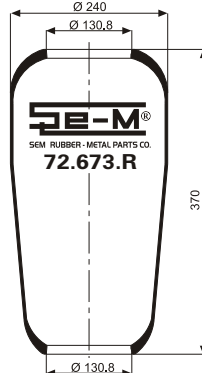

<b>TECHNICAL SPECIFICATION</b>	
Total Weight	: 1.90 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 310 mm.
Loading Capacity	: 2200 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.720.R**


Roll / Rolling Lobe Air Spring

**MODEL**

MAN NEOPLAN  
MERCEDES VOLVO

**REF. NO**

Contitech 720 N  
Firestone 1R2A 460 295  
Dunlop D12 S04  
Phoenix 1 F21  
Goodyear 9008  
Pirelli 1SC 290-30

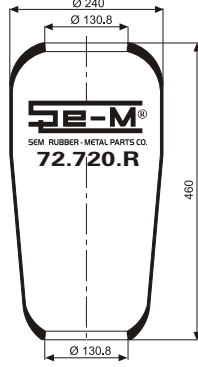

**TECHNICAL SPECIFICATION**

Total Weight : 2.00 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 325 mm.  
Assembly Height : 340 mm.  
Loading Capacity : 2150 kg.

SEM NO. **72.727.R**


Roll / Rolling Lobe Air Spring

**MODEL**

MAN VAN HOOL  
DAF VOLVO

**REF. NO**

Contitech 727 N  
Firestone 1R2D 460 360  
Dunlop D13 S04  
Phoenix 1F 32A  
Goodyear 8117  
Pirelli 1 SC 360 34

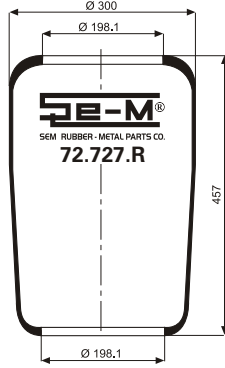

**TECHNICAL SPECIFICATION**

Total Weight : 2.70 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 390 mm.  
Assembly Height : 350 mm.  
Loading Capacity : 3200 kg.

SEM NO. **72.7803.C**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

VOLVO

**REF. NO**

Contitech 7803 N  
Firestone  
Dunlop  
Phoenix  
Goodyear  
CF Gomma

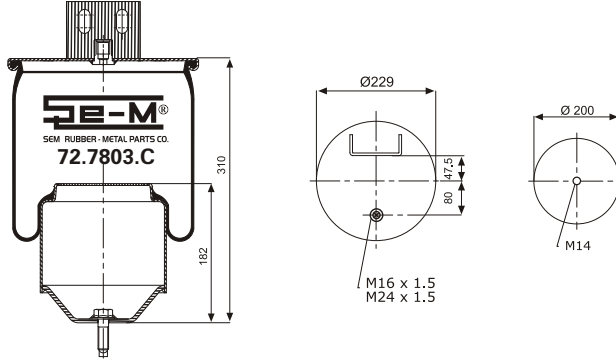

**TECHNICAL SPECIFICATION**

Total Weight : 9.80 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 290 mm.  
Assembly Height : 310 mm.  
Loading Capacity : 2000 kg.

SEM NO. **72.7803.S**


Metalli Pistonsuz / Service Assembly

**MODEL**

VOLVO

**REF. NO**

Contitech 7803 N  
Firestone  
Dunlop  
Phoenix  
Goodyear  
CF Gomma

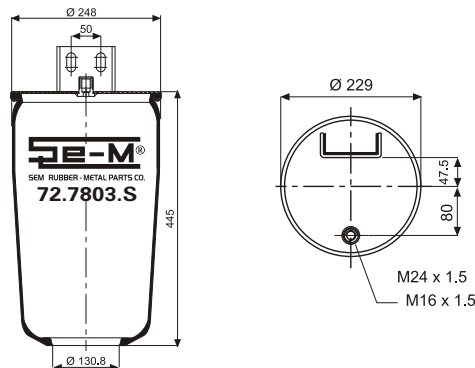

**TECHNICAL SPECIFICATION**

Total Weight : 6.00 kg.  
Operation Pressure : 5.0 bar  
Operation Space : 330 mm.  
Assembly Height : 300 mm.  
Loading Capacity : 2100 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.7804.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

VOLVO

**REF. NO**

Contitech 7804 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

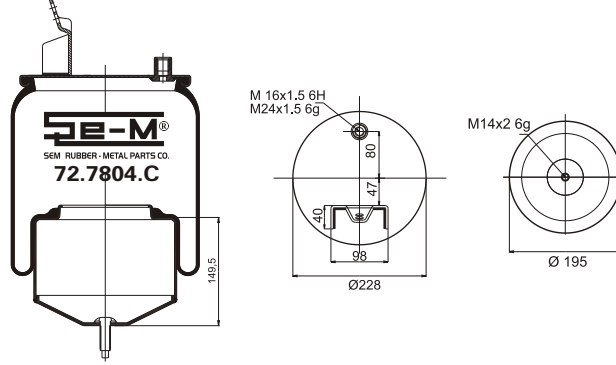

**TECHNICAL SPECIFICATION**

Total Weight : 6.70 kg.

Operation Pressure : 5.0 bar

Operation Space : 280 mm.

Assembly Height : 240 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.7804.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

VOLVO

**REF. NO**

Contitech 7804 N


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

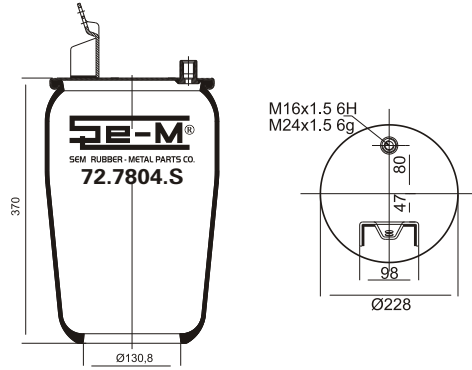

**TECHNICAL SPECIFICATION**

Total Weight : 4.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 280 mm.

Assembly Height : 240 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.810.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

VOLVO

ROR

SCANIA

**REF. NO**

Contitech 810 MB


Firestone 1T 19L-7

Dunlop SP 2067

Phoenix 1 D 28 A-2

Goodyear 1R14-059

CF Gomma 1T 19 E-1

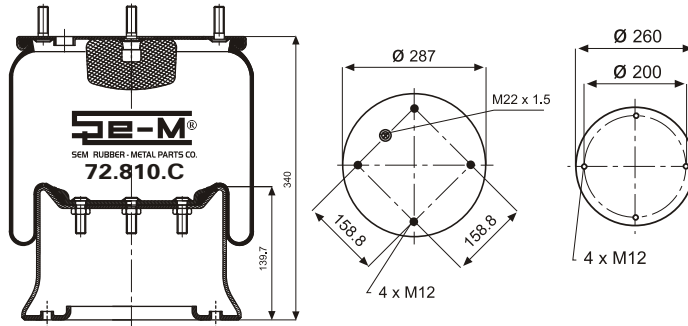

**TECHNICAL SPECIFICATION**

Total Weight : 12.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 370 mm.

Assembly Height : 340 mm.

Loading Capacity : 2900 kg.

SEM NO. **72.810.C1**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

**REF. NO**

Contitech 810 MB


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

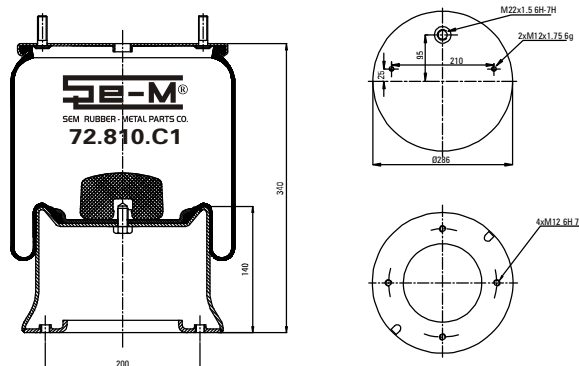

**TECHNICAL SPECIFICATION**

Total Weight : 12.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 370 mm.

Assembly Height : 340 mm.

Loading Capacity : 2900 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.810.CP**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**  
SAF  
GRANNING  
HENDRICKSON  
**REF. NO**

Contitech 810 MB P.P


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

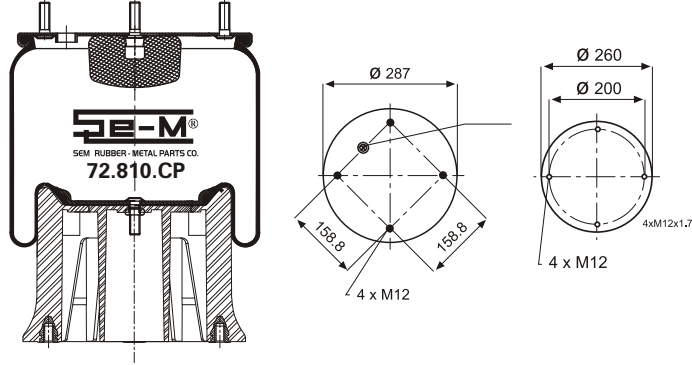

**TECHNICAL SPECIFICATION**

Total Weight	: 9.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 370 mm.
Assembly Height	: 340 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.810.S**

Metalli Pistonsuz / Service Assembly

**MODEL**  
SAF  
ROR

**REF. NO**

Contitech 810 MB/0


Firestone 1T 19L-7

Dunlop

Phoenix 1 DK 28A-4

Goodyear

CF Gomma 1T 19 E-1

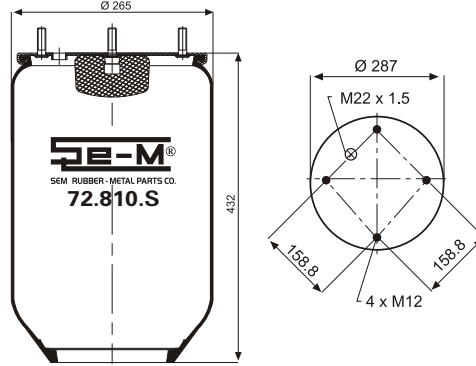

**TECHNICAL SPECIFICATION**

Total Weight	: 4.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 370 mm.
Assembly Height	: 340 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.810.S1**

Metalli Pistonsuz / Service Assembly

**MODEL**

**REF. NO**

Contitech 810 Mb1


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

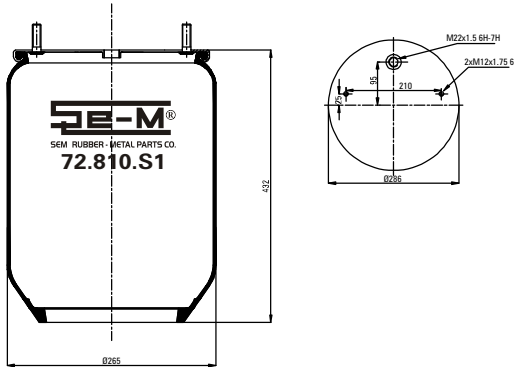

**TECHNICAL SPECIFICATION**

Total Weight	: 3.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 370 mm.
Assembly Height	: 340 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.810.ST**

Metalli Pistonsuz / Service Assembly

**MODEL**  
MAN

**REF. NO**

Contitech 810 NT


Firestone 1T 19L-7

Dunlop D14 U45

Phoenix 1 DK 28A

Goodyear 1R14-714

CF Gomma 1T10 E 1 S

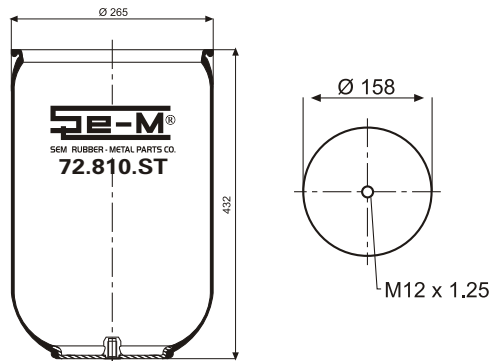

**TECHNICAL SPECIFICATION**

Total Weight	: 3.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 370 mm.
Assembly Height	: 340 mm.
Loading Capacity	: 2900 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.810.STB**


Metalli Pistonsuz / Service Assembly

**MODEL**

MAN

**REF. NO**

Contitech	810 NTB
Firestone	1T 19L-7
Dunlop	
Phoenix	1 DK 28 A-4
Goodyear	1R14-713
CF Gomma	1T 19 E-1

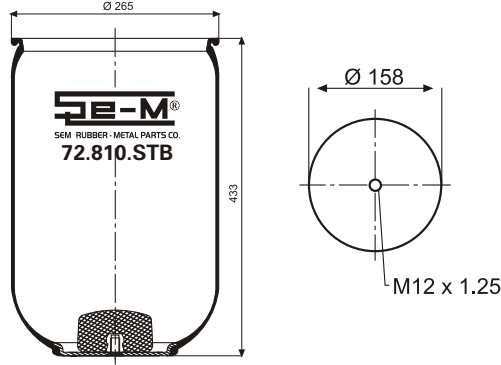

**TECHNICAL SPECIFICATION**

Total Weight	: 4.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 370 mm.
Assembly Height	: 340 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.813.C**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF GRANNING  
ROR HENDRICKSON

**REF. NO**

Contitech	813 MB
Firestone	1T19L-11
Dunlop	D13B19
Phoenix	1 D 28 B-2
Goodyear	
CF Gomma	1T 19 E-2

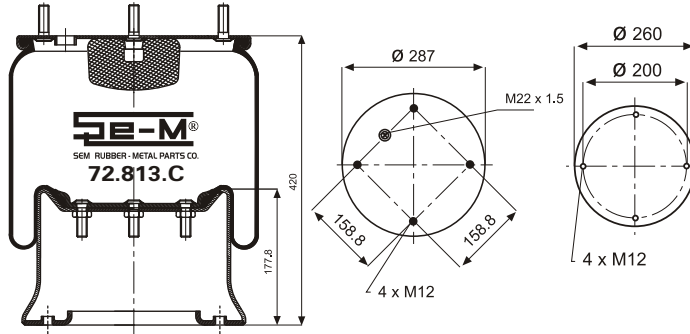

**TECHNICAL SPECIFICATION**

Total Weight	: 13.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 360 mm.
Assembly Height	: 420 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.813.C2**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

SAF

**REF. NO**

Contitech	813 MB 2
Firestone	1T 19L-11
Dunlop	D13 B19
Phoenix	1 D 28 B-2
Goodyear	
CF Gomma	1T 19 R-2

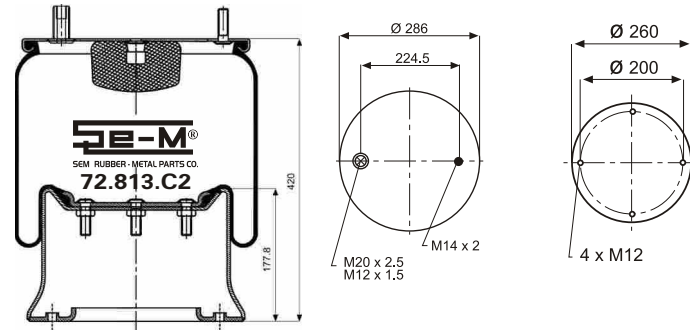

**TECHNICAL SPECIFICATION**

Total Weight	: 13.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 360 mm.
Assembly Height	: 420 mm.
Loading Capacity	: 2900 kg.


SEM NO. **72.813.C3**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

**REF. NO**

Contitech	
Firestone	813 Mb3
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

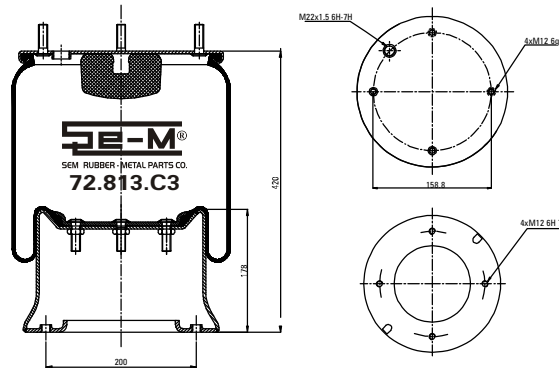

**TECHNICAL SPECIFICATION**

Total Weight	: 13.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 360 mm.
Assembly Height	: 420 mm.
Loading Capacity	: 2900 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.813.CP**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SAF

**REF. NO**

Contitech	813 MB P.P.
Firestone	1T 15 MPW-9
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

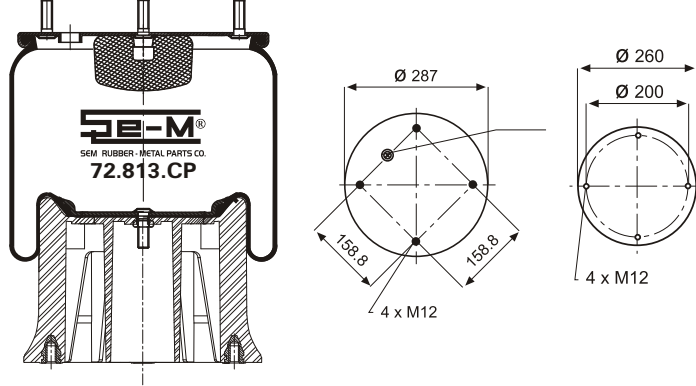

**TECHNICAL SPECIFICATION**

Total Weight	: 8.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 360 mm.
Assembly Height	: 420 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.813.S**


Metalli Pistonsuz / Service Assembly

**MODEL**

SAF

**REF. NO**

Contitech	813 MB/0
Firestone	1T19L-11
Dunlop	D13 B02
Phoenix	1 D 28 B-5
Goodyear	1R14-705
CF Gomma	1T 19 E-2

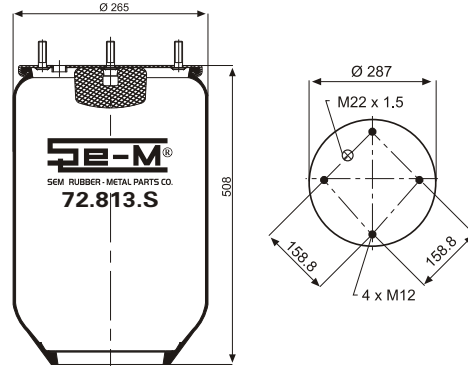

**TECHNICAL SPECIFICATION**

Total Weight	: 5.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 360 mm.
Assembly Height	: 420 mm.
Loading Capacity	: 2900 kg.

SEM NO. **72.8185.CP**


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

SCHMITZ

**REF. NO**

Contitech	8185 K
Firestone	1T 15 MPW-9
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

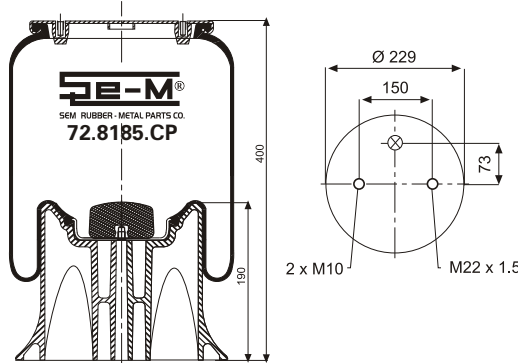

**TECHNICAL SPECIFICATION**

Total Weight	: 7.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2400 kg.

SEM NO. **72.8185.S**


Metalli Pistonsuz / Service Assembly

**MODEL**

SCHMITZ

**REF. NO**

Contitech	8185
Firestone	1T 15 MPW-9
Dunlop	
Phoenix	
Goodyear	
CF Gomma	

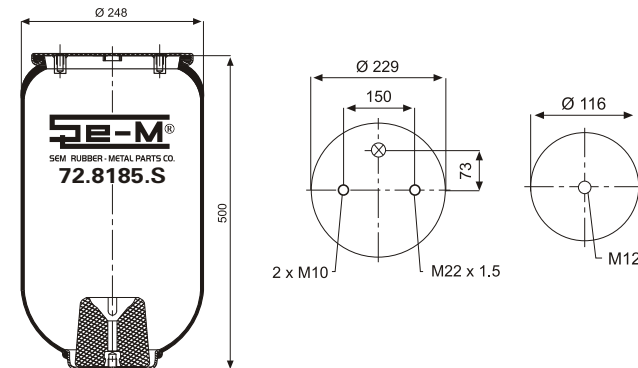

**TECHNICAL SPECIFICATION**

Total Weight	: 4.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 400 mm.
Loading Capacity	: 2400 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.836.2C1**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech	836 M2 K1
Firestone	1T 17AR-4.5
Dunlop	D13 U31
Phoenix	1 DF 25-13
Goodyear	1R12-711
CF Gomma	

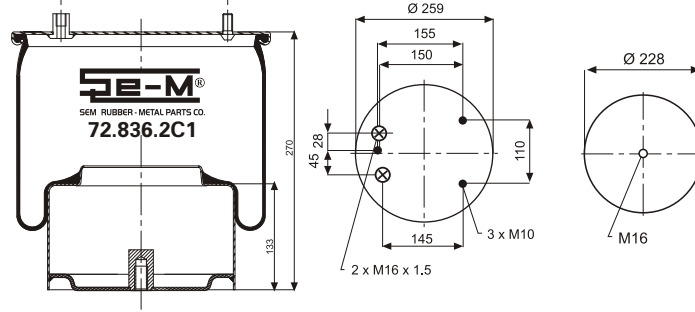

**TECHNICAL SPECIFICATION**

Total Weight	: 9.70 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

SEM NO. **72.836.C1**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech	836 MK1
Firestone	1T 17AR-4.5
Dunlop	D13 B32
Phoenix	1 DF 25-11
Goodyear	1R12-712
CF Gomma	

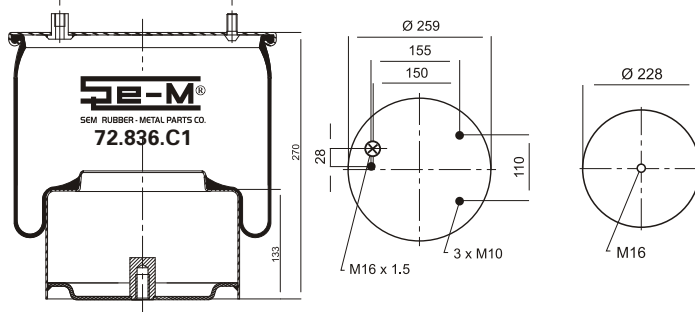

**TECHNICAL SPECIFICATION**

Total Weight	: 9.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

SEM NO. **72.836.C4**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech	836 MB K4
Firestone	1T 17AR-4.5
Dunlop	
Phoenix	1 DF 25-14
Goodyear	
CF Gomma	

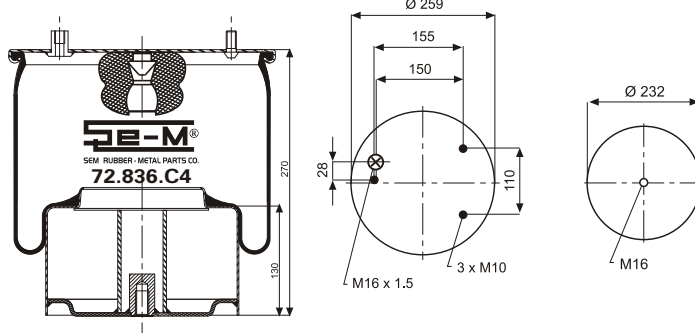

**TECHNICAL SPECIFICATION**

Total Weight	: 10.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

SEM NO. **72.836.C6**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech	836 MB K6
Firestone	1T 17AR-4.5
Dunlop	D13 B43
Phoenix	1 DF 25-15
Goodyear	1R12-768
CF Gomma	

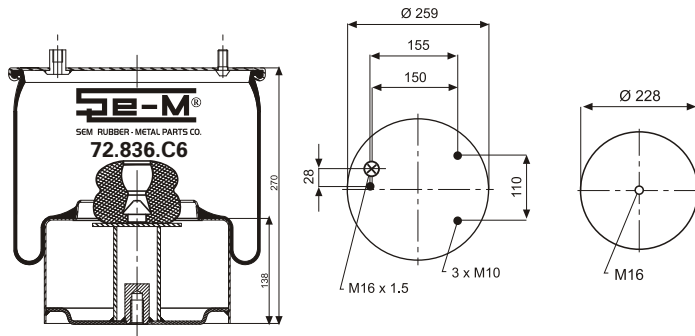

**TECHNICAL SPECIFICATION**

Total Weight	: 10.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.



Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.836.C7**


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech	836 M K7
Firestone	1T 17AR-4.5
Dunlop	D13 B33
Phoenix	1 DF 25-12
Goodyear	1R12-723
CF Gomma	

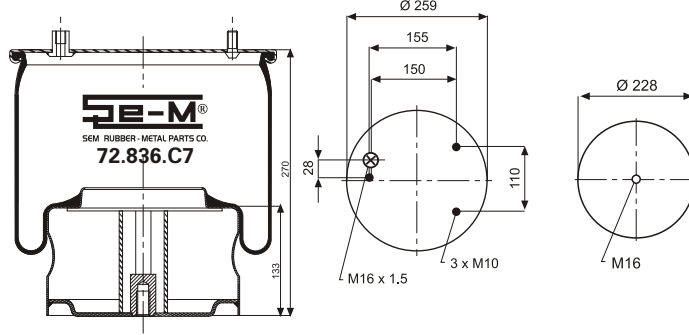

**TECHNICAL SPECIFICATION**

Total Weight	: 9.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

SEM NO. **72.836.S**


Metalli Pistonsuz / Service Assembly

**MODEL**

DAF

**REF. NO**

Contitech	838 M
Firestone	1T17AR-4.5
Dunlop	D13 U32
Phoenix	1 DF 25-1
Goodyear	1R12-700
CF Gomma	

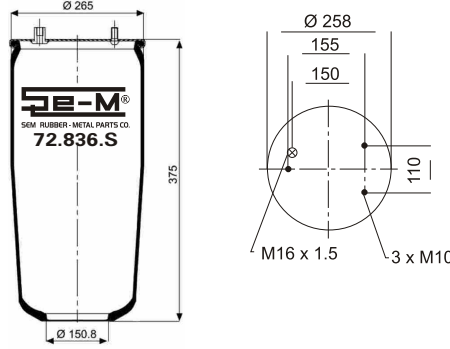

**TECHNICAL SPECIFICATION**

Total Weight	: 4.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

SEM NO. **72.836.S1**


Metalli Pistonsuz / Service Assembly

**MODEL**

DAF

**REF. NO**

Contitech	836 MB
Firestone	1T 17AR-4.5
Dunlop	D12 U27
Phoenix	1 DF 25-4
Goodyear	1R12-764
CF Gomma	

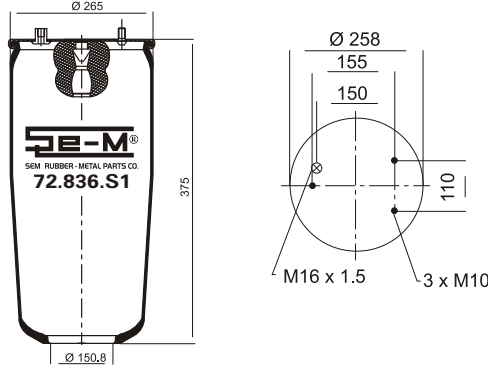

**TECHNICAL SPECIFICATION**

Total Weight	: 5.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

SEM NO. **72.836.S2**


Metalli Pistonsuz / Service Assembly

**MODEL**

DAF

**REF. NO**

Contitech	836 M2
Firestone	1T 17AR-4.5
Dunlop	D13 U31
Phoenix	1 DF 25-3
Goodyear	1R12-710
CF Gomma	

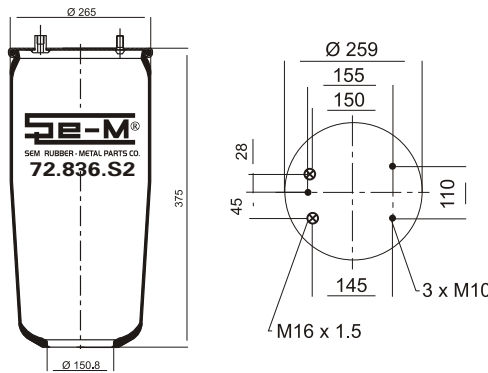

**TECHNICAL SPECIFICATION**

Total Weight	: 4.30 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 340 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2600 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. 72.881.C


Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

BPW

**REF. NO**

Contitech	881 MB
Firestone	1T 66F-10.8
Dunlop	D14 B36
Phoenix	1 DK 32
Goodyear	1R14-712
CF Gomma	1TC 360 45

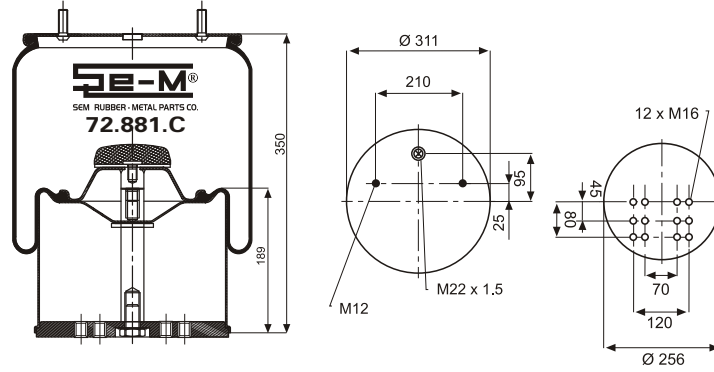

**TECHNICAL SPECIFICATION**

Total Weight	: 16.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 380 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 3300 kg.

SEM NO. 72.881.CP


Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

BPW

**REF. NO**

Contitech	881 MB
Firestone	1T 66F-10.8
Dunlop	D14 B41
Phoenix	1DK 32
Goodyear	1R14-748
CF Gomma	1TC 360-45

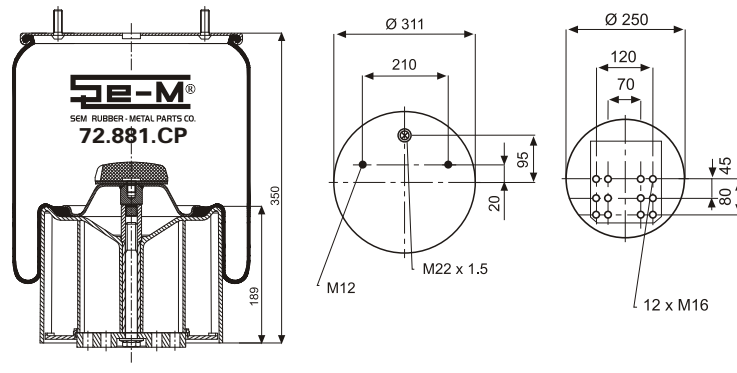

**TECHNICAL SPECIFICATION**

Total Weight	: 13.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 380 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 3300 kg.

SEM NO. 72.881.S


Metalli Pistonsuz / Service Assembly

**MODEL**

BPW

**REF. NO**

Contitech	881 MB
Firestone	1T 66F-10.8
Dunlop	D14 U36
Phoenix	1 DK 32
Goodyear	1R14-708
CF Gomma	1TC 360-45

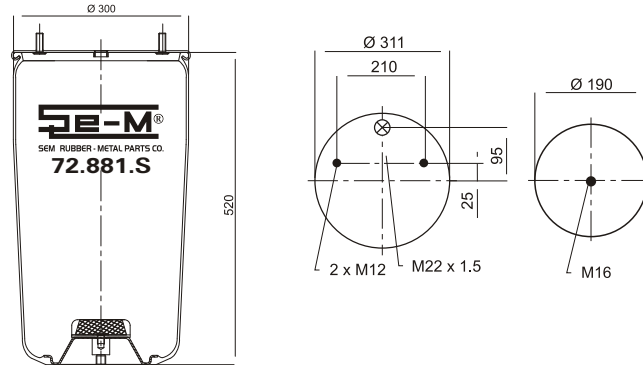

**TECHNICAL SPECIFICATION**

Total Weight	: 13.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 380 mm.
Assembly Height	: 350 mm.
Loading Capacity	: 3300 kg.

SEM NO. 72.882.R1


Roll / Rolling Lobe Air Spring

**MODEL**

MAN  
MERCEDES

**REF. NO**

Contitech	882 N1
Firestone	1R4R 465 260
Dunlop	D12 S12
Phoenix	1 F 16-1
Goodyear	9048
CF Gomma	1 SC 250-28

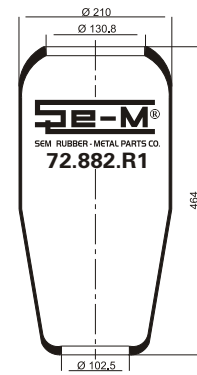

**TECHNICAL SPECIFICATION**

Total Weight	: 1.80 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 290 mm.
Assembly Height	: 275 mm.
Loading Capacity	: 1550 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.887.2C1**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech 887 M2K1


Firestone 1T15 NLR-3

Dunlop

Phoenix

Goodyear

CF Gomma

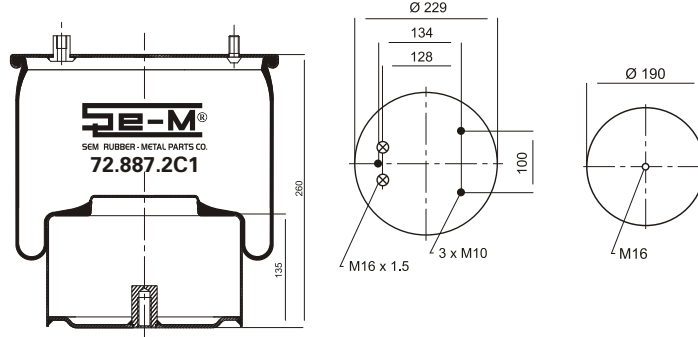

**TECHNICAL SPECIFICATION**

Total Weight : 8.50 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.887.C1**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech 887 MK1


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

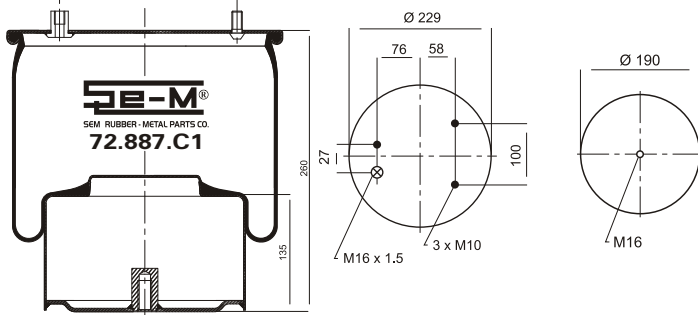

**TECHNICAL SPECIFICATION**

Total Weight : 8.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.887.C6**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech 887 MB K6


Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

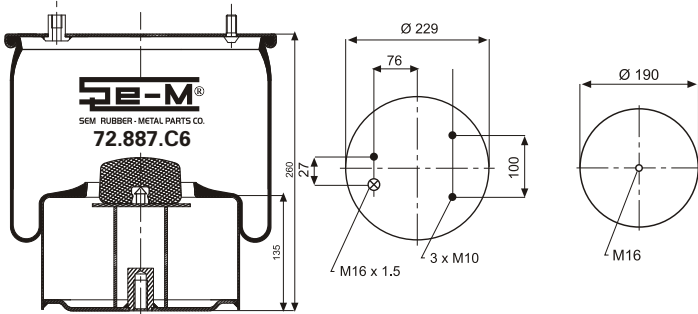

**TECHNICAL SPECIFICATION**

Total Weight : 8.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1900 kg.

SEM NO. **72.887.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

DAF

**REF. NO**

Contitech 887 M


Firestone 1T15 LNR-3

Dunlop D11 U41

Phoenix

Goodyear 1R11-796

CF Gomma

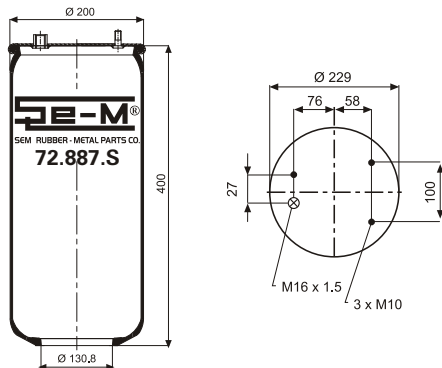

**TECHNICAL SPECIFICATION**

Total Weight : 4.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 300 mm.

Assembly Height : 260 mm.

Loading Capacity : 1900 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.889.C2**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

DAF

**REF. NO**

Contitech 889 MK 2




Firestone 1T15LR

Dunlop

Phoenix

Goodyear

CF Gomma

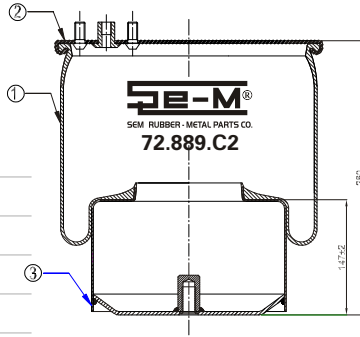

**TECHNICAL SPECIFICATION**

Total Weight	: 7.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 330 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.889.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

SAF

**REF. NO**

Contitech 889 M



Firestone

Dunlop

Phoenix

Goodyear

CF Gomma

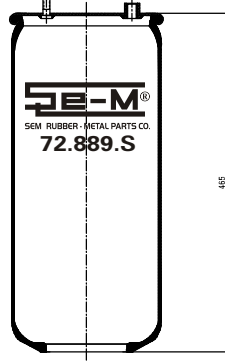

**TECHNICAL SPECIFICATION**

Total Weight	: 3.50 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 330 mm.
Assembly Height	: 270 mm.
Loading Capacity	: 2100 kg.

SEM NO. **72.916.R1**

Roll / Rolling Lobe Air Spring

**MODEL**

MAN

**REF. NO**

Contitech 916 N1


Firestone

Dunlop D12 S05

Phoenix 1F 21 C-5

Goodyear 9016

CF Gomma

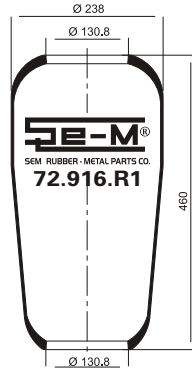

**TECHNICAL SPECIFICATION**

Total Weight	: 2.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 310 mm.
Assembly Height	: 265 mm.
Loading Capacity	: 2150 kg.

SEM NO. **72.940.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

BPW

**REF. NO**

Contitech 940 MB m.K




Firestone 1T 17D 4.3

Dunlop D11 U31

Phoenix 1 DK 21 K

Goodyear 1R11-703

CF Gomma

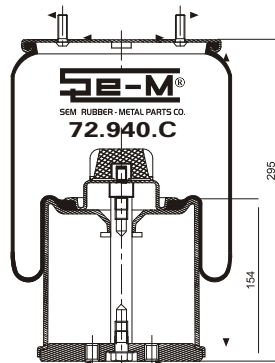

**TECHNICAL SPECIFICATION**

Total Weight	: 15.00 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 295 mm.
Loading Capacity	: 2100 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.940.CP**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

BPW

**REF. NO**

Contitech 940 MB P.P.


Firestone 1T 17D 4.3

Dunlop D11 U36

Phoenix 1 DK 21 K

Goodyear 1R11-752

CF Gomma

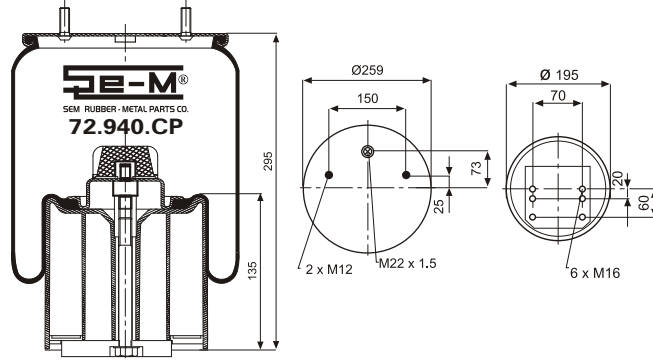

**TECHNICAL SPECIFICATION**

Total Weight : 12.00 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 295 mm.

Loading Capacity : 2100 kg.

SEM NO. **72.940.S**

Metalli Pistonsuz / Service Assembly

**MODEL**

BPW

**REF. NO**

Contitech 940 MB o.K


Firestone 1T 17D 4.3

Dunlop D11 U31

Phoenix 1 DK 21 K

Goodyear 1R11-703

CF Gomma

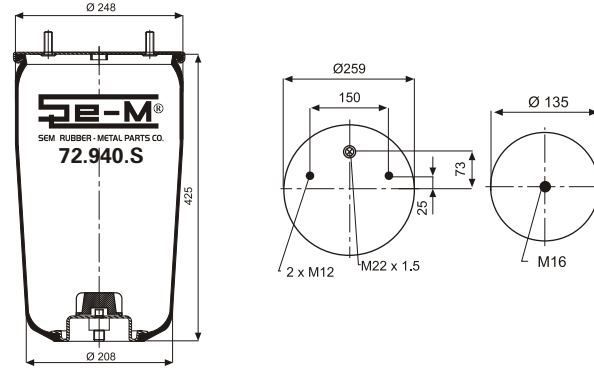

**TECHNICAL SPECIFICATION**

Total Weight : 4.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 295 mm.

Loading Capacity : 2100 kg.

SEM NO. **72.941.C**

Komple Metal Pistonlu / Complete With Steel Piston

**MODEL**

BPW

**REF. NO**

Contitech 941 MB m.K.


Firestone 1T 17D 8.3

Dunlop D11 U38

Phoenix 1 DK 21

Goodyear 1R11-702

CF Gomma 1TC 300-36

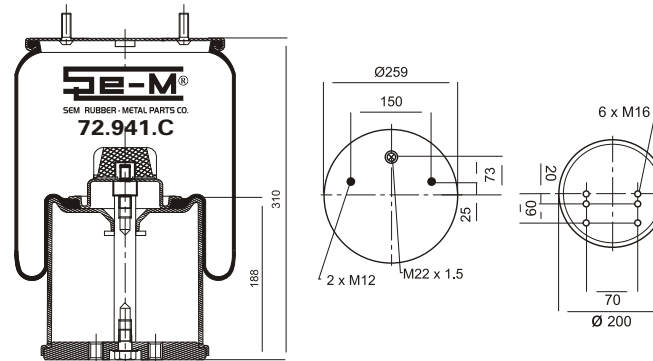

**TECHNICAL SPECIFICATION**

Total Weight : 15.80 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 310 mm.

Loading Capacity : 2100 kg.

SEM NO. **72.941.CP**

Komple Plastik Pistonlu / Complete With Plastic Piston

**MODEL**

BPW

**REF. NO**

Contitech 941 MB P.P.


Firestone 1T 17D 8.3

Dunlop D11 B33

Phoenix 1 DK 21

Goodyear 1R11-743

CF Gomma 1TC 300-36

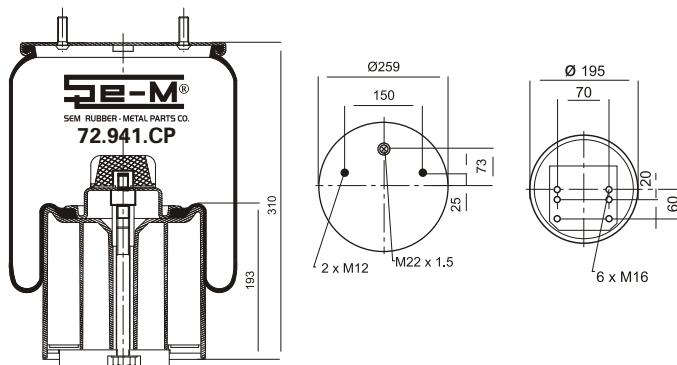

**TECHNICAL SPECIFICATION**

Total Weight : 13.30 kg.

Operation Pressure : 5.0 bar

Operation Space : 325 mm.

Assembly Height : 310 mm.

Loading Capacity : 2100 kg.

Süspansiyon Körükleri Grubu / Air Springs Group

SEM NO. **72.941.S**



Metalli Pistonsuz / Service Assembly

**MODEL**

BPW

**REF. NO**

Contitech	941 MB o.K.
Firestone	1T 17D 8.3
Dunlop	D11 U30
Phoenix	1DK-21
Goodyear	1R11-700
CF Gomma	1TC 300 36

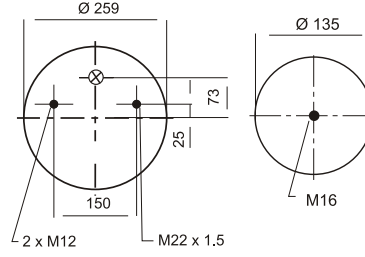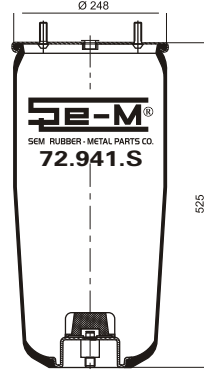

**TECHNICAL SPECIFICATION**

Total Weight	: 5.10 kg.
Operation Pressure	: 5.0 bar
Operation Space	: 325 mm.
Assembly Height	: 310 mm.
Loading Capacity	: 2100 kg.



SEM NO.	CONTITECH	FRESTONE	DUNLOP	PHOENIX	GOODYEAR	CF GOMMA	SAYFA/PAGE
72.0081.C	-	1T 17 B-11	D13B42	-	1 R13-150	-	346
72.1885.R1	1885 N1	1R2A445 280	D12S07	1 F 20 B	9003	1 SC 270-28	346
72.4004.C03	4004 NP03	-	-	-	-	-	346
72.4004.CP03	4004 NP03	1 T 17BS-6	D12 B13	1 DK 22 E-8	1R11-713	1T323-33	346
72.4004.S02	4004 NP02	1T 17BS-6	D12 U13	1 DK 22 E-5 NP	1R11-705	1T19E-5	347
72.4022.C02	4022 NP02	1T 17BS-6	D12 B14	1 DK 22 E-9	1R11-714	1T 300-37	347
72.4022.C03	4022 NP03	-	-	-	-	-	347
72.4022.CP02	4022 N2	1T 17BS-6	D12 B14	1 DK 22 E-9	1R11-714	1T 300-37	347
72.4022.CP03	4022 NP03	1T17BS-6	D12B14	1 DK 22 E-9	1R11-781	1T 300-37	348
72.4022.CP05	4022 NP05	1T 17BS-6	D11 B41	1 DK 22 E-11	1R11-781	-	348
72.4022.S02	4022 NP02	1T 17BS-6	D11 U40	1 DK 22 E-9 NP	1R11-709	-	348
72.40301.C	-	1T 15VR-3	-	-	-	-	348
72.40302.C	-	1T 15VFR-3	-	-	-	-	349
72.40303.C	-	-	-	-	-	-	349
72.40304.C	-	-	-	-	-	-	349
72.40305.C	-	-	-	-	-	-	349
72.40306.C	-	-	-	-	-	-	350
72.40307.C	1440307	-	-	-	-	-	350
72.4156.C04	4156 NP04	1T 15M-6	D12 B33	-	1R12-716	1T 323-33	350
72.4156.C06	4156 NP06	1T 15M-6	D12 B19	1DK-21A-2	1R12-719	1T323-33	350
72.4156.C07	4156 NP07	-	-	1DK 23 K-28	-	-	351
72.4156.C09	4156 NP09	1T 15M-6	D12 B16	-	1R12-706	-	351
72.4156.C11	4156 NP11	-	-	-	-	-	351
72.4156.CP10	4156 NP10	1D 15M-6	-	-	-	-	351
72.4156.CP14	4156 NP14	-	D12 B33	1DK 23 K-9082	1R12-716	1T323-32	352
72.4156.CP15	4156 NP15	1T 15M-6	D12 B19	-	1R12-719	1T 323-33	352
72.4156.CP16	4156 NP16	-	-	-	-	-	352
72.4156.S01	4156 NP01	-	-	-	-	-	352
72.4156.S05	4156 NP05	-	-	-	-	1T 323-33	353
72.4156.S12	4156 NP12	-	-	-	-	-	353
72.4157.CP03	4157 NP03	-	-	-	-	-	353
72.4157.CP04	4157 NP04	1T 15MPW-7	D12 B18	1 DK 21 A-4	1R11-111	-	353
72.4157.CP05	4157 NP05	1T 15MPW-7	D12 B17	1 DK 21 A-3	1R11-106	-	354
72.4157.CP06	4157 NP06	1T15MPW-7	D11 B37	1 DK 20 A-1	1R11-764	-	354
72.4157.CP08	4157 NP08	-	D12 B30	1 DK 20 C-2	1R11-773	-	354
72.4157.CP09	4157 Np09	1T 15MPW-7	D12 B17	1 DK 21 A-31	1R11-106	-	354
72.4157.CP10	4157 NP10	-	D12 B19	1DK 20 A-51	-	-	355
72.4157.S	4157 N	-	-	-	-	-	355
72.4157.S02	4157 NP02	-	-	-	-	-	355
72.4158.CP03	4158 NP03	1T 15MPW-9	D12 B22	1 DK 20 B-1	1R12-749	-	355
72.4158.S02	4158 NP02	1T 15MPW-9	D12 U23	1 DK 20 B-1 NP	1R12-748	-	356
72.4159.C03	4159 NP03	1T 15M-9	D12 B08	1 DK 23 L-27	-	1T323-40	356
72.4159.C04	4159 NP04	1T 15M-9	012B34	1 DK 21 B-2	1B 12-717	1T 323-40	356
72.4159.C06	4159 NP06	1T 15M-9	D12B01	1 DK 21 B-2	1R12-701	1T 323-40	356
72.4159.C07	4159 NP07	-	D12 B15	1 DK 23 L-25	1R12-702	1T 323-40	357
72.4159.C08	4159 NP08	-	-	-	1R12-281	-	357
72.4159.C10	4159 NP10	-	-	-	-	-	357
72.4159.C15	4159 Np15	-	-	-	-	-	357

SEM NO.	CONTITECH	FRESTONE	DUNLOP	PHOENIX	GOODYEAR	CF GOMMA	SAYFA/PAGE
72.4159.CP09	4159 NP09	1T 15M-9	D12 B04	1 DK 23 L-9131	1R12-721	-	358
72.4159.CP11	4159 NP11	-	-	-	-	-	358
72.4159.CP12	4159 NP11	-	-	1 DK 23L-9101	-	1T 323-40	358
72.4159.CP13	4159 NP13	-	-	1 DK 23L9192	-	-	358
72.4159.CP14	4159 NP14	1T 15M-9	-	1 DK 21 B-4	-	1T 323-40	359
72.4159.S01	4159 NP01	1T 15M-9	-	1 DK 21 B-2/6	1R12-113	1T 323-40	359
72.4159.S05	4159 NP05	1T 15M-9	D12 U04	1 DK 21 B-5 NP	1R12-761	1T 323-40	359
72.4183.C01	4183 NP01	-	-	-	-	-	359
72.4183.C21	4183 NP21	-	-	-	-	-	360
72.4183.C24	4183 NP24	-	-	-	-	-	360
72.4183.S1	4183 N1	-	-	-	-	-	360
72.4390.C01	4390 NP01	-	D12 T10	1 KF 21-1	9505	-	360
72.4390.C02	4390 NP02	-	D12 T11	1 KF 21-2	9506	-	361
72.4390.C03	4390 NP03	-	D12 T11	-	9506	-	361
72.4390.C04	4390 NP04	-	-	-	-	-	361
72.4390.C21	4390 NP21	-	-	-	-	-	361
72.4390.C22	4390 NP22	-	-	-	-	-	362
72.4390.C23	4390 NP24	-	-	-	-	-	362
72.4390.C24	4390 NP24	-	-	-	-	-	362
72.4390.S1	4390 N1	-	D12 U25	1 KF 21-1 NP	9507	-	362
72.4390.S2	4390 N2	-	D12 U26	1 KF 21-2 NP	9508	-	363
72.4713.C02	4713 NP02	-	D12 B24	1 DF 22 C-1	1R12-762	-	363
72.4713.S	4713 N o.k.	-	D12 U24	-	1R12-763	-	363
72.4718.C01	4718 NP01	-	-	-	-	-	363
72.4718.S	4718 N. o.K.	-	-	-	-	-	364
72.4757.C01	4157 NP01	-	D13 T01	-	9519	-	364
72.4757.C09	4157 NP09	-	D13 T02	-	9520	-	364
72.4757.C21	4757 NP21	-	-	-	-	-	364
72.4757.C29	4757 NP29	-	-	-	-	-	365
72.4757.S1	4757 N1	-	D13 U42	-	9517	-	365
72.4757.S2	4757 N2	-	D13 U43	-	9518	-	365
72.4813.C07	4813 NP07	1T 19L-11	D13 B10	1D 28 B-9	1R14-727	1T19E-2 BR	365
72.4813.S	4813 MB/0	-	-	-	-	-	366
72.4838.C01	4838 NP01	-	-	-	-	-	366
72.4838.C02	4838 NP02	-	D13 T03	-	9522	-	366
72.4838.C03	4838 NP03	-	-	-	-	-	366
72.4838.C21	4838 NP21	-	-	-	-	-	367
72.4838.C22	4838 NP22	-	-	-	-	-	367
72.4838.C23	4838 NP23	-	-	-	-	-	367
72.4838.S1	4838 N1	-	-	-	-	-	367
72.4881.C	4881 MB	1T 66D-7.0	D14 B37	1 DK 32 K	1R14-724	-	368
72.4881.CP	4881 MB	1T 66D-7.0	D14 B44	1 DK 32 K	1R14-757	-	368
72.4881.S02	4881 NP02	1T 66D-7.0	D14 U37	1 DK 32 K	1R14-701	-	368
72.4882.C05	4882 N1 P05	-	-	-	-	-	368
72.4882.S02	4882 N1 P02	-	D10 U01	-	1R10-702	-	369
72.4883.C05	4883 N1 P05	-	-	-	-	-	369
72.4883.S02	4883 N1 P02	-	D11 U47	-	1R11-804	-	369
72.4884.C06	4884 N1 P06	-	-	-	-	-	369

SEM NO.	CONTITECH	FRESTONE	DUNLOP	PHOENIX	GOODYEAR	CF GOMMA	SAYFA/PAGE
72.4884.S02	4884 N1 P02	-	D11 U48	-	1R11-820	-	370
72.4912.C07	4912 NP07	1T 19L-14	D13 B40	1 DK 28 F-4	1R13-711	-	370
72.4912.C10	4912 NP10	-	-	-	-	-	370
72.4912.S08	4912 NP08	-	D13 U40	-	1R13-713	-	371
72.4912.S10	4912 NP10	-	-	-	-	-	371
72.4913.C02	4913 NP02	1T19L-14	D14 B42	1 D 28 H-16	1R14-753	-	371
72.4913.S04	4913 NP04	-	D14 U42	1D 28 H-16 NP	1R14-755	-	371
72.4915.C06	4159 NP06	-	-	1DK 19-1	-	-	372
72.4915.S03	4159 NP03	-	-	-	-	-	372
72.6416.C	6416 N	-	-	-	-	-	372
72.6416.S	6416 N	-	-	-	-	-	372
72.6418.C	6418 N	-	-	-	-	-	373
72.6418.S	6418 N	-	-	-	-	-	373
72.6420.C	6420 N	-	-	-	-	-	373
72.6420.S	6420 N	-	-	-	-	-	373
72.644.R	644 N	1R1A 390 295	D11 S01	1 E 21	8017	1S 285-24	374
72.661.R	661 N	1R1C 390 310	D12 S02	1 E 25	8018	1S 310 38	374
72.662.R	662 N	1R1D 355 355	D13 S01	1 E 32	9007	1S 360-30	374
72.673.R	673 N	1R1A 370 285	D11 S01	1 F 21 A	9051	1SC 285-22	374
72.720.R	720 N	1R2A 460 295	D12 S04	1 F21	9008	1SC 290-30	375
72.727.R	727 N	1R2D 460 360	D13 S04	1F 32A	8117	1 SC 360 34	375
72.7803.C	7803 N	-	-	-	-	-	375
72.7803.S	7803 N	-	-	-	-	-	375
72.7804.C	7804 N	-	-	-	-	-	376
72.7804.S	7804 N	-	-	-	-	-	376
72.810.C	810 MB	1T 19L-7	SP 2067	1D 28 A-2	1R14-059	1T 19 E-1	376
72.810.C1	810 MB	-	-	-	-	-	376
72.810.CP	810 MB P.P	-	-	-	-	-	377
72.810.S	810 MB/0	1T 19L-7	-	1DK 28A-4	-	1T 19 E-1	377
72.810.S1	810 MB1	-	-	-	-	-	377
72.810.ST	810 NT	1T 19L-7	D14 U45	1DK 28A	1R14-714	1T10 E 1 S	377
72.810.STB	810 NTB	1T 19L-7	-	1D 23 B-2	1R14-713	1T 19 E-1	378
72.813.C	813 MB	1T19L-11	D13B19	1 D 28 B-2	-	1T 19 E-2	378
72.813.C2	813 MB 2	1T 19L-11	D13B19	1 D 28 B-2	-	1T 19 R-2	378
72.813.C3	813 MB 3	-	-	-	-	-	378
72.813.CP	813 MB P.P.	1T 15 MPW-9	-	-	-	-	379
72.813.S	813 MB/0	1T19L-11	D13 B02	1 D 28 B-5	1R14-705	1T 19 E-2	379
72.8185.CP	8185 K	1T 15 MPW-9	-	-	-	-	379
72.8185.S	8185	1T 15 MPW-9	-	-	-	-	379
72.836.2C1	836 M2 K1	1T 17AR-4.5	D13 U31	1 DF 25-13	1R12-711	-	380
72.836.C1	836 MK1	1T 17AR-4.5	D13 B32	1 DF 25-11	1R12-712	-	380
72.836.C4	836 MB K4	1T 17AR-4.5	-	1 DF 25-14	-	-	380
72.836.C6	836 MB K6	1T 17AR-4.5	D13 B43	1 DF 25-15	1R12-768	-	380
72.836.C7	836 M K7	1T 17AR-4.5	D13 B33	1 DF 25-12	1R12-723	-	381
72.836.S	838 M	1T 17AR-4.5	D13 U32	1 DF 25-1	1R12-700	-	381
72.836.S1	836 MB	1T 17AR-4.5	D12 U27	1 DF 25-4	1R12-764	-	381
72.836.S2	836 M2	1T 17AR-4.5	D13 U31	1 DF 25-3	1R12-710	-	381
72.881.C	881 MB	1T 66F-10.8	D14 B36	1 DK 32	1R14-712	1TC 360 45	382

[illegible]